

Panel Potentiometer

Model P08x Series



Features:

- 8 mm square
- Dust proof
- Detent option
- 100,000 cycle life
- Rotary switch option
- Multiple gangs available



Model Styles Available

Side Adjust, Potentiometer Module (Up to 4 gangs)	P08xN
Side Adjust, Potentiometer with Rotary Switch Module (Up to 4 gangs)	P08xS
Side Adjust, Potentiometer with Dual Shaft Module (2 or 4 gang)	P08xD
Side Adjust, Potentiometer with Dual Shaft and Rotary Switch Module (2 or 4 gang)	P08xE

Electrical

Resistance Range, Ohms	500 -1M (for "B" taper) 1K-1M (for other tapers)
Standard Resistance Tolerance	± 20%
Residual Resistance, Maximum	50 ohms
Input Voltage, Maximum	50 Vac
Power rating, Watts	0.05W- B taper, 0.025W- others
Dielectric Strength	300Vac, sea level
Insulation Resistance, Minimum	100 Megohms
Gang Error (Multi-ganged), Maximum	+/-3 dB (-40 dB to 0dB)
Actual Electrical Travel, Nominal	With Switch = 230° Without Switch =270°
Switch Contact Resistance, Maximum	100 milliohms max.
Switch Power Rated	3.0A at 16Vdc

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	42 oz-in
Rotational Torque, Maximum	0.7 oz-in (0.2 oz-in each additional gang)
Switch Detent,	1.0 oz-in
Switch Travel angle	50°

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Environmental


Operating Temperature Range	-55°C to +125°C	
Rotational Life	Switch = 30,000 cycles	Potentiometer = 100,000 cycles
IP Rating	Dust Proof = IP50	

Ordering


P08xN - POTENTIOMETER MODULE

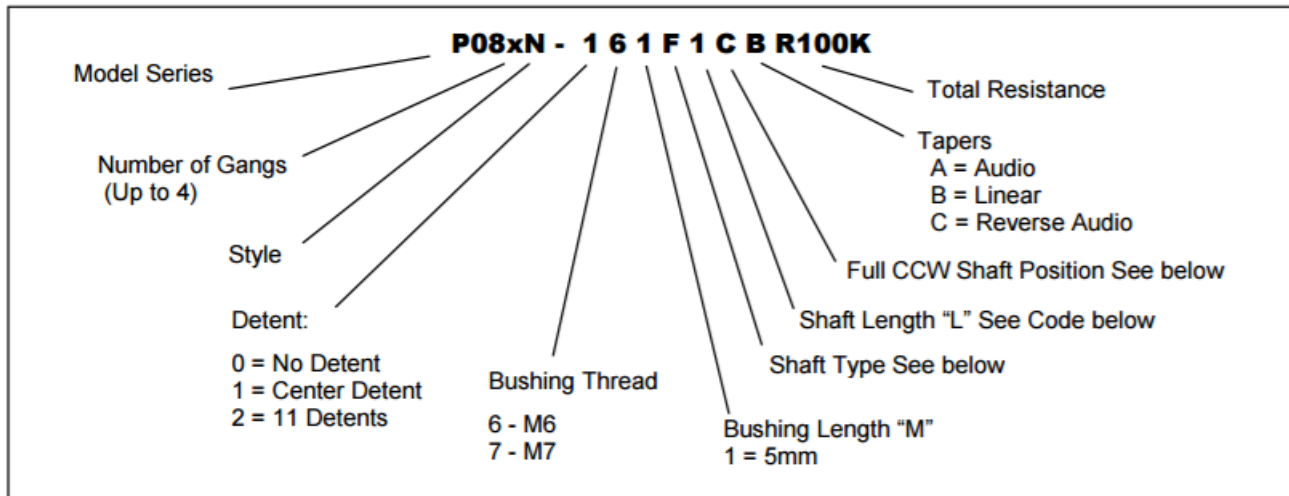


P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

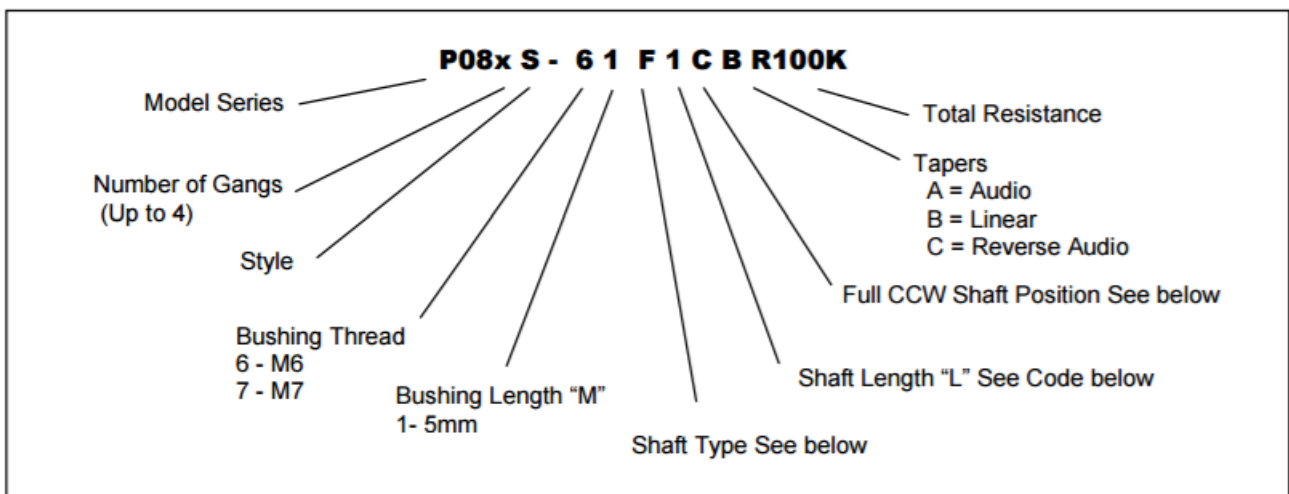

P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

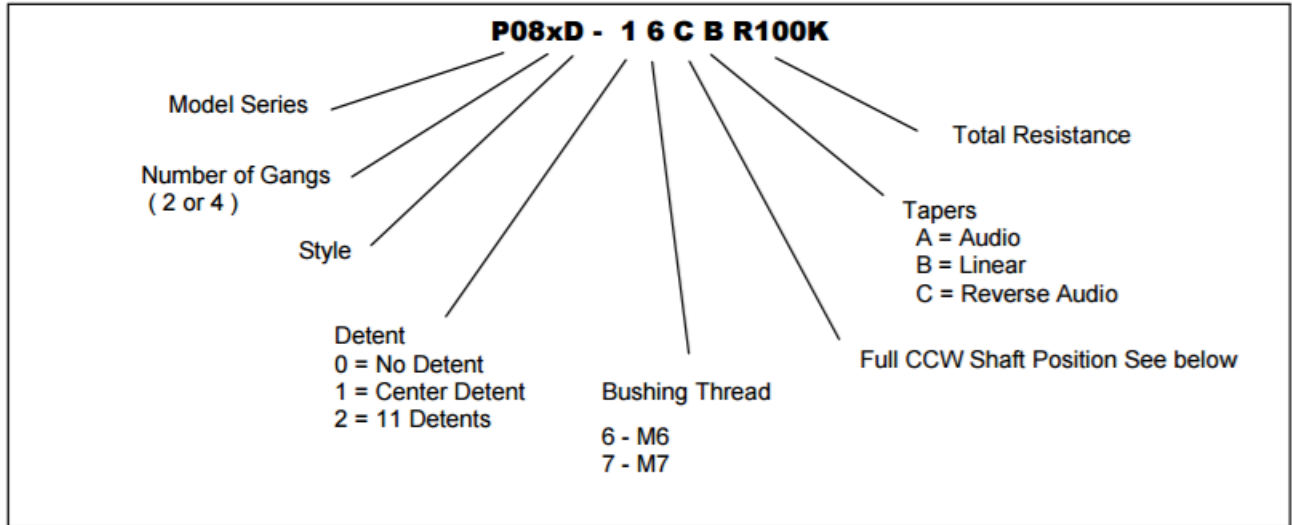

P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE


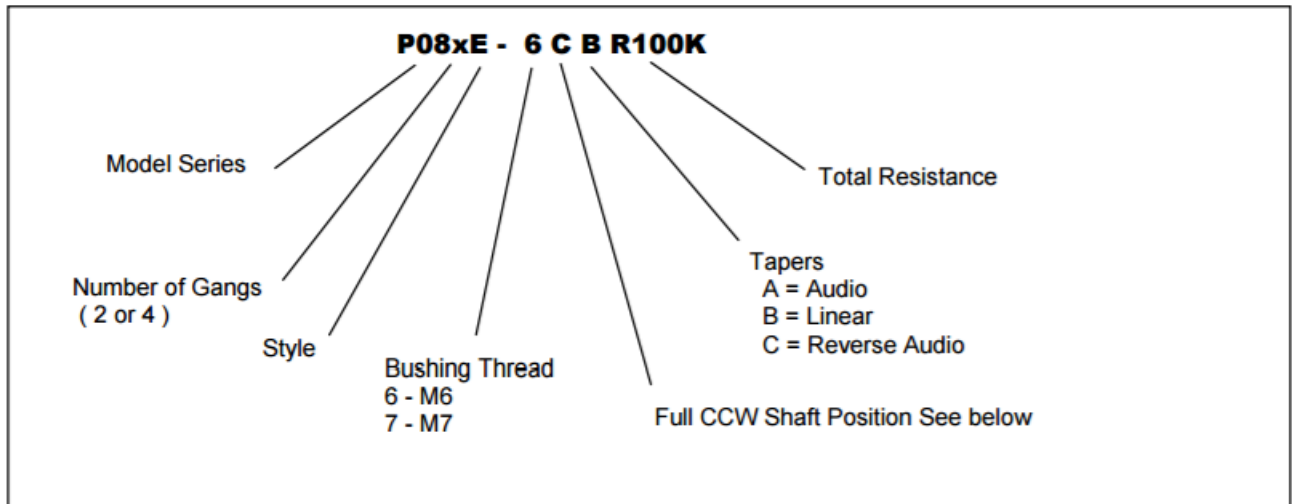


Panel Potentiometer

Model P08x Series




Shaft Length "L" Code – For Models P08xN and P08xS only

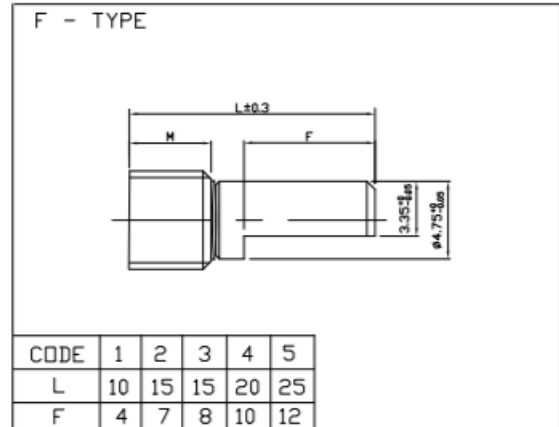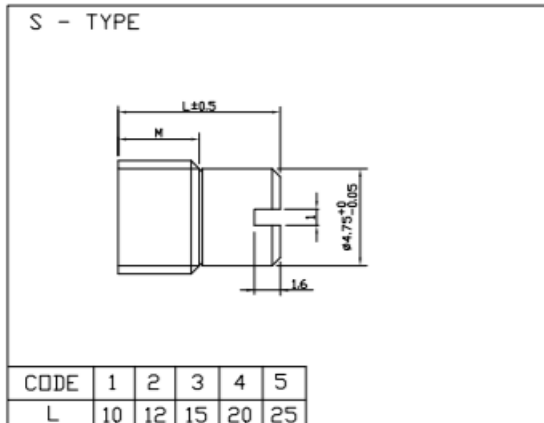

Shaft Position (F-Type Shaft)

Dashed lines on Type "C" and Type "A" shows position of adjustment slot for S-Type

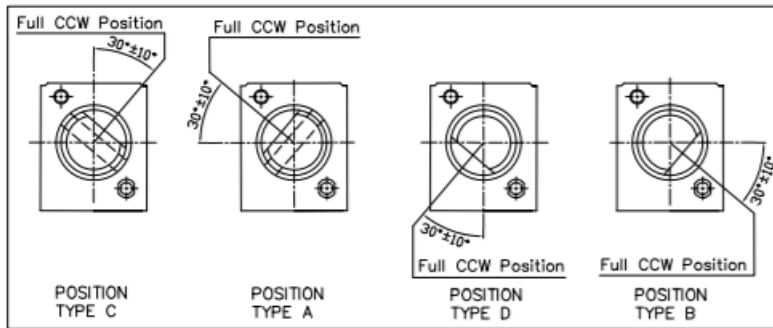

STANDARD RESISTANCE VALUES, OHMS

500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG
-----	----	----	----	-----	-----	-----	------	------	------	------






Panel Potentiometer

Model P08x Series








P08xN - POTENTIOMETER MODULE

NUMBER OF GANGS	1	2	3	4
X	5	7	9	11

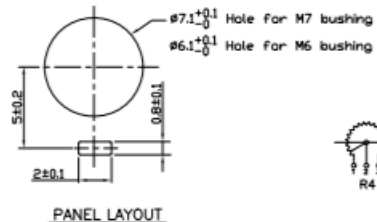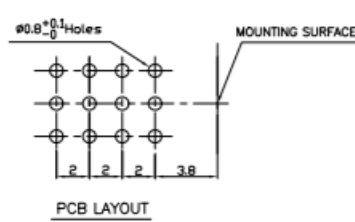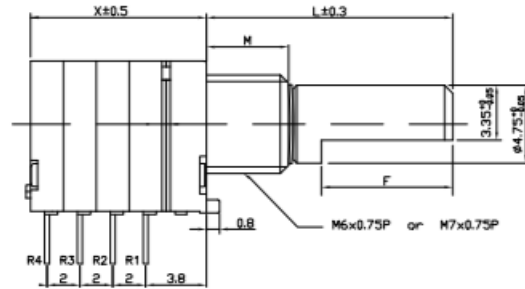

P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

NUMBER OF GANGS	1	2	3	4
X	10	12	14	16

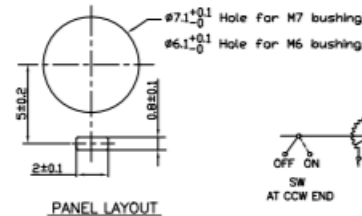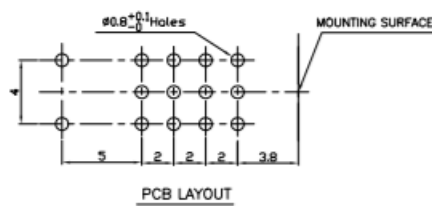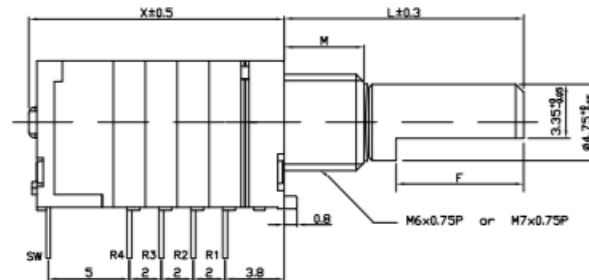


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
 Ph: +1 714 447 2345
 www.ttelectronics.com/bi-technologies

P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

2 GANG

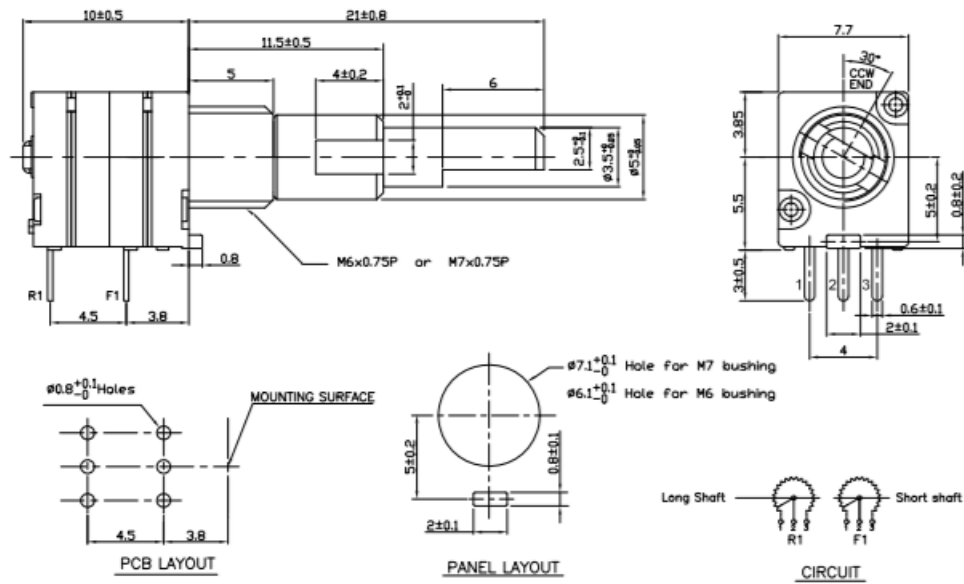

4 GANG

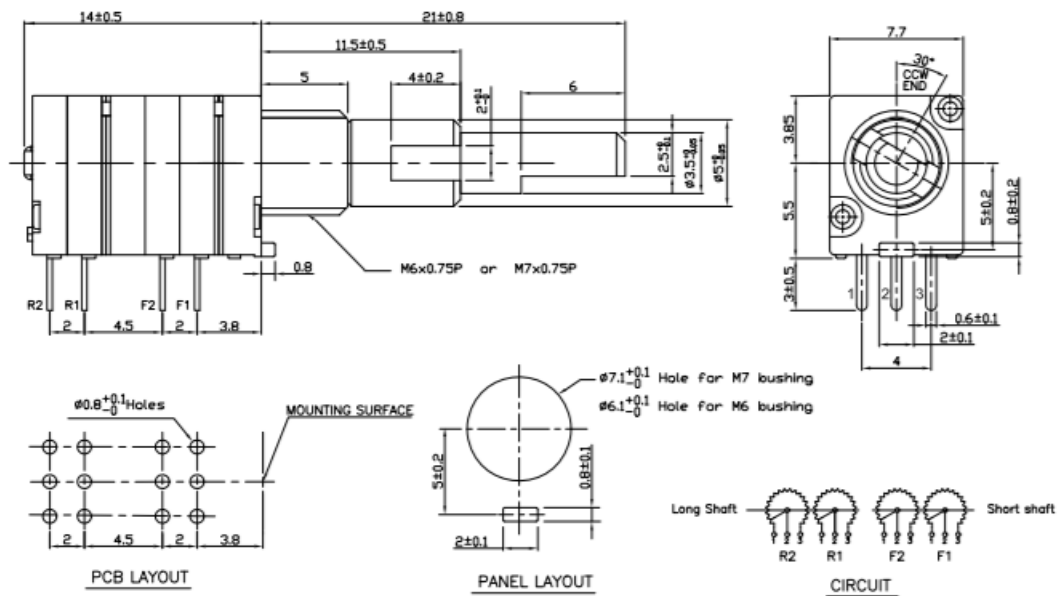


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
 Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE

2 GANG

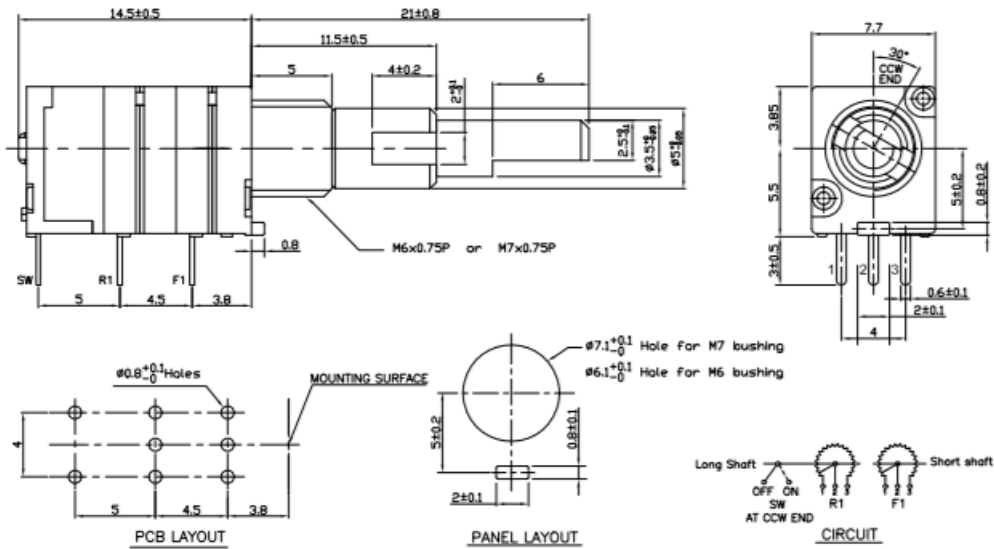

4 GANG

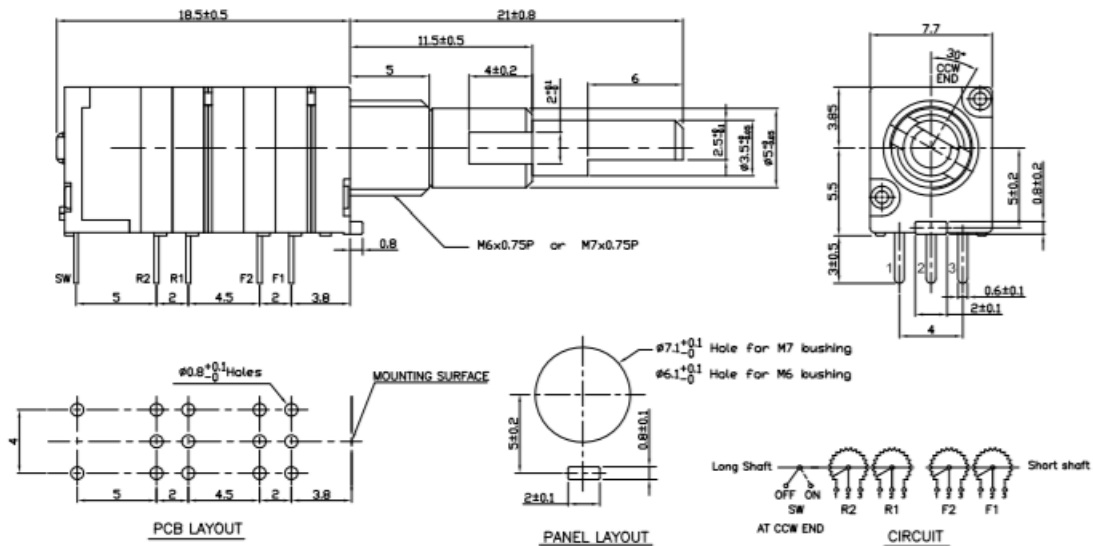


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
 Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Panel Potentiometer

Model P08x Series

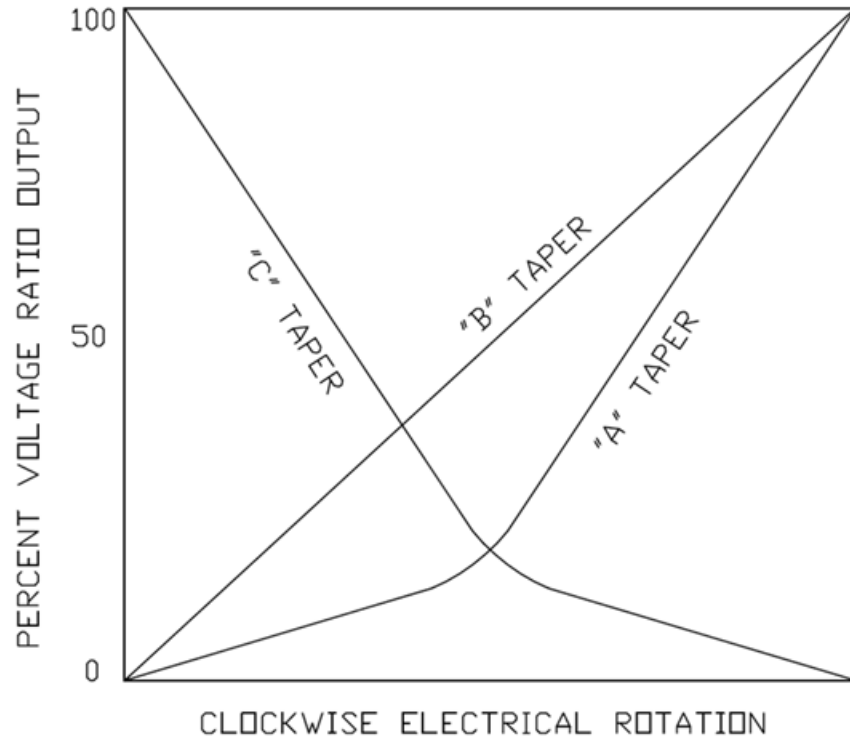

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Issue B 04/2019 Page 8