
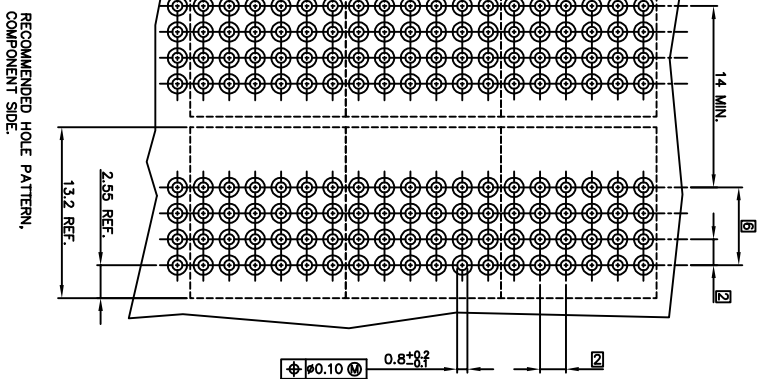
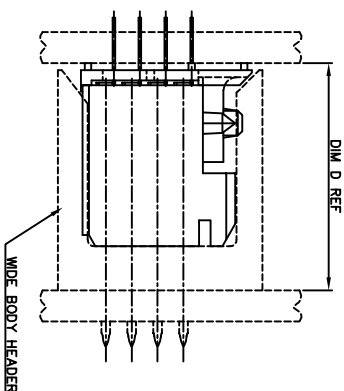
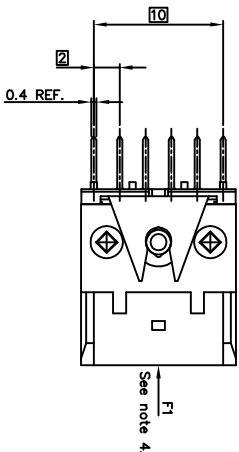



PRODUCT NR.
85922-XYZ

PLATING CONTACT AREA:
DASH NR.: PERFORMANCE LEVEL
-YY/YYLF TELORDIA CO
-YY/YYLF CUSTOMER SPECIAL
-YY/YYLF CUSTOMER SPECIAL

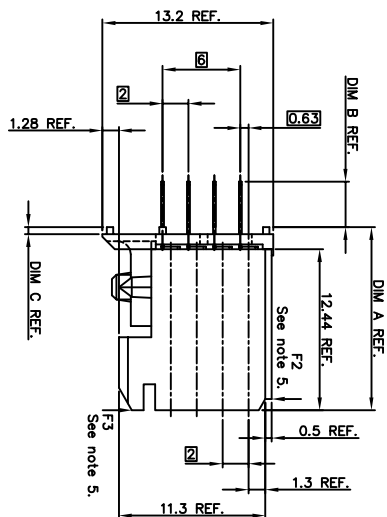

DASH NR	CONFIGURATION		PCB THICKN.	DIM A	DIM B	DIM C	DIM D
	ROW #	COLUMN #					
-X01	D	6 5 4 3 2 1	2.4	14.14	3.50	0.54	17.64
	C	+					
	B	+					
-X01LF	A	+	3.2	13.60	4.04	0.00	17.10
	C	+					
	B	+					
-X02	D	+	2.4	13.60	3.24	0.00	17.10
	C	+					
	B	+					
-X02LF	A	+	1.6	14.14	2.70	0.54	17.64
	C	+					
	B	+					
-X03	D	+	1.6	14.64	3.00	0.54	18.14
	C	+					
	B	+					
-X03LF	A	+	1.6	15.14	2.50	0.54	18.64
	C	+					
	B	+					
-X04	D	+	2.4	14.14	3.50	0.54	17.64
	C	+					
	B	+					
-X04LF	A	+	3.2	13.60	4.04	0.00	17.10
	C	+					
	B	+					
-X05	D	+	1.6	14.14	2.70	0.54	17.64
	C	+					
	B	+					
-X05LF	A	+	1.6	14.64	3.00	0.54	18.14
	C	+					
	B	+					
-X06	D	+	1.6	15.14	2.50	0.54	18.64
	C	+					
	B	+					
-X06LF	A	+	2.4	14.14	3.50	0.54	17.64
	C	+					
	B	+					
-X07	D	+	2.4	14.14	3.50	0.54	17.64
	C	+					
	B	+					
-X07LF	A	+	3.2	13.60	4.04	0.00	17.10
	C	+					
	B	+					
-X20	D	+	2.4	14.14	3.50	0.54	17.64
	C	+					
	B	+					
-X20LF	A	+	3.2	13.60	4.04	0.00	17.10
	C	+					
	B	+					

"-" POSITION NOT LOADED
"+" POSITION LOADED

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING MATERIALS 2-8 μm snpb 90-97 OR 2-8 μm PURE FOR LF.
- LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
- LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
- PRODUCT MARKING: PARTNUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

REV'T. CODE	DATE	DESCRIPTION	BY
1	05/19/2011	INITIAL RELEASE	STR
2	05/19/2011	REVISION	STR
3	05/19/2011	REVISION	STR
4	05/19/2011	REVISION	STR
5	05/19/2011	REVISION	STR
6	05/19/2011	REVISION	STR
7	05/19/2011	REVISION	STR
8	05/19/2011	REVISION	STR
9	05/19/2011	REVISION	STR
10	05/19/2011	REVISION	STR