
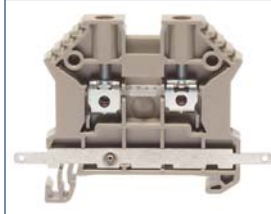
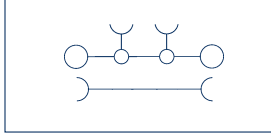


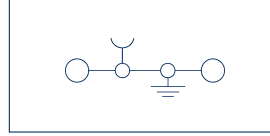


SRK Feed-Through Terminal | SSL Protective Earth Terminal



SRK 4/2A	SRK 4/2A SAS	SSL 4/2A		
				
				
Feed-through terminal 2 connections	Feed-through terminal, 2 connections with shield connection rail	PE terminal 2 connections		
Screw connection 48 x 6 x 47	Screw connection 62.5 x 6 x 47	Screw connection 48 x 6 x 47		
Qty.	Qty.	Qty.		
SRK 4/2A beige 17104.2 100	SRK 4/2A SAS beige 17116.2 100	SSL 4/2A 17107.2 100		
SRK 4/2A blue 17104.5 100	SRK 4/2A SAS blue 17116.5 100			
				
IEC* 1000 32	IEC* 400 32	IEC*		
CSAus* 600 40	CSAus*	CSAus*		
CSA* 600 40				
4 22-11	4 22-11	4 22-11		
8 3	8 3	8 3		
A4 V0	A4 V0	A4 V0		
0.2-6 -	0.2-6 -	0.2-6 -		
0.2-6 0.2-4	0.2-6 0.2-4	0.2-6 0.2-4		
0.2-6	0.2-6	0.2-6		
12	12	12		
0.5-1.0 Slotted M 3	0.5-1.0 Slotted M 3	0.5 - 1.0 Slotted M 3		
PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C		
2 1	2 1	1 1		
Qty.	Qty.	Qty.		
AP 2.5-10 beige 2001.2 50	AP 2.5-10 beige 2001.2 50	AP 2.5-10 beige 2001.2 50		
TW 2.5-10 beige 2002.2 50	TW 2.5-10 beige 2002.2 50	TW 2.5-10 beige 2002.2 50		
SQIK 2.5-10 yellow 17200.8 20	SQIK 2.5-10 yellow 17200.8 50	SQIK 2.5-10 yellow 17200.8 50		
SQI 4/2 yellow 17211.8 50	SQI 4/2 yellow 17211.8 50	SQI 4/2 yellow 17211.8 50		
SQI 4/3 yellow 17212.8 50	SQI 4/3 yellow 17212.8 20	SQI 4/3 yellow 17212.8 20		
SQI 4/4 yellow 17213.8 20	SQI 4/4 yellow 17213.8 20	SQI 4/4 yellow 17213.8 20		
SQI 4/5 yellow 17214.8 20	SQI 4/5 yellow 17214.8 20	SQI 4/5 yellow 17214.8 20		
SQI 4/6 yellow 17215.8 20	SQI 4/6 yellow 17215.8 20	SQI 4/6 yellow 17215.8 20		
SQI 4/7 yellow 17216.8 20	SQI 4/7 yellow 17216.8 10	SQI 4/7 yellow 17216.8 10		
SQI 4/8 yellow 17217.8 10	SQI 4/8 yellow 17217.8 10	SQI 4/8 yellow 17217.8 10		
SQI 4/9 yellow 17218.8 10	SQI 4/9 yellow 17218.8 10	SQI 4/9 yellow 17218.8 10		
SQI 4/10 yellow 17219.8 10	SQI 4/10 yellow 17219.8 10	SQI 4/10 yellow 17219.8 10		
SQI 4/30 yellow 17220.8 5	SQI 4/30 yellow 17220.8 5	SQI 4/30 yellow 17220.8 5		
ES 35/K/ST 2828.0 50	ES 35/K/ST 2828.0 50	ES 35/K/ST 2828.0 50		
TA 6/1-ST 2813.0 10	TA 6/1-ST 2813.0 10			
SDB 0.6x3.5 1086.0 1	SDB 0.6x3.5 1086.0 1	SDB 0.6x3.5 1086.0 1		
PMC SB 6/50 4702.7 500	PMC SB 6/50 4702.7 500	PMC SB 6/50 4702.7 500		

SRK Feed-Through Terminal | SSL Protective Earth Terminal


Screw connection system



- Foot base can be snapped on TS 35 mounting rail
- Housing made from Polyamide 6.6 V0



Connection diagram

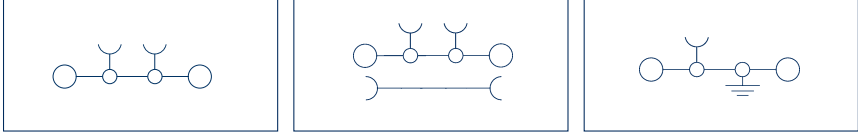

Feed-through terminal
2 connections

Feed-through terminal, 2 connections with shield connection rail

PE terminal
2 connections

Connection type
Size (L x W x H), mm with TS 35 x 7.5 mm
Type
Type Color
Cat. no.
Type Color
Cat. no.
Type Color
Cat. no.
Type Color
Cat. no.

Screw connection	Qty.
48 x 8 x 47	
SRK 6/2A beige	100
Cat. no.	17108.2
SRK 6/2A blue	100
Cat. no.	17108.5

Screw connection	Qty.
62.5 x 8 x 47	
SRK 6/2A SAS beige	100
Cat. no.	17117.2
SRK 6/2A SAS blue	100
Cat. no.	17117.5

Screw connection	Qty.
48 x 8 x 47	
SSL 6/2A	100
Cat. no.	17111.2

Colors available

② ⑤ ③ ① ④ ⑥ ⑦ ⑧ ⑨

② ⑤ ③ ① ④ ⑥ ⑦ ⑧ ⑨

② ⑤ ③ ① ④ ⑥ ⑦ ⑧ ⑨

Ratings
Rated voltage, V
Rated current, A
Rated conductor cross-section, mm ² AWG
Rated impulse voltage, kV Pollution degree
Plug gauge acc. to EN 60 947-1 Flamm. class acc. to UL 94

IEC*	CSAus*	CSA*
1000	600	600
57	65	55
10 22-8		
6 3		
A5 V0		

IEC*	
320	
57	
10 22-8	
6 3	
A5 V0	

IEC*	CSAus*	CSA*
10 22-8		
6 3		
A5 V0		

Connection data
Single wire (solid) stranded (flexible) mm ²
Flexible Flexible (w/ferrules acc. to DIN 46 228/1) mm ²
Contact wire range, mm ²
Stripping length, mm
Torque, Nm Screw
Special connection

0.2-10 0.2-10
0.2-10 0.2-10
0.2-10
12
1.2 - 2.0 Slotted M 4

0.2-10 0.2-10
0.2-10 0.2-10
0.2-10
12
1.2 - 2.0 Slotted M 4

0.2-10 0.2-10
0.2-10 0.2-10
0.2-10
12
1.2 - 2.0 Slotted M 4

Features
Material of insulated housing Temperature range
Number of cross-connection channels Test pick-off

PA 6.6 -40 to +120°C
2 1

PA 6.6 -40 to +120°C
2 1

PA 6.6 -40 to +120°C
1 1

Accessories	Qty.
End plate AP	
Cat. no.	50
Partition plate TW	
Cat. no.	50
Insulating cap SQIK for cross-connector	
Cat. no.	20
Insulated cross-connection SQI	
Cat. no.	50
Insulated cross-connection SQI	
Cat. no.	50
Insulated cross-connection SQI	
Cat. no.	20
Insulated cross-connection SQI	
Cat. no.	20
Insulated cross-connection SQI	
Cat. no.	20
Insulated cross-connection SQI	
Cat. no.	10
Insulated cross-connection SQI	
Cat. no.	10
Insulated cross-connection SQI	
Cat. no.	10
Insulated cross-connection SQI	
Cat. no.	5
End bracket ES	
Cat. no.	50
Test adapter TA	
Cat. no.	10
Screwdriver SDB	
Cat. no.	1
Quick marking PMC SB	
Cat. no.	400

AP 2.5-10 beige	
Cat. no.	50
TW 2.5-10 beige	
Cat. no.	50
SQIK 2.5-10 yellow	
Cat. no.	20
SQI 6/2 yellow	
Cat. no.	50
SQI 6/3 yellow	
Cat. no.	50
SQI 6/4 yellow	
Cat. no.	20
SQI 6/5 yellow	
Cat. no.	20
SQI 6/6 yellow	
Cat. no.	20
SQI 6/7 yellow	
Cat. no.	20
SQI 6/8 yellow	
Cat. no.	10
SQI 6/9 yellow	
Cat. no.	10
SQI 6/10 yellow	
Cat. no.	10
SQI 6/30 yellow	
Cat. no.	5
ES 35/K/ST	
Cat. no.	50
TA 8/1-ST	
Cat. no.	10
SDB 0.8x4.0	
Cat. no.	1
PMC SB 8/40	
Cat. no.	400




AP 2.5-10 beige	
Cat. no.	50
TW 2.5-10 beige	
Cat. no.	50
SQIK 2.5-10 yellow	
Cat. no.	20
SQI 6/2 yellow	
Cat. no.	50
SQI 6/3 yellow	
Cat. no.	50
SQI 6/4 yellow	
Cat. no.	20
SQI 6/5 yellow	
Cat. no.	20
SQI 6/6 yellow	
Cat. no.	20
SQI 6/7 yellow	
Cat. no.	20
SQI 6/8 yellow	
Cat. no.	10
SQI 6/9 yellow	
Cat. no.	10
SQI 6/10 yellow	
Cat. no.	10
SQI 6/30 yellow	
Cat. no.	5
ES 35/K/ST	
Cat. no.	50
TA 8/1-ST	
Cat. no.	10
SDB 0.8x4.0	
Cat. no.	1
PMC SB 8/40	
Cat. no.	400

AP 2.5-10 green	
Cat. no.	50
TW 2.5-10 beige	
Cat. no.	50
SQIK 2.5-10 yellow	
Cat. no.	20
SQI 6/2 yellow	
Cat. no.	50
SQI 6/3 yellow	
Cat. no.	50
SQI 6/4 yellow	
Cat. no.	20
SQI 6/5 yellow	
Cat. no.	20
SQI 6/6 yellow	
Cat. no.	20
SQI 6/7 yellow	
Cat. no.	20
SQI 6/8 yellow	
Cat. no.	10
SQI 6/9 yellow	
Cat. no.	10
SQI 6/10 yellow	
Cat. no.	10
SQI 6/30 yellow	
Cat. no.	5
ES 35/K/ST	
Cat. no.	50
SDB 0.8x4.0	
Cat. no.	1
PMC SB 8/40	
Cat. no.	400

You can find more accessories (marking systems, covers, end brackets, etc.) in our CONTA-CONNECT catalog in the Accessories section or on the Internet at www.conta-clip.com.

*Approval applied for! The complete product line will be deliverable starting in the third quarter of 2009.

SRK Feed-Through Terminal | SSL Protective Earth Terminal

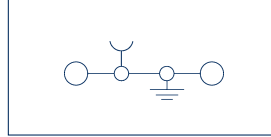SRK 10/2A	SRK 10/2A SAS	SSL 10/2A		
				
				
Feed-through terminal 2 connections	Feed-through terminal, 2 connections with shield connection rail	PE terminal 2 connections		
Screw connection 48 x 10 x 47	Screw connection 62.5 x 10 x 47	Screw connection 48 x 10 x 47		
Qty.	Qty.	Qty.		
SRK 10/2A beige 17112.2 100	SRK 10/2A SAS beige 17118.2 100	SSL 10/2A 17115.2 100		
SRK 10/2A blue 17112.5 100	SRK 10/2A SAS blue 17118.5 100			
				
IEC* CSAus* CSA*	IEC*	IEC* CSAus* CSA*		
1000 600 600	250			
76 65 85	76			
16 10-6	16 10-6	16 10-6		
8 3	8 3	8 3		
B7 V2	B7 V2	B7 V2		
0.2-16 0.2-16	0.2-16 0.2-16	2.5-25 2.5-25		
0.2-16 0.2-16	0.2-16 0.2-16	2.5-16 2.5-16		
0.6-16	0.6-16	0.6-16		
15	15	15		
2.0-4.0 Slotted M 5	2.0-4.0 Slotted M 5	2.0-4.0 Slotted M 5		
PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C		
2 1	2 1	1 1		
Qty.	Qty.	Qty.		
AP 2.5-10 beige 2001.2 50	AP 2.5-10 beige 2001.2 50	AP 2.5-10 green 2001.1 50		
TW 2.5-10 beige 2002.2 50	TW 2.5-10 beige 2002.2 50	TW 2.5-10 beige 2002.2 50		
SQIK 2.5-10 yellow 17200.8 20	SQIK 2.5-10 yellow 17200.8 50	SQIK 2.5-10 yellow 17200.8 50		
SQI 10/2 yellow 17231.8 50	SQI 10/2 yellow 17231.8 50	SQI 10/2 yellow 17231.8 50		
SQI 10/3 yellow 17232.8 50	SQI 10/3 yellow 17232.8 20	SQI 10/3 yellow 17232.8 20		
SQI 10/4 yellow 17233.8 20	SQI 10/4 yellow 17233.8 20	SQI 10/4 yellow 17233.8 20		
SQI 10/5 yellow 17234.8 20	SQI 10/5 yellow 17234.8 20	SQI 10/5 yellow 17234.8 20		
SQI 10/6 yellow 17235.8 20	SQI 10/6 yellow 17235.8 20	SQI 10/6 yellow 17235.8 20		
SQI 10/7 yellow 17236.8 20	SQI 10/7 yellow 17236.8 10	SQI 10/7 yellow 17236.8 10		
SQI 10/8 yellow 17237.8 10	SQI 10/8 yellow 17237.8 10	SQI 10/8 yellow 17237.8 10		
SQI 10/9 yellow 17238.8 10	SQI 10/9 yellow 17238.8 10	SQI 10/9 yellow 17238.8 10		
SQI 10/10 yellow 17239.8 10	SQI 10/10 yellow 17239.8 10	SQI 10/10 yellow 17239.8 10		
SQI 10/30 yellow 17240.8 5	SQI 10/30 yellow 17240.8 5	SQI 10/30 yellow 17240.8 5		
ES 35/K/ST 2828.0 50	ES 35/K/ST 2828.0 50	ES 35/K/ST 2828.0 50		
SDB 0.8x4.0 1087.0 1	SDB 0.8x4.0 1087.0 1	SDB 0.8x4.0 1087.0 1		
PMC SB 5/50 4600.7 500	PMC SB 5/50 4600.7 500	PMC SB 5/50 4600.7 500		