# **74ABT245**

# Octal transceiver with direction pin; 3-State Rev. 4 — 6 October 2017

**Product data sheet** 

### **General description**

The 74ABT245 high-performance BiCMOS device combines low static and dynamic power dissipation with high speed and high output drive.

The 74ABT245 is an octal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. The control function implementation minimizes external timing requirements. The device features an output enable (OE) input for easy cascading and a direction (DIR) input for direction control.

### Features and benefits

- · Octal bidirectional bus interface
- · 3-State buffers
- Output capability: +64 mA/–32 mA
- Power-up 3-State
- · Live insertion/extraction permitted
- Inputs are disabled during 3-state mode
- Latch-up protection exceeds 500 mA per JESD78 class II level A
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
- Specified from -40 °C to +85 °C

## **Ordering information**


Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74ABT245D	-40 °C to +85 °C	SO20	plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1
74ABT245DB	-40 °C to +85 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1
74ABT245PW	-40 °C to +85 °C	TSSOP20	plastic thin shrink small outline package; 20 leads; body width 4.4 mm	SOT360-1



Octal transceiver with direction pin; 3-State


# 4 Functional diagram

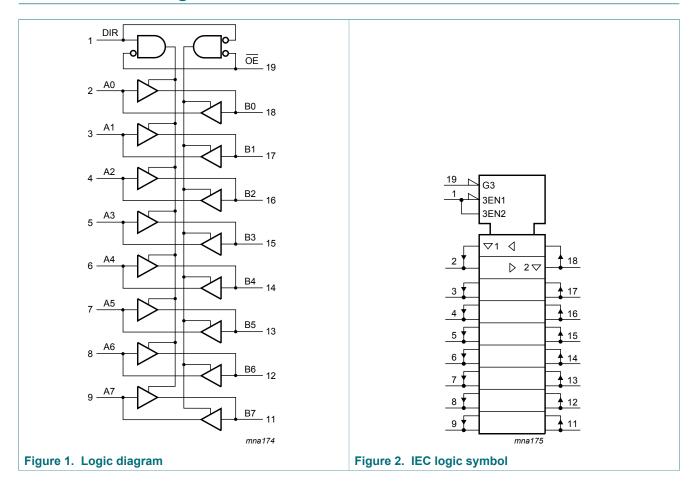

Octal transceiver with direction pin; 3-State

# 5 Pinning information

### 5.1 Pinning

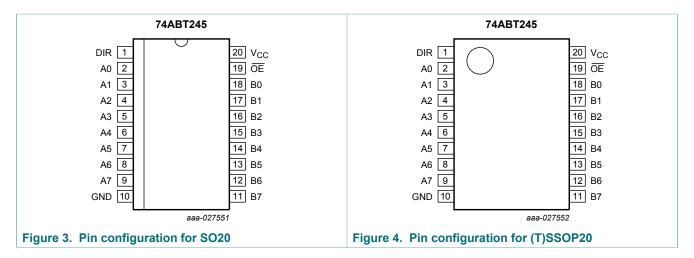

### 5.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
DIR	1	direction control input
A0, A1, A2, A3, A4, A5, A6, A7	2, 3, 4, 5, 6, 7, 8, 9	data input/output
GND	10	ground (0 V)
B0, B1, B2, B3, B4, B5, B6, B7	18, 17, 16, 15, 14, 13, 12, 11	data input/output
ŌE	19	output enable input (active LOW)
V <sub>CC</sub>	20	supply voltage

Octal transceiver with direction pin; 3-State

### **Functional description**

Table 3. Function table [1]

Input		Input/output			
ŌE DIR		An	Bn		
L	L	output An = Bn	input		
L	Н	input	output Bn = An		
Н	X	Z	Z		

<sup>[1]</sup> H = HIGH voltage level;

#### **Limiting values** 7

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+7.0	V
VI	input voltage	[1	-1.2	+7.0	V
Vo	output voltage	output in OFF-state or HIGH-state	-0.5	+5.5	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < 0 V	-18	-	mA
I <sub>OK</sub>	output clamping current	V <sub>O</sub> < 0 V	-50	-	mA
Io	output current	output in LOW-state	-	128	mA
Tj	junction temperature	[2	_	150	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

#### **Recommended operating conditions** 8

#### Table 5. Operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage		4.5	-	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	V
I <sub>OH</sub>	HIGH-level output current		-	-	-32	mA
I <sub>OL</sub>	LOW-level output current		-	-	64	mA
Δt/ΔV	input transition rise and fall rate		0	-	5	ns/V
T <sub>amb</sub>	ambient temperature	in free air	-40	-	+85	°C

L = LOW voltage level;

X = don't care;

Z = high-impedance OFF-state.

 <sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 [2] The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150 °C.

Octal transceiver with direction pin; 3-State

### 9 Static characteristics

### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Т	T <sub>amb</sub> = 25 °C			T <sub>amb</sub> = -45 °C to +85 °C	
			Min	Тур	Max	Min	Max	
V <sub>IK</sub>	input clamping voltage	V <sub>CC</sub> = 4.5 V; I <sub>IK</sub> = -18 mA	-1.2	-0.9	-	-1.2	-	V
V <sub>IH</sub>	HIGH-level input voltage		2.0	-	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage		-	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{CC}$ = 4.5 V; $V_I$ = $V_{IL}$ or $V_{IH}$						
	output voltage	I <sub>OH</sub> = -3 mA	2.5	2.9	-	2.5	-	V
		I <sub>OH</sub> = -32 mA	2.0	2.4	-	2.0	-	V
		$V_{CC}$ = 5.0 V; $V_I$ = $V_{IL}$ or $V_{IH}$						
		I <sub>OH</sub> = -3 mA	3.0	3.4	-	3.0	-	V
$V_{OL}$	LOW-level output voltage	$V_{CC} = 4.5 \text{ V}; V_{I} = V_{IL} \text{ or } V_{IH};$ $I_{OL} = 64 \text{ mA}$	-	0.42	0.55	-	0.55	V
I <sub>I</sub>	input leakage current	Control pins; $V_{CC} = 5.5 \text{ V}; V_I = \text{GND or } 5.5 \text{ V}$	-	±0.01	±1.0	-	±1.0	μA
		Data pins; $V_{CC} = 5.5 \text{ V}$ ; $V_I = \text{GND or } 5.5 \text{ V}$	-	±5	±100	-	±100	μA
l <sub>OFF</sub>	power-off leakage current	$V_{CC} = 0 \text{ V}; V_O \text{ or } V_I \le 4.5 \text{ V}$	-	±5.0	±100	-	±100	μA
I <sub>O(pu/pd)</sub>	power-up/ power-down output current	$V_{CC}$ = 2.0 V; $V_{O}$ = 0.5 V; $V_{I}$ = GND or $V_{CC}$ ; $\overline{OE}$ = don't care	-	±5.0	±50	-	±50	μA
I <sub>OZ</sub>	OFF-state	$V_{CC} = 5.5 \text{ V}; V_I = V_{IL} \text{ or } V_{IH}$						
	output current	output HIGH-state at V <sub>O</sub> = 2.7 V	-	5.0	50	-	50	μΑ
		output LOW-state at $V_O = 0.5 \text{ V}$	-	-5.0	-50	-	-50	μΑ
I <sub>CEX</sub>	output high leakage current	$V_{CC} = 5.5 \text{ V}; V_{O} = 5.5 \text{ V};$ $V_{I} = \text{GND or } V_{CC}$	-	5.0	50	-	50	μA
Io	output current	$V_{CC} = 5.5 \text{ V}; V_O = 2.5 \text{ V}$ [2]	-40	-100	-180	-40	-180	mA
I <sub>CC</sub>	supply current	$V_{CC}$ = 5.5 V; $V_I$ = GND or $V_{CC}$						
		outputs HIGH-state	-	50	250	-	250	μΑ
		outputs LOW-state	-	24	30	-	30	mA
		outputs disabled	-	50	250	-	250	μA

### Octal transceiver with direction pin; 3-State

Symbol	Parameter	rameter Conditions		T <sub>amb</sub> = 25 °C			T <sub>an</sub> -45 °C t	Unit	
				Min	Тур	Max	Min	Max	
$\Delta I_{CC}$	additional supply	per input pin; V <sub>CC</sub> = 5.5 V							
current	outputs enabled; $$^{[3]}$$ one input at 3.4 V and other inputs at $V_{CC}$ or GND	3]	-	0.5	1.5	-	1.5	mA	
		outputs disabled; $$^{[3]}$$ one data input at 3.4 V and other inputs at $V_{CC}$ or GND	3]	-	50	250	-	250	μΑ
		outputs disabled; $$^{[3]}$$ one enable input at 3.4 V and other inputs at $V_{CC}$ or GND	3]	-	0.5	1.5	-	1.5	mA
Cı	input capacitance	DIR; $\overline{OE}$ ; $V_I = 0 \text{ V or } V_{CC}$		-	4	-	-	-	pF
C <sub>I/O</sub>	input/output capacitance	outputs disabled; $V_O = 0 \text{ V or } V_{CC}$		-	7	-	-	-	pF

<sup>[1]</sup> This parameter is valid for any  $V_{\text{CC}}$  between 0 V and 2.1 V, with a transition time of up to 10 ms. From  $V_{CC}$  = 2.1 V to  $V_{CC}$  = 5 V  $\pm$  10 % a transition time of up to 100  $\mu s$  is permitted.

# 10 Dynamic characteristics

**Table 7. Dynamic characteristics** 


Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 7.

Symbol	Parameter	Conditions	T <sub>amb</sub> =	$T_{amb} = 25  ^{\circ}C;  V_{CC} = 5.0  V$			$T_{amb}$ = -40 °C to 85 °C; $V_{CC}$ = 5.0 V ± 0.5 V		
			Min	Тур	Max	Min	Max		
t <sub>PLH</sub>	LOW to HIGH propagation delay	An to Bn or Bn to An; see Figure 5	1.0	2.2	4.1	1.0	4.6	ns	
t <sub>PHL</sub>	HIGH to LOW propagation delay	An to Bn or Bn to An; see Figure 5	1.0	2.9	4.2	1.0	4.6	ns	
t <sub>PZH</sub>	OFF-state to HIGH propagation delay	OE to An or Bn; see Figure 6	1.3	3.0	4.8	1.3	5.3	ns	
t <sub>PZL</sub>	OFF-state to LOW propagation delay	OE to An or Bn; see Figure 6	2.3	4.0	5.8	2.3	6.3	ns	
t <sub>PHZ</sub>	HIGH to OFF-state propagation delay	OE to An or Bn; see Figure 6	1.0	4.7	6.2	1.0	7.2	ns	
t <sub>PLZ</sub>	LOW to OFF-state propagation delay	OE to An or Bn; see Figure 6	1.0	4.1	5.8	1.0	6.3	ns	

 <sup>[2]</sup> Not more than one output should be tested at a time, une time.
 [3] This is the increase in supply current for each input at 3.4 V. Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

Octal transceiver with direction pin; 3-State


### 10.1 Waveforms and test circuit

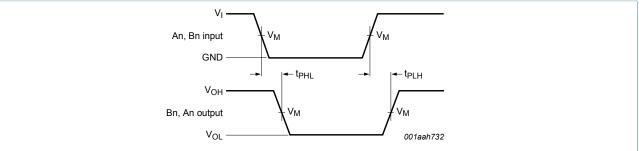

Measurement points are given in Table 8.

 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output drop that occur with the output load.

Figure 5. Input (An or Bn) to output (Bn or An) propagation delays

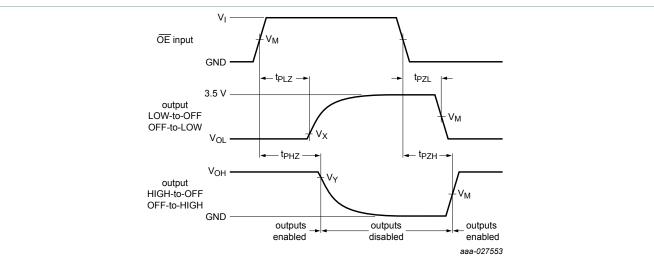

Measurement points are given in Table 8.


 $V_{OL}$  and  $V_{OH}$  are typical voltage output drop that occur with the output load.

Figure 6. 3-state output enable and disable propagation delays

**Table 8. Measurement points** 

Input	Output						
$V_{M}$	$v_{M}$ $v_{Y}$						
1.5 V	1.5 V	V <sub>OL</sub> + 0.3 V	V <sub>OH</sub> - 0.3 V				

### Octal transceiver with direction pin; 3-State

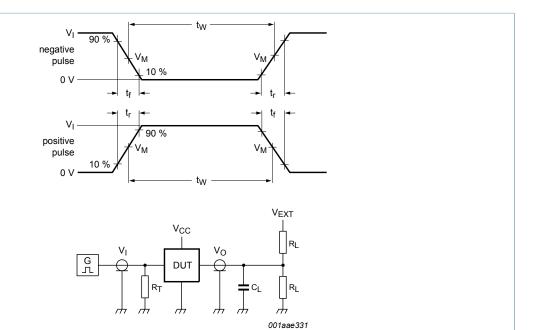

Test data is given in Table 9.

Definitions test circuit:

R<sub>L</sub> = Load resistance.

 $C_L$  = Load capacitance including jig and probe capacitance.

 $R_T$  = Termination resistance should be equal to output impedance  $Z_0$  of the pulse generator.

 $V_{EXT}$  = Test voltage for switching times.


Figure 7. Test circuit for measuring switching times

Table 9. Test data

Input			Load		V <sub>EXT</sub>			
$V_l \hspace{1cm} f_i \hspace{1cm} t_W \hspace{1cm} t_r, t_f$		CL	R <sub>L</sub>	t <sub>PHZ</sub> , t <sub>PZH</sub> t <sub>PLZ</sub> , t <sub>PZL</sub> t <sub>PLH</sub> , t <sub>PHL</sub>		t <sub>PLH</sub> , t <sub>PHL</sub>		
3.0 V	≤ 1 MHz	500 ns	≤ 2.5 ns	50 pF	500 Ω	open	7 V	open

Octal transceiver with direction pin; 3-State

# 11 Package outline

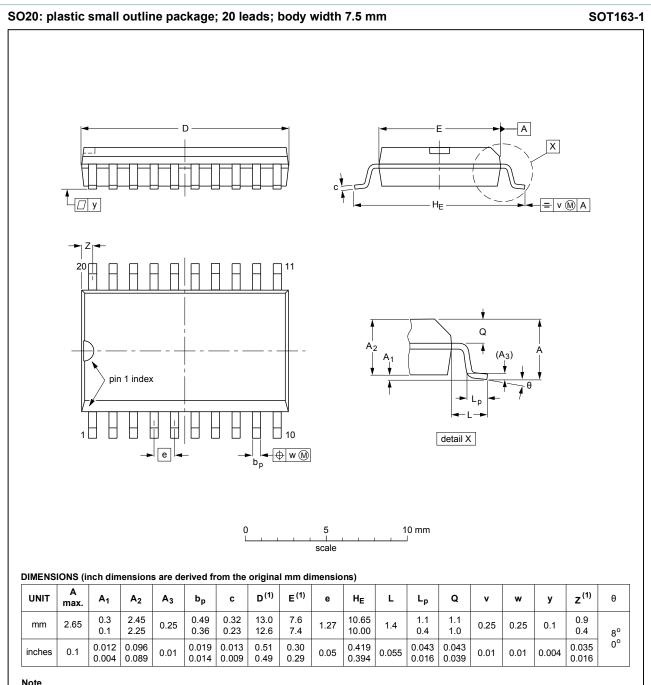

#### Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE VERSION		REFER	EUROPEAN	ICCUIT DATE		
	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT163-1	075E04	MS-013				<del>99-12-27</del> 03-02-19

Figure 8. Package outline SOT163-1 (SO20)

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Octal transceiver with direction pin; 3-State


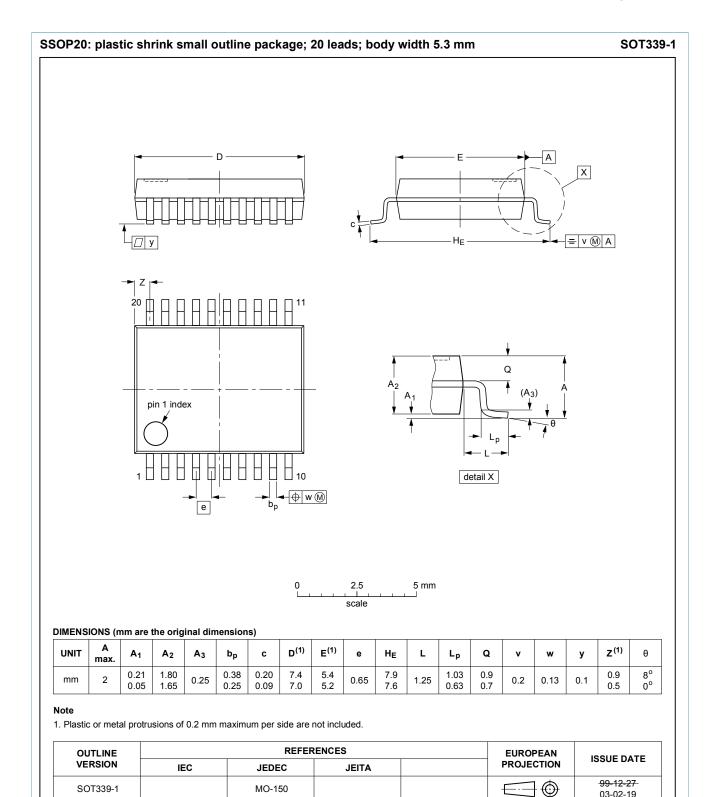


Figure 9. Package outline SOT339-1 (SSOP20)

03-02-19

Octal transceiver with direction pin; 3-State

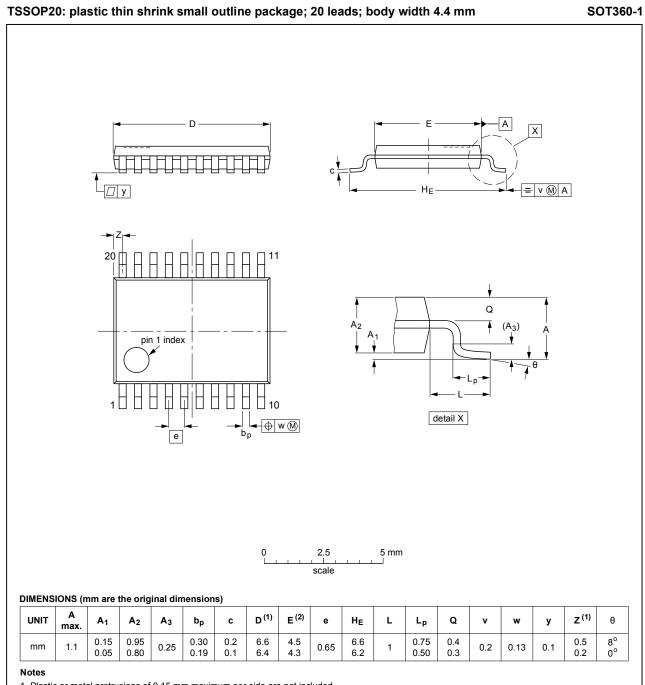

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT360-1		MO-153				<del>-99-12-27-</del> 03-02-19

Figure 10. Package outline SOT360-1 (TSSOP20)

Octal transceiver with direction pin; 3-State

### 12 Abbreviations

#### Table 10. Abbreviations

Acronym	Description
BiCMOS	Bipolar Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
MIL	Military
MM	Machine Model

# 13 Revision history

### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes	
74ABT245 v.4	20171006	Product data sheet	-	74ABT245 v.3	
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>				
74ABT245 v.3	20030206	Product data sheet	ECN 853-1447 29305	74ABT245 v.2	
Modifications:	Delete all references to N package. DIP20 package option discontinued.				
74ABT245 v.2	19980116	Product specification	ECN 853-1447 18867	74ABT245 v.1	
74ABT245 v.1	19960910	Product specification	-	-	

Octal transceiver with direction pin; 3-State

### 14 Legal information

#### 14.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions". [2] [3]
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 14.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 14.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

### Octal transceiver with direction pin; 3-State

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**Nexperia** 

# **74ABT245**

### Octal transceiver with direction pin; 3-State

### **Contents**

1	General description	1
2	Features and benefits	
3	Ordering information	1
4	Functional diagram	2
5	Pinning information	3
5.1	Pinning	3
5.2	Pin description	3
6	Functional description	
7	Limiting values	
3	Recommended operating conditions	4
9	Static characteristics	
10	Dynamic characteristics	6
10.1	Waveforms and test circuit	
11	Package outline	
12	Abbreviations	
13	Revision history	
14	Legal information	13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Nexperia:

74ABT245D,602 74ABT245DB,112 74ABT245DB,118 74ABT245D,623 74ABT245PW,112 74ABT245PW,118