



- Universal AC input I Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit I Over current I Over voltage I Overtemperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 I IP65 design for indoor or outdoor installations
- Three in one dimming function (1-10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry I damp I wet locations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires
- 7 years warranty (Note.10)





10. Refer to warranty statement

















File Name:HLG-185H-SPEC 2015-07-22

HLG-185H-12 A Blank: IP67 rated. Cable for IIO connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1-10Vdc or 10V PWM signal or potentiometer.


SPECIFICATION

MODEL			HLG-185H-12	HLG-185H-15	HLG-185H-20	HLG-185H-24	HLG-185H-30	HLG-185H-36	HLG-185H-42	HLG-185H-48	HLG-185H-54		
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V		
OUTPUT	CONSTANT CURRENT REGION Note.4		6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V		
	RATED CURRENT		13A	11.5A	9.3A	7.8A	6.2A	5.2A	4.4A	3.9A	3.45A		
	RATED POWER		156W	172.5W	186W	187.2W	186W	187.2W	184.8W	187.2W	186.3W		
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p		
	VOLTAGE ADJ. RANGE Note.6		10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V		
	CURRENT ADJ. RANGE		Can be adjuste	ed by internal po	i otentiometer A t	ype only							
			6.5 ~ 13A	5.75 ~ 11.5A	4.65 ~ 9.3A	3.9 ~ 7.8A	3.1 ~ 6.2A	2.6 ~ 5.2A	2.2 ~ 4.4A	1.95 ~ 3.9A	1.72 ~ 3.4!		
	VOLTAGE TOLERA	NCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	V	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	ON	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME	Note.8	1000ms,50ms	/115VAC 50	00ms,50ms/230	VAC at full loa	nd ; B type 1000	0ms,200ms/11!	5VAC 500m	s,200ms/230V <i>F</i>	AC at 95% lo		
	HOLD UP TIME (Typ.)		16ms at full loa	ad 230VAC /	115VAC								
	VOLTAGE RANGE	Note.5	90 ~ 305VAC 127 ~ 431VDC										
	FREQUENCY RAN	GE	47 ~ 63Hz										
	POWER FACTOR ((Typ.)	PF>0.98/115V	AC, PF>0.95/2	30VAC, PF>0.9	2/277VAC at 1	full load (Please	e refer to "Pow	er Factor Char	acteristic" curve)		
	TOTAL HARMONIC DISTORTION			nen output load							,		
	EFFICIENCY (Typ.))	91.5%	92%	93%	93.5%	93.5%	93.5%	94%	94%	94%		
INPUT	AC CURRENT	12V	1.8A / 115VA	0.8A / 2	30VAC 0.	7A / 277VAC					1		
	(Typ.)	15V ~ 54V	2.1A / 115VA	C 0.9A / 2	30VAC 0.	8A / 277VAC							
	INRUSH CURRENT (Typ.)		COLD START 65A(Ividih=445 \(\mu \) s measured at 50% lpeak) at 230VAC										
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT		<0.75mA / 277VAC										
	OUED OUDDENIE		95 ~ 108%										
	OVER CURRENT		Protection type: Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT		Constant current limiting, recovers automatically after fault condition is removed										
PROTECTION	OVER VOLTAGE		14 ~ 17V										
			Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery										
	OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.		-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDI	ITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP.,		-40 ~ +80 °C , 10 ~ 95% RH										
	TEMP. COEFFICIE		±0.03%/°C (0~50°C)										
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	VIBIOTION		UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved;										
	SAFETY STANDAR	RDS Note.7	design refer to UL60950-1, TUV EN60950-1										
SAFETY &	WITHSTAND VOLT	AGE											
EMC	ISOLATION RESIS		I/P-0/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH										
	EMC EMISSION	TANCL	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load); EN61000-3-3										
			Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A										
	EMC IMMUNITY					101347, EN33	uz4, ilgili illuus	ily level (surge	4KV), CITIEITA	А			
OTHERS	MTBF		192.2K hrs min. MIL-HDBK-217F (25°C)										
JINEKS	DIMENSION		228*68*38.8mm (L'W*H)										
NOTE	PACKING 1.15Kg: 12pcs/14.8Kg/0.8CUFT 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVING METHODS OF LED MODULE". 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. A type only. 7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. 8. Length of set up time is measured at cold first start. Turning ONIOFF the power supply may lead to increase of the set up time.												


11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.

9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.



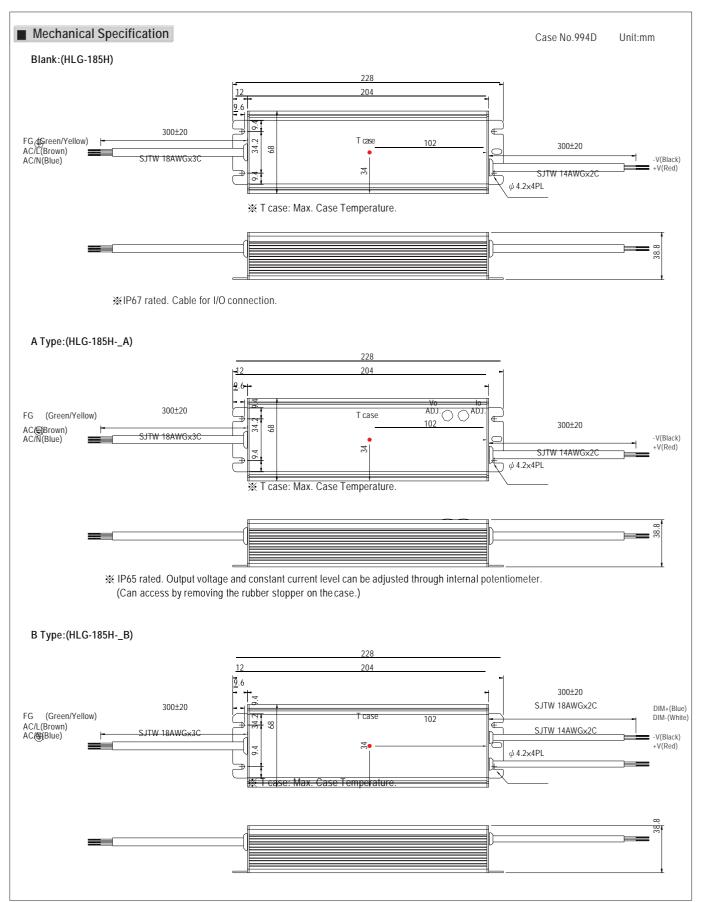




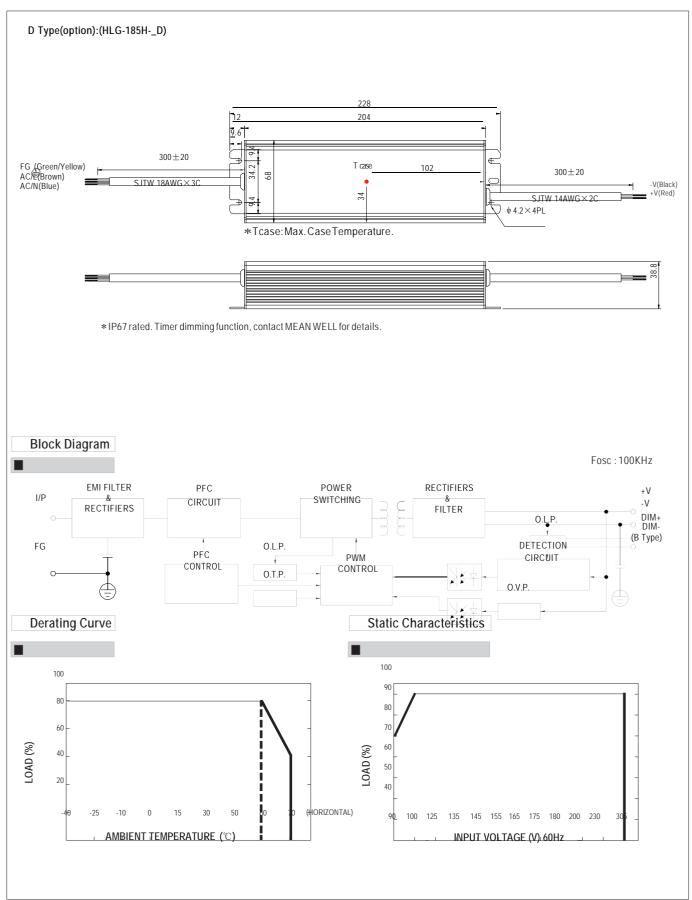




■ Power Factor Characteristic

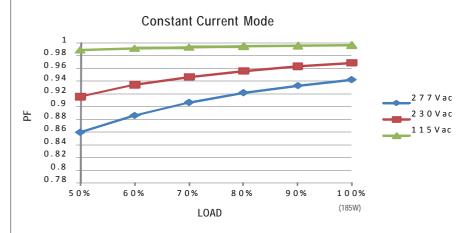

■ EFFICIENCY vs LOAD (48V Model)

HLG-185H series possess superior working efficiency that up to 94% can be reached in field applications.

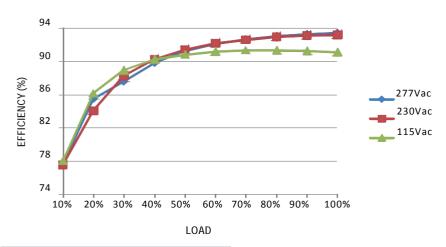


DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

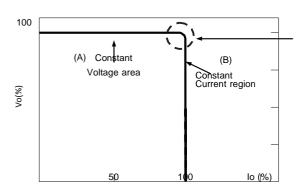

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems. $\frac{1}{2} \int_{-\infty}^{\infty} \frac{1}{2} \int_{-\infty}$

Should there be any compatibility issues, please contact MEANWELL.



■ DIMMING OPERATION (for B-type only)



- ★ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- → Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K Ω	OPEN
value	Multiple drivers (N=driverquantity for synchronized dimming operation)	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

*1~10V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


* 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- *Direct connecting to LEDs is suggested, but is not suitable for using additional

drivers. Dimming connection diagram for turning the lighting fixture ON/OFF:




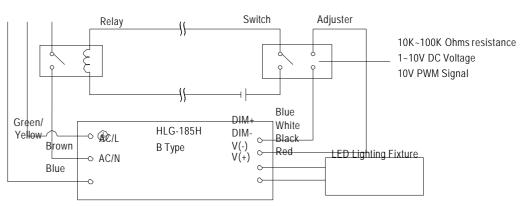

Using a switch and relay can turn ON/OFF the lighting fixture.

- $1. Output \ constant \ current \ level \ can \ be \ adjusted \ through \ output \ cable \ by \ connecting \ a \ resistance \ or \ 1 \sim 10V dc \ or \ 10V \ PWM \ signal \ between \ DIM+ \ and \ DIM-.$
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



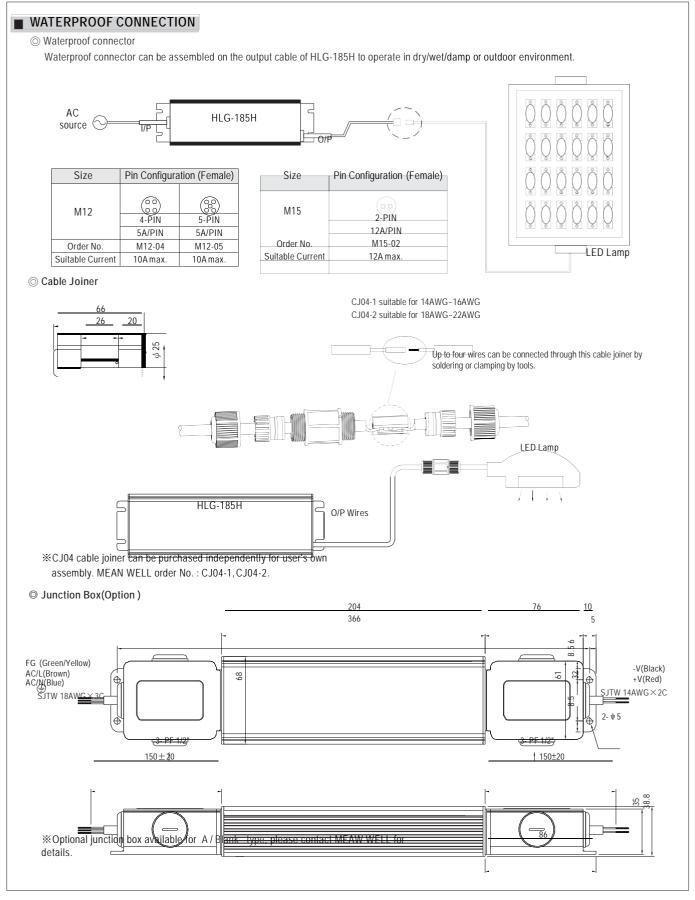



RS Part Number	Mean Well Part Number	RS Part Number	Mean Well Part Number		
7211932	HLG-185H-12B	7382416	HLG-185H-12A		
7211935	HLG-185H-15B	7382419	HLG-185H-15A		
7211948	HLG-185H-24B	7382422	HLG-185H-24A		
7211945	HLG-185H-36B	7382429	HLG-185H-36A		
7211957	HLG-185H-48B	7382431	HLG-185H-48A		