




# Miniature Slide Switches

## Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 20 °C to + 85 °C / MFP 213x: - 25 °C to + 85 °C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C ± 5 °C

## Models:                      Switching functions

MFP 113 D – RA    on    on  
non-shorting

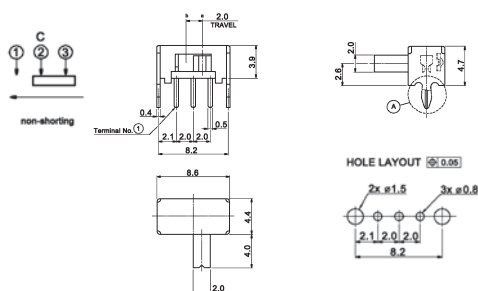

MFP 213 N – RA    on    on  
non-shorting

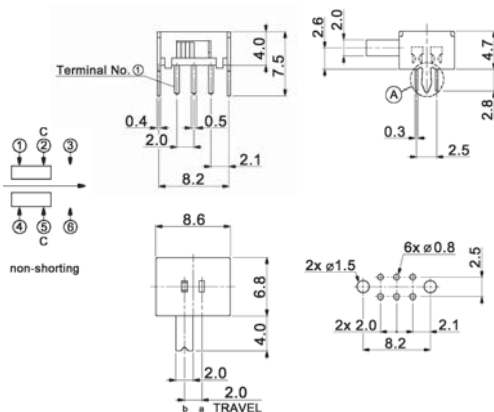

MFP 213 P – RA    on on on  
shorting

