



CERAMIC

High Pass Filter

HFCN-2502+

50Ω 25 to 57 GHz

THE BIG DEAL

- Pass Band, 25 to 57 GHz
- Low Insertion Loss, Typ. 1.8 dB
- Return Loss, Typ. 13 dB
- Stop Band Rejection, Typ. 17 dB
- Power Handling, 1W



Generic photo used for illustration purposes only

CASE STYLE: FV1206-12

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Test & Measurement Equipment
- SATCOM
- 5G mmWave Radio Systems

PRODUCT OVERVIEW

HFCN-2502+ is a miniature low temperature co-fired ceramic (LTCC) high pass filter with a 25 to 57 GHz passband supporting a variety of applications. This model provides 1.8 dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in a tiny 1206 ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

| Feature | Advantages |
|---------------------|--|
| Ultra-wide passband | More than an octave bandwidth for wideband applications |
| Cost effective | LTCC is a scalable technology that is cost effective due to ease of production in high quantities. |
| Small size 1206 | Allows for high layout density of circuit boards, while minimizing effects of parasites. |
| Surface Mountable | Suitable for very high volume automated assembly process. |

REV. OR
ECO-016066
HFCN-2502+
ATHARVA/CP/AM
221223





CERAMIC

High Pass Filter

HFCN-2502+

50Ω 25 to 57 GHz

ELECTRICAL SPECIFICATIONS^{1,2} AT 25°C

| Parameter | | F# | Frequency (GHz) | Min. | Typ. | Max. | Units |
|-----------|----------------|-------|-----------------|------|------|------|-------|
| Stop Band | Insertion Loss | DC-F1 | 0.1 - 10.4 | — | 20.9 | — | dB |
| | | F1-F2 | 10.5 - 19.2 | — | 17.2 | — | |
| Pass Band | Insertion Loss | F3-F4 | 25 - 33.7 | — | 1.0 | 1.5 | dB |
| | | F4-F5 | 33.8 - 50 | — | 1.8 | 2.5 | |
| | | F5-F6 | 50.1 - 57 | — | 2.8 | 3.6 | |
| | Return Loss | F3-F4 | 25 - 33.7 | — | 16.7 | — | dB |
| | | F4-F5 | 33.8 - 50 | — | 13.6 | — | |
| | | F5-F6 | 50.1 - 57 | — | 15.6 | — | |

1. Measured on Mini-Circuits Test Board TB-HFCN-2502C+ with connectors and feedlines effects de-embedded using 2X Thru IEEE P370 method.

2. This component is not intended to act as a DC block. Please consult with Mini-Circuits for further details.


DC blocking capacitors are required in applications where DC voltage and/or current is present at either input or output ports.

ABSOLUTE MAXIMUM RATINGS


| Parameter | Ratings |
|-----------------------|-----------------|
| Operating Temperature | -55°C to +125°C |
| Storage Temperature | -55°C to +125°C |
| RF Power Input | 1W max. |

Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

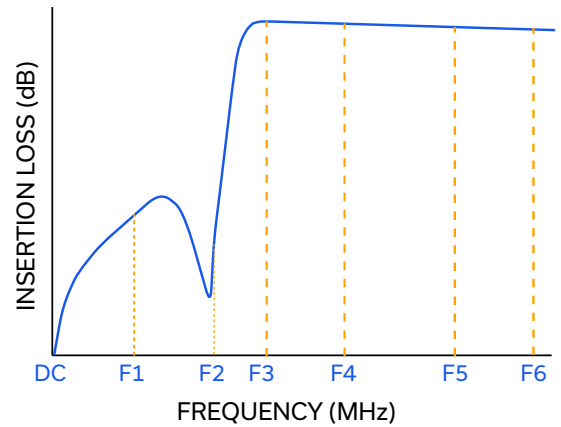

FUNCTIONAL SCHEMATIC

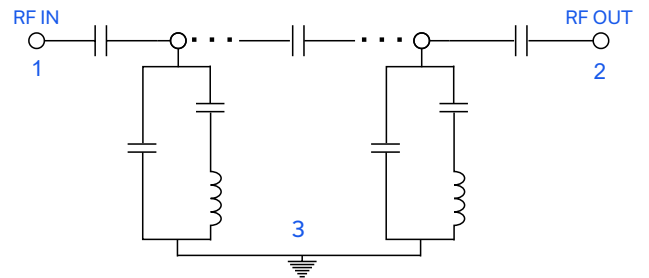



CERAMIC

High Pass Filter

HFCN-2502+

Mini-Circuits


50Ω 25 to 57 GHz

PIN CONNECTIONS

| | |
|--------|---|
| RF IN | 1 |
| RF OUT | 2 |
| GROUND | 3 |

PRODUCT MARKING: VK

EVALUATION BOARD MCL P/N: TB-HFCN-2502C+ SUGGESTED PCB LAYOUT (PL-748)

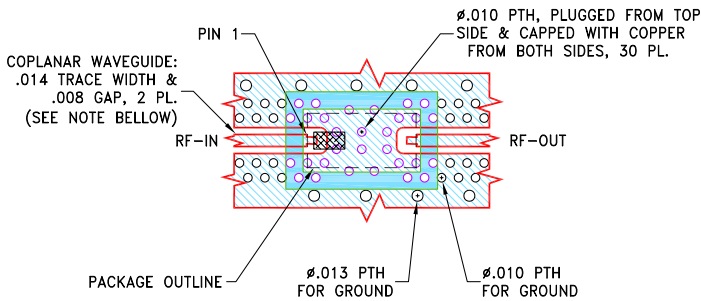

NOTES:


1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR MEGTRON-7 R5785(N); DIELECTRIC THICKNESS: .0079±.001; COPPER: HVLP/HVLP. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

OUTLINE DRAWING

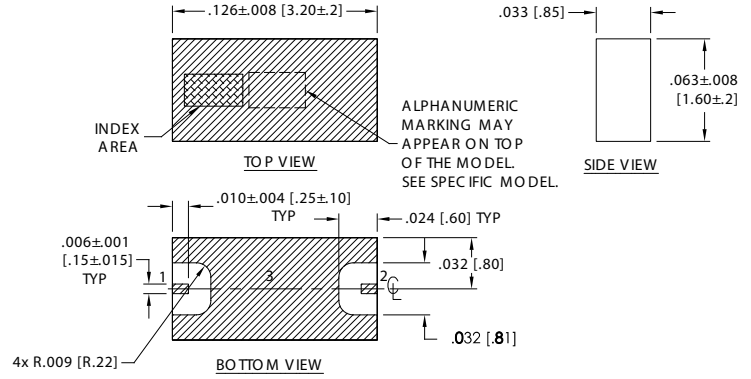

METALLIZATION

Weight: .017 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl.±.01; 3 Pl.±.005

TAPE & REEL INFORMATION: F75



CERAMIC

High Pass Filter





HFCN-2502+

Mini-Circuits

50Ω 25 to 57 GHz

TYPICAL PERFORMANCE DATA AT 25°C

| Frequency (GHz) | Insertion Loss (dB) | Return Loss (dB) |
|-----------------|---------------------|------------------|
| 0.1 | 68.94 | 0.04 |
| 0.5 | 49.87 | 0.11 |
| 1.0 | 43.45 | 0.06 |
| 5.0 | 28.99 | 0.07 |
| 10.4 | 21.20 | 0.18 |
| 10.5 | 21.10 | 0.18 |
| 19.2 | 28.49 | 0.43 |
| 25.0 | 0.92 | 20.81 |
| 33.7 | 0.68 | 22.11 |
| 33.8 | 0.68 | 22.04 |
| 40.0 | 0.92 | 27.03 |
| 50.0 | 1.63 | 24.32 |
| 50.1 | 1.62 | 24.86 |
| 57.0 | 2.25 | 32.69 |
| 65.0 | 3.93 | 9.96 |

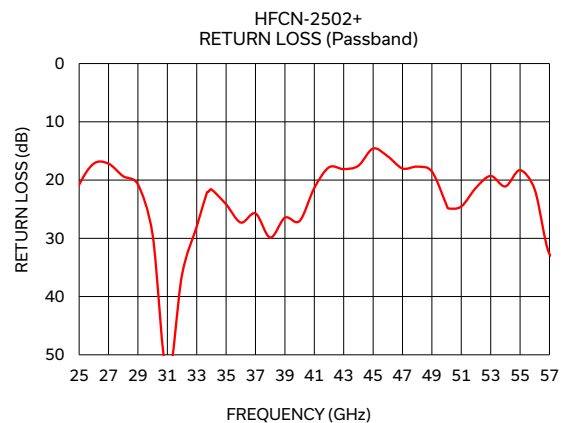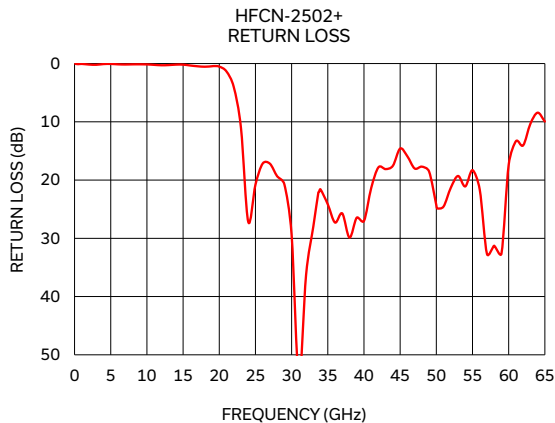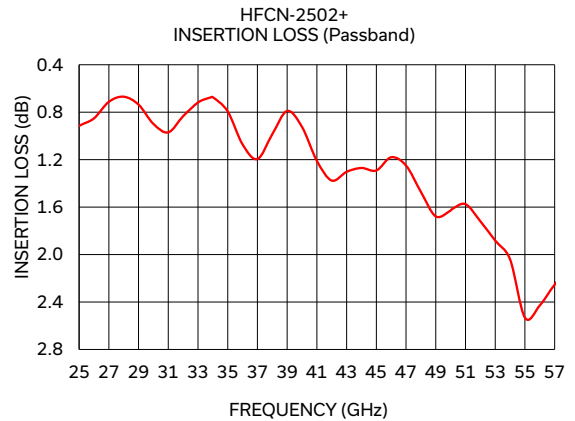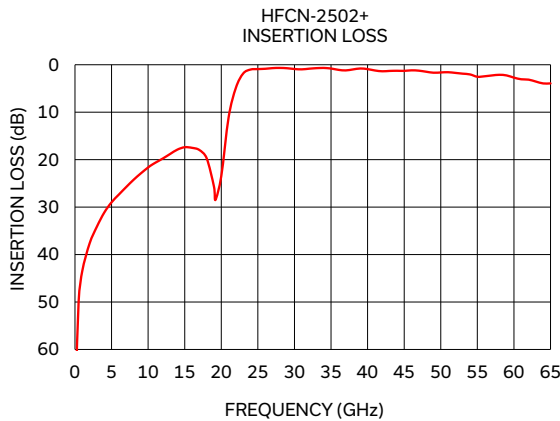

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[HFCN-2502+](#)