

# ADA-TQFP44

**Introduction:**

This adapter connect the pins of a 44pin TQFP device to a 48 pin DIP equivalent. It accept a TQFP44 device and plug into a DIP socket. You can use it for EPROMs, microcontrôleurs. Socket type "open".


**Connections of this adapter:**

ZIF48	TQFP44	TQFP44	ZIF48
1			48
2			47
3	39	38	46
4	40	37	45
5	41	36	44
6	42	35	43
7	43	34	42
8	44	33	41
9	1	32	40
10	2	31	39
11	3	30	38
12	4	29	37
13	5	28	36
14	6	27	35
15	7	26	34
16	8	25	33
17	9	24	32
18	10	23	31
19	11	22	30
20	12	21	29
21	13	20	28
22	14	19	27
23	15	18	26
24	16	17	25

**Package TQFP44:**



**Dimensions of the devices accepted:**

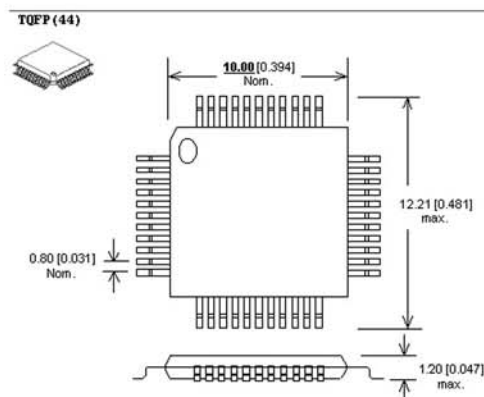

**Examples of supported devices:**  
 MICROCHIP PIC16F877  
 ATMEL AT89C52

**Equivalent adapters from other manufacturers:**  
 WL-TQFP44-U2  
 PA44QF44D / CA44TQ44D-EO  
 SA245A

**Item includes:**

Adapter.  
 User manual in English and French.