

Evaluates: 1-Wire Peripheral and iButton Devices

DS9481R USB-to-1-Wire/iButton Adapter

General Description

The DS9481R is a USB-to-1-Wire® adapter for easy PC connectivity to 1-Wire devices. The adapter provides an RJ11 connector with the signals to communicate with all 1-Wire and iButton® devices that support a 3.3V data I/O level. Additionally, the adapter provides the support and signaling to program 1-Wire/iButton EEPROM and one-time programmable (OTP)/EPROM devices. To provide a total hardware solution, the DS9481R can readily be used with the DS9120 socket adapter to create a 1-Wire PC programmer for 1-Wire peripheral devices (contact factory for more information). The equivalent peripheral hardware solution for the iButton is the DS1402D-DR8.

Adapter Contents

QTY	DESCRIPTION
1	USB-to-1-Wire adapter Analog Devices DS9481R-3C7+
1	USB Type A-to-USB Mini-Type B cable Qualtek Electronics Corp. 3021003-03

Features

- Driver Support for Windows® 11 and Windows 10 Operating Systems
- Enumerates as a Virtual PC COM Port by Use of the Prolific PL-2303GC USB-to-UART Bridge IC
- Emulates the DS2480B 1-Wire Line Driving Functionality
- 1-Wire OTP/EPROM Programming Provided Without the Need of an External Power Supply (12V on OW, 7V on PULSE)
- 3.3V Read/Write Operation to 1-Wire/iButton Devices
- RJ11 Interface for Standard Connectivity Accessories such as the DS9120 Socket Adapter
- Supports Standard and Overdrive 1-Wire Communication
- Provides Strong Pullup to 3.3V
- Fully Compliant with USB 2.0 Specification

Ordering Information

PART	TYPE
DS9481R-3C7+	Adapter

+Denotes lead(Pb)-free and RoHS compliant.

DS9481R USB-to-1-Wire/iButton Adapter



1-Wire and iButton are registered trademarks of Maxim Integrated Products, Inc.
Windows is a registered trademark of Microsoft Corporation.

19-5608; Rev 1; 3/23

DS9481R USB-to-1-Wire/ iButton Adapter

Evaluates: 1-Wire Peripheral and
iButton Devices

Quick Start

Recommended Equipment

- Analog Devices DS9481R (included in adapter)
- USB type-A to USB Mini type-B cable (included in adapter)
- RJ11 cable assembly (not included)
- PC with a Windows 11 or Windows 10 OS and a spare USB port

Note: In the following sections, software-related items are identified by bolding. Text in **bold** refers to items directly from the adapter software. Text in **bold and underlined** refers to items from the Windows operating system.

Procedure

- 1) Do the following to install the PL-2303GC Prolific driver:
 - a) Download the latest driver version from [Prolific](#).
 - b) **Open** and **Run** the latest version of the Driver Installer.
 - c) Follow the directions of the **Install Wizard** until **Finish** is reached for the PL-2303 USB-to-serial driver installation. Close by clicking the **Finish** button.
- 2) Do the following to install the 1-Wire drivers:
 - a) Go to the [Download 1-Wire/iButton Drivers for Windows](#) webpage..
 - b) From the **Choose Operating System** drop-down list, select your OS.
 - c) From the **Select File** drop-down list, select 32-bit or 64-bit 1-Wire drivers for the architecture being used by your OS.
 - d) Click the **Download** button.
 - e) When prompted by the question **Do you want to run or save this file?**, select **Run**.
 - f) When you get a security warning that says **Do you want to run the software?**, select **Run**.
 - g) Read and check the box if you accept the license agreement and click **Install**.
 - h) Click the **Finish** button to exit the Setup Wizard.
- 3) The DS9481R USB-to-1-Wire adapter uses both the Prolific PL-2303GC and the Analog Devices MAXQ610 to emulate a virtual COM-to-1-Wire port on any PC. Find the enumeration of the virtual COM port by inserting the DS9481R into a spare USB port on the computer. Determine the COM port by looking in **Control Panel**→**System**→**Hardware**→**Device Manager** and expand **Ports (COM & LPT)**. The port is COM5 in the example shown in Figure 2.



Figure 1. DS9481R USB-to-1-Wire/iButton Adapter and Cable

DS9481R USB-to-1-Wire/ iButton Adapter

Evaluates: 1-Wire Peripheral and iButton Devices

You have now completed the installation of the DS9481R adapter. Obtain the adapter software and directions for installation for your 1-Wire/iButton peripheral device by contacting the Analog Devices online [Technical Support Portal](#).

Detailed Description of Connectors

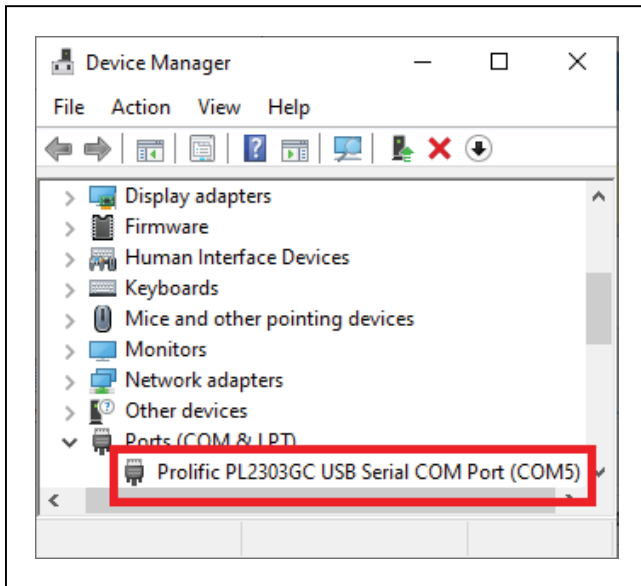


Figure 2. DS9481R COM Port

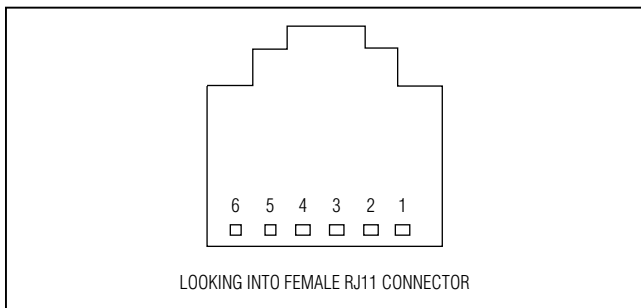


Figure 3. 1-Wire RJ11 Port

Table 1. 1-Wire RJ11 Pinout

CONNECTOR PIN	SIGNAL NAME
1	3.3V
2	GND
3	OW (DATA)
4	OWGND
5	PULSE
6	GP

RJ11 Pinout

Table 1 and Figure 3 show the RJ11 pinout mounted on the DS9481R PCB at J1. The RJ11 pin 1 can supply 3.3V and can be used for auxiliary board power. The GND is the ground of the 3.3V supply. The signal OW (DATA) stands for the 1-Wire data bus. The ground return for OW (DATA) is the signal OWGND. The PULSE signal is to be used as the VCC power supply for OTP 1-Wire peripheral parts. The PULSE signal is typically 3.3V, but also can provide the needed programming pulse for OTP parts. The GP signal is reserved for future general-purpose usage and is functionally not used by the DS9481R.

Mini-USB Pinout

The 5-position Mini-USB type AB connector is mounted at CN1 of the DS9481R PCB, as shown in Table 2.

Hardware/Firmware Capabilities

The DS9481R uses both the Prolific PL-2303GC and the Analog Devices MAXQ610. The PL-2303GC is fully compliant with the USB 2.0 specification for the Windows 11 and Windows 10 OS and provides a bridge for the USB-to-UART connection. The MAXQ610 is loaded with firmware that emulates the functionality of the DS2480B serial-to-1-Wire line driver at a lower 3.3V operation voltage. The MAXQ610 functions as a UART-to-1-Wire bridge and can serve custom application needs with firmware programmability.

Table 2. Mini-USB Type AB USB Pinout

CONNECTOR PIN	SIGNAL NAME
1	5.0V
2	DMCN
3	DPCN
4	NC
5	GND
6-9	GND_EARTH

DS9481R EV Kit Bill of Materials

DESIGNATION	QTY	DESCRIPTION
C1, C6, C21	3	4.7uF, 16V Y5V ceramic capacitors (0805) TDK Corp. C2012Y5V1C475Z
C2, C3	2	2.2uF, 16V Y5V ceramic capacitors (0805) Murata GRM21BF51C225ZA01L
C4, C7	2	0.22uF Q10%, 16V X7R ceramic capacitors (0603) TDK Corp. C1608X7R1C224K
C5, C15, C22	3	10nF ±5%, 16V X7R ceramic capacitors (0603) AVX 06035C103JAT2A
C8, C12, C13, C14, C20, C23	6	0.1uF, 16V X7R ceramic capacitors (0603) KEMET C0603C104K4RACTU
C10	1	10uF, 10V Y5V ceramic capacitor (0805) TDK Corp. C2012Y5V1C106Z
C16	0	Do not populate, 470pF ceramic capacitor (0603)
C17, C18	2	1uF, 10V X7R ceramic capacitor (0603) Taiyo Yuden LMK107B7105KA-T
C26	1	2.2uF, 16V X5R ceramic capacitors (0603)
C19	1	10pF, 16V NP0 ceramic capacitor (0603) TDK Corp. C1608C0G1H100D
C9, C24, C25	0	Do not populate, capacitors
CN1	1	USB Mini-AB connector, right-angle, SMD, 5-position JAE Electronics DX3R005HN2E700
D1	1	30V, 200mA Schottky diode (SOT23) Diodes Inc./Zetex BAT54TA
D2	1	15V, 350mA zener diode (SOT23) Diodes Inc. MMBZ5245B-7-F
D3	1	Orange LED (TSS type) (0603) Panasonic/SSG LNJ812R83RA
D4	1	Dual CC Schottky diode (SOT23) Diodes Inc./Zetex BAT54CTA
FB1, FB2	2	220W, 2000mA ferrite chips (0805) Murata BLM21PG221SN1D
J1	1	6-position, right-angle, PCB-mounted jack Tyco 5520425-3
J2	0	Do not populate, JTAG connector
Q1, Q3	2	130mA, 50V p-channel MOSFETs (SOT23-3) Fairchild Semiconductor BSS84
Q2, Q4, Q5, Q7	4	115mA, 60V n-channel MOSFETs (SOT23) Diodes, Inc. 2N7002-7-F
Q6	1	3.9A, 20V p-channel MOSFET (SOT23) NXP PMV65XP,215
R1, R29	0	Do not populate, resistors
R2, R3, R5	0	Do Not Populate Resistors
R4, R16, R21	3	1.5kOHM Q1%, 1/10W SMD resistors (0603) Panasonic ECG ERJ-3EKF1501V
R6, R24	2	10kOHM Q1%, 1/10W SMD resistors (0603) Yageo RC0603FR-0710KL
R7, R14, R26	3	1kOHM Q1%, 1/10W SMD resistors (0603) Yageo RC0603FR-071KL
R8, R13, R17, R20, R27, R30	5	100kOHM Q1%, 1/10W SMD resistors (0603) Yageo RC0603FR-07100KL

DS9481R EV Kit Bill of Materials (continued)

DESIGNATION	QTY	DESCRIPTION
R9	1	979Ohm Q5%, 1/10W SMD resistor (0603)
		Yageo RC0603FR-07750RL
R10, R29	1	00Ohm Q1%, 1/10W SMD resistor (0603)
		Panasonic ECG ERJ-3GEY0R00V
R11	1	330Ohm Q1%, 0.1W SMD resistor (0603)
		Rohm MCR03EZPF33R0
R12, R15, R22	3	4.99Ohm Q1%, 1/10W SMD resistors (0603)
		Yageo RC0603FR-074R99L
R18	1	2.2kOHM Q5%, 1/10W SMD resistor (0603)
		Stackpole Electronics RMCF 1/16 2.2K 1% R
R19	1	4.7k OHM Q5% (0603)
R23	1	51kOHM Q0.1%, 1/10W SMD resistor (0603)
		Panasonic ECG ERA-3AEB513V
R25	1	11kOHM Q0.1%, 1/10W SMD resistor (0603)
		Vishay/Dale TNPW060311K0BEEA
R28	1	100Ohm Q1%, 1/10W SMD resistor (0603)
		Yageo RC0603FR-0710RL
R31	1	32.4kOHM Q1%, 1/10W SMD resistor (0603)
		Vishay/Dale TNPW060332K4BEEA
R32	1	30.1kOHM Q0.1%, 1/10W SMD resistor (0603)
		Panasonic ECG ERJ-3EKF3012V
R33	1	50kOHM Q1%, 1/10W SMD resistor (0603)
		Panasonic ECG ERJ-3EKF4992V
R36	1	27 Ohm Q1%, 1/10W SMD (0603)
RT1	1	0.12A, 30V PTC resettable fuse (1206)
		Bourns MF-NSMF012-2
SW1	0	Do not populate, switch
U1	1	Low-dropout, 300mA linear regulator (5 SOT23)
		Analog Devices MAX8887EZK33+T
		(Top Mark: ADPZ)
U2	1	12V, 30mA Flash memory programming supply (8 SO)
		Analog Devices MAX662ACSA+
U3	1	TinyLogicM UHS inverter (5 SOT23)
		Fairchild NC7SZ04M5X
U4	0	Do not populate, Silicon oscillator
U5	1	USB-to-serial bridge controller (28 SSOP)
		Prolific PL-2303GC SSOP
U6	1	16-bit microcontroller with infrared module (32 TQFN-EP*)
		Analog Devices MAXQ610A-9410+
U7	1	2-channel ESD protector (6 FDFN)
		Analog Devices MAX13204EALT+
		(Top Mark: BV)
U8	1	High-voltage, low-power linear regulators (5 SOT23)
		Analog Devices MAX1616EUK+
		(Top Mark: ABZD)
U9	1	1.8V comparator (5 SOT23) STMicroelectronics TS3021ILT
—	1	PCB: DS9481R REV A5

DS9481R USB-to-1-Wire/ iButton Adapter

Evaluates: 1-Wire Peripheral and
iButton Devices

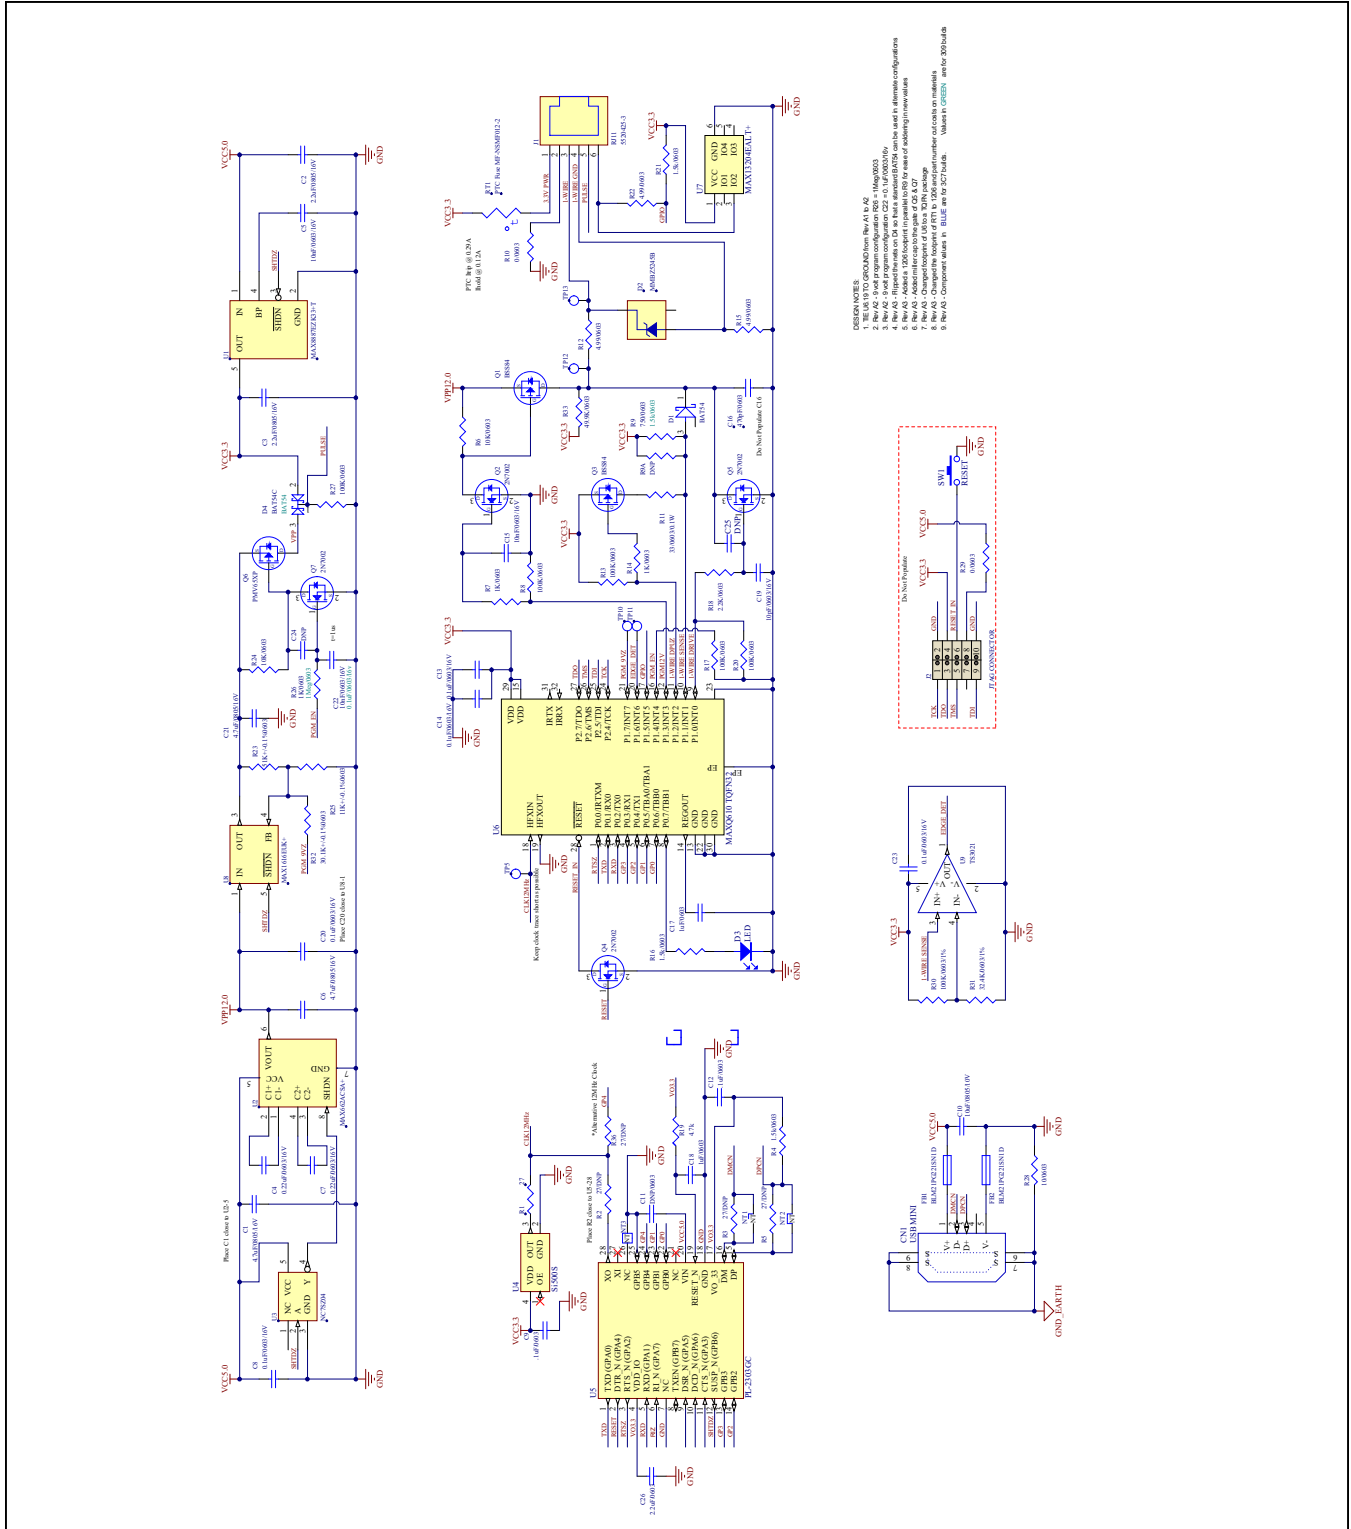


Figure 4. DS9481R Adapter Board Schematic


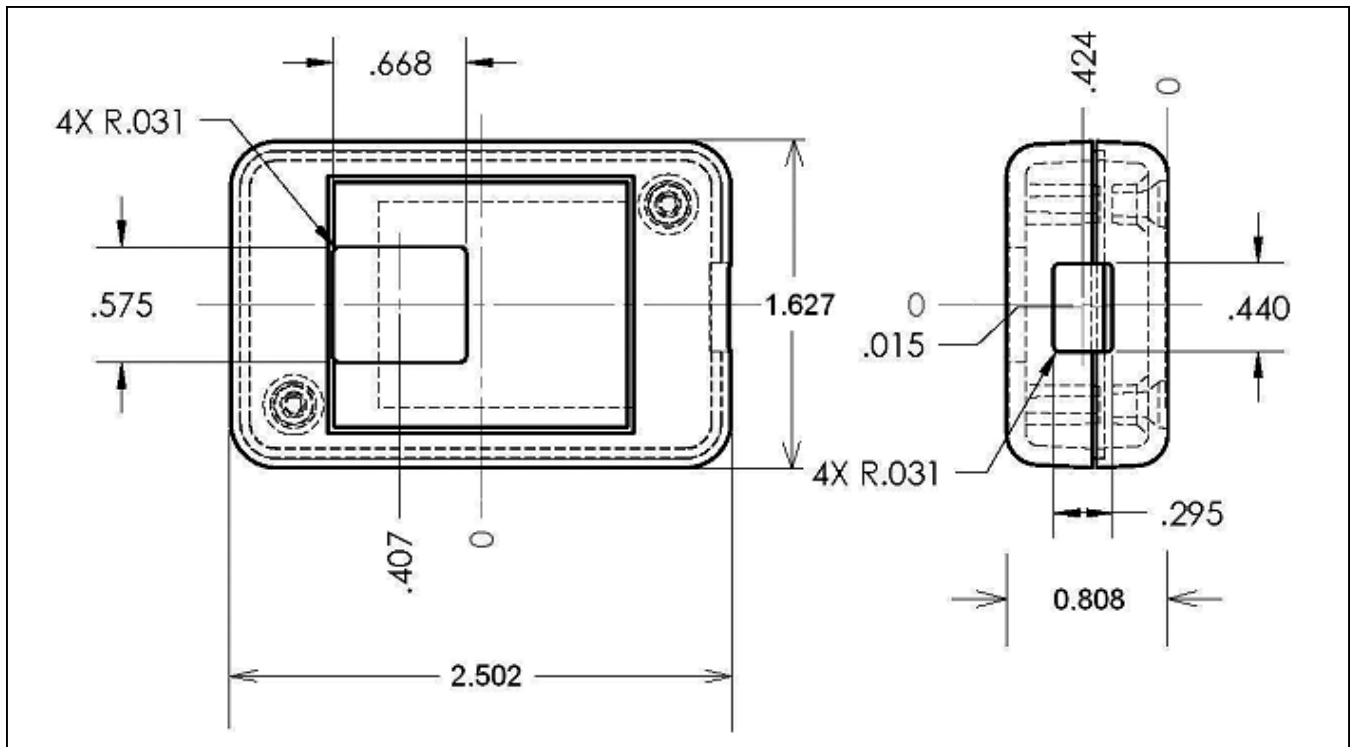


Figure 5. DS9481R Adapter Enclosure Dimensions


DS9481R USB-to-1-Wire/ iButton Adapter

Evaluates: 1-Wire Peripheral and
iButton Devices


DS9481R EV Kit PCB Layout

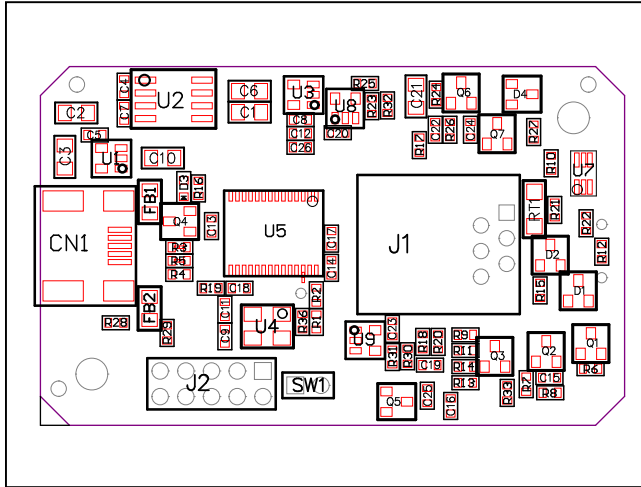

DS9481R Adapter Board—Top Assembly

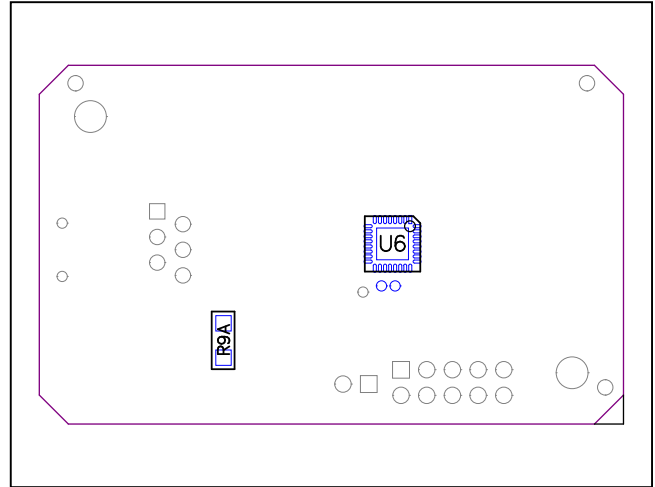

DS9481R Adapter Board—Bottom Assembly

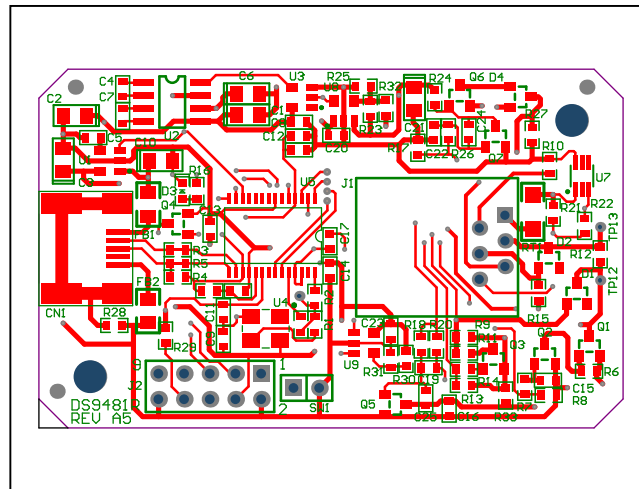


DS9481R Adapter Board—Top Silkscreen


DS9481R USB-to-1-Wire/ iButton Adapter

Evaluates: 1-Wire Peripheral and
iButton Devices


DS9481R EV Kit PCB Layout (continued)

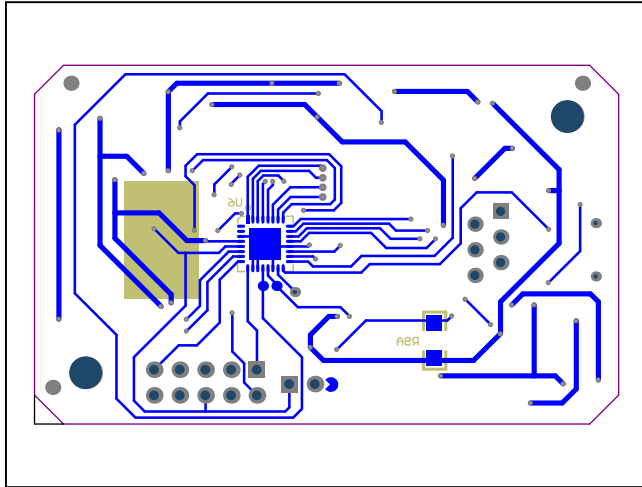

DS9481R Adapter Board—Top Assembly

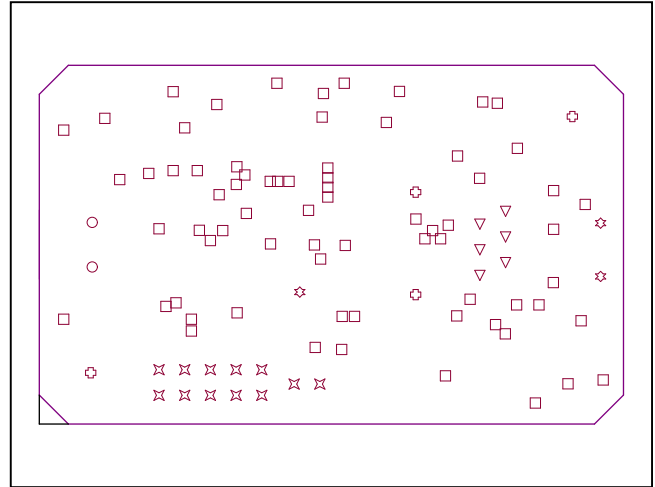

DS9481R Adapter Board—Bottom Assembly

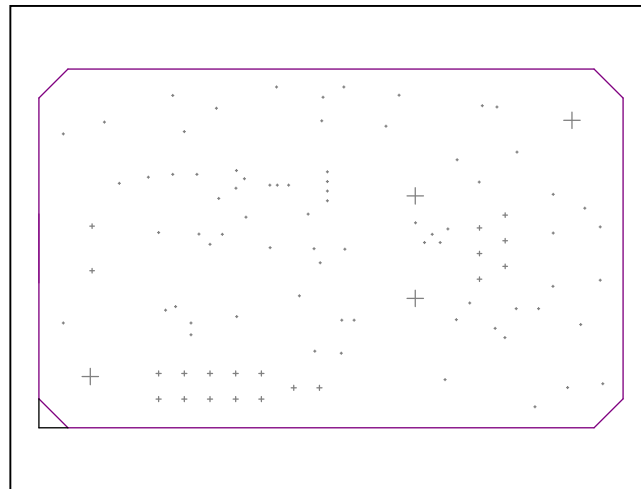

DS9481R Adapter Board—Top Silkscreen

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/10	Initial release	—
1	3/23	Updated for hardware changes	All



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[DS9481R-3C7+](#)