

2SB1202/2SD1802

High-Current Switching Applications

Applications

· Voltage regulators, relay drivers, lamp drivers, electrical equipment.


Features

- · Adoption of FBET, MBIT processes.
- · Large currrent capacity and wide ASO.
- · Low collector-to-emitter saturation voltage.
- · Fast switching speed.
- · Small and slim package making it easy to make 2SB1202/2SD1802-used sets smaller.

Package Dimensions


unit:mm

2045B

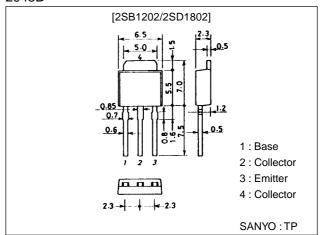

unit:mm

2044B

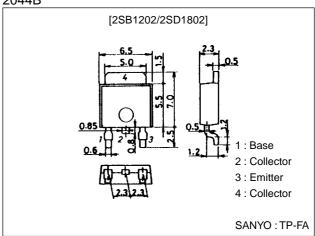

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges,or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

(): 2SB1202

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V _{CBO}		(-)60	V
Collector-to-Emitter Voltage	V _{CEO}		(-)50	V
Emitter-to-Base Voltage	V _{EBO}		(-)6	V
Collector Current	Ic		(-)3	А
Collector Current (Pulse)	I _{CP}		(-)6	А
Collector Dissipation	PC		1	W
		Tc=25°C	15	W
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		-55 to +150	°C


Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Llmit
Parameter			min	typ	max	Unit
Collector Cutoff Current	I _{CBO}	V _{CB} =(-)40V, I _E =0			(–)1	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} =(-)4V, I _C =0			(–)1	μA
DC Current Gain	h _{FE} 1	V _{CE} =(-)2V, I _C =(-)100mA	100*		560*	
	h _{FE} 2	V _{CE} =(-)2V, I _C =(-)3A	35			
Gain-Bandwidth Product	fT	V _{CE} =(-)10V, I _C =(-)50mA		150		MHz
Output Capacitance	C _{ob}	V _{CB} =(-)10V, f=1MHz		(39)25		pF
Collector-to-Emitter Saturation Voltage	VCE(sat)	I _C =(-)2A, I _B =(-)100mA		0.19	0.5	V
				(-0.35)	(-0.7)	V
Base-to-Emitter Saturation Voltage	V _{BE(sat)}	I _C =(-)2A, I _B =(-)100mA		(-)0.94	(-)1.2	V
Collector-to-Base Breakdown Voltage	V(BR)CBO	I _C =(-)10μΑ, I _E =0	(-)60			V
Collector-to-Emitter Breakdown Voltage	V(BR)CEO	I _C =(-)1mA, R _{BE} =∞	(-)50			V
Emitter-to-Base Breakdown Voltage	V(BR)EBO	I _E =(-)10μΑ, I _C =0	(-)6			V
Turn-ON Time	ton	See specified Test Circuit		70		ns
Storage Time	t _{stg}	See specified Test Circuit		(450)		ns
				650		ns
Fall Time	t _f	See specified Test Circuit		35		ns

 $[\]ast$: The 2SB1202/2SD1802 are classified by 100mA h_{FE} as follows :

100 R 200	140 S 280	200 T 400	280 U 560
-----------	-----------	-----------	-----------


Switching Time Test Circuit




I c=10 I B1=-10 I B2=1A


(For PNP, the polarity is reversed.)


 $Unit \, (resistance: \Omega, capacitance: F)$

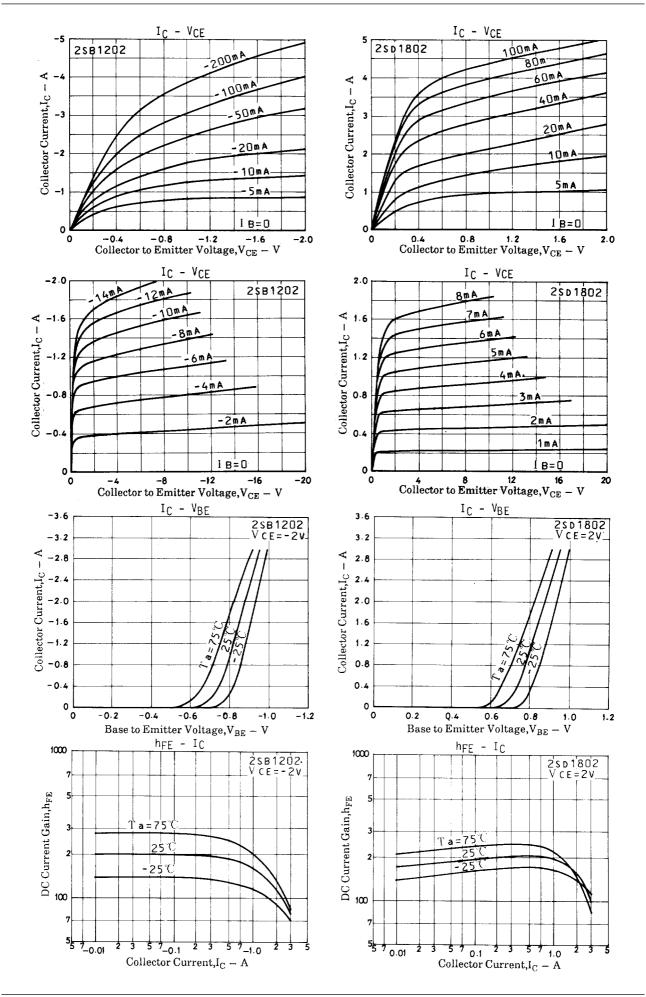

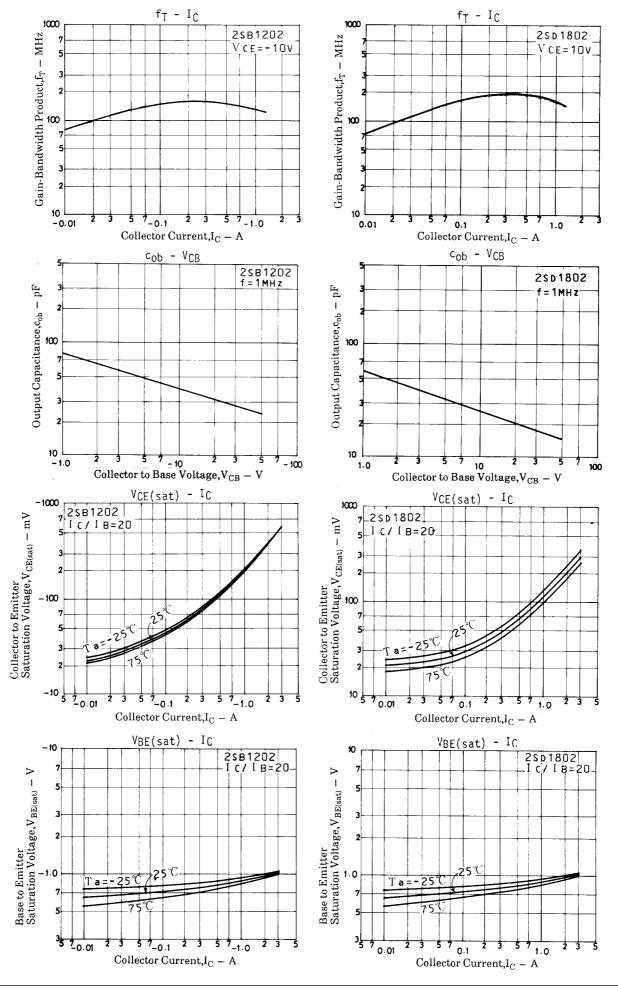

2SB1202/2SD1802

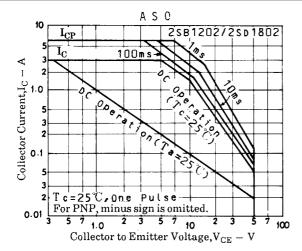

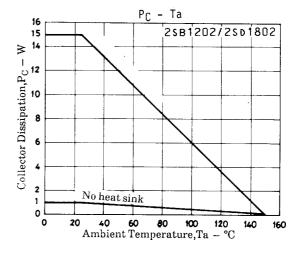

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any and all SANYO products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Japan, such products must not be exported without obtaining export license from the Ministry of International Trade and Industry in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1998. Specifications and information herein are subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.