FO-55111-A

HONEYWELL PART NUMBER
11SM144
PRODUCT CODE TWV4400

REV	DOCUMENT	CHANGED BY	CHECK
9	0079444	MBH 13JUL11	CMH

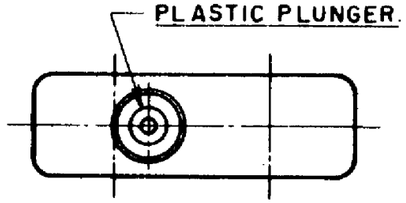

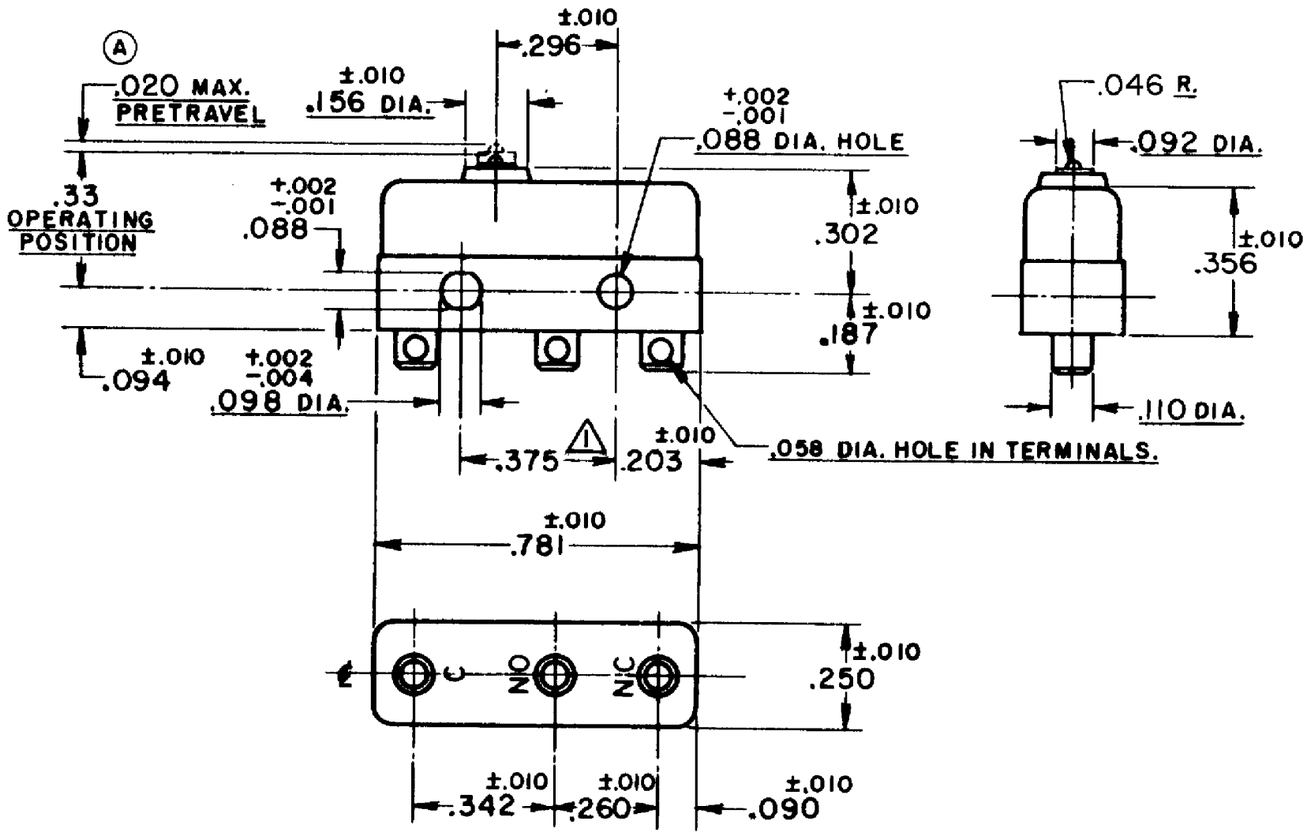

NOTE-

1. ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375 ±.002 CENTERS.
2. TERMINALS ARE PLATED FOR SOLDERING.
3. SWITCH WILL WITHSTAND TEMPERATURE OF 250°F.

RELEASE NO.	SR - 7853
REPLACES	-

CHARACTERISTICS	
OPERATING FORCE	3 OZ MAX
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.002 MAX
OVERTRAVEL	.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS			
	KEMA, CE	5A, 250V ~ T85 1E4	
	UL, CSA	5A, 250 VAC	BRAND L4
	UL	5A, 30 VDC	BRAND L304

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	.030
TWO PLACE	.XX	±	.015
THREE PLACE	.XXX	±	.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE
SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	11SM144	9

SCALE - | WEIGHT .006 LB MAX | SHEET 1 OF 1

Downloaded from Arrow.com.