




Adafruit Metro M0 Express - Designed for CircuitPython

Created by lady ada

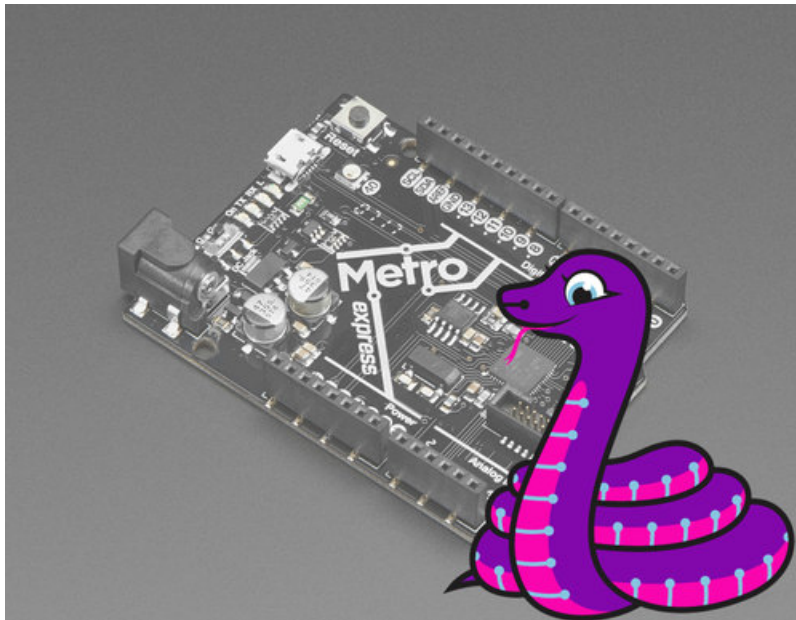

Last updated on 2021-08-30 12:03:57 PM EDT

Guide Contents

Guide Contents	2
Overview	9
Pinouts	13
Power Connections	13
Logic pins	15
Top Row	15
Bottom Row	15
Right side	16
Additional analog inputs	16
SPI Flash and NeoPixel	16
Other Pins!	17
Debug Interface	18
UF2 Bootloader Details	21
Entering Bootloader Mode	22
Using the Mass Storage Bootloader	24
Using the BOSSA Bootloader	25
Windows 7 Drivers	25
Verifying Serial Port in Device Manager	26
Running bossac on the command line	28
Using bossac Versions 1.7.0, 1.8	28
Using bossac Versions 1.9 or Later	28
Updating the bootloader	29
Getting Rid of Windows Pop-ups	30
Making your own UF2	31
Installing the bootloader on a fresh/bricked board	32
Arduino IDE Setup	33
https://adafruit.github.io/arduino-board-index/package_adafruit_index.json	34
Using with Arduino IDE	36
Install SAMD Support	36
Install Adafruit SAMD	37
Install Drivers (Windows 7 & 8 Only)	38
Blink	40
Successful Upload	41
Compilation Issues	42
Manually bootloading	42
Ubuntu & Linux Issue Fix	43
Adapting Sketches to M0 & M4	44
Analog References	44
Pin Outputs & Pullups	44
Serial vs SerialUSB	44
AnalogWrite / PWM on Feather/Metro M0	45
analogWrite() PWM range	46
analogWrite() DAC on A0	46
Missing header files	46
Bootloader Launching	47

Aligned Memory Access	47
Floating Point Conversion	47
How Much RAM Available?	48
Storing data in FLASH	48
Pretty-Printing out registers	48
M4 Performance Options	49
CPU Speed (overclocking)	49
Optimize	50
Cache	50
Max SPI and Max QSPI	50
Enabling the Buck Converter on some M4 Boards	51
Using SPI Flash	52
Read & Write CircuitPython Files	53
Format Flash Memory	55
Datalogging Example	56
Reading and Printing Files	56
Full Usage Example	57
Accessing SPI Flash	57
Metro M0 HELP!	59
My Metro M0 stopped working when I unplugged the USB!	59
My Metro never shows up as a COM or Serial port in the Arduino IDE	60
Ack! I "did something" and now when I plug in the Metro, it doesn't show up as a device anymore so I cant upload to it or fix it...	61
I can't get the Metro USB device to show up - I get "USB Device Malfunctioning" errors!	62
I'm having problems with COM ports and my Metro M0	63
I don't understand why the COM port disappears, this does not happen on my Arduino UNO!	64
I'm trying to upload to my 32u4, getting "avrdude: butterfly_recv(): programmer is not responding" errors	65
I'm trying to upload to my Metro M0, and I get this error "Connecting to programmer: .avrdude: butterfly_recv(): programmer is not responding"	66
I'm trying to upload to my Metro and i get this error "avrdude: ser_recv(): programmer is not responding"	67
What is CircuitPython?	69
CircuitPython is based on Python	69
Why would I use CircuitPython?	69
CircuitPython	71
Set up CircuitPython Quick Start!	71
Further Information	73
Installing Mu Editor	74
Download and Install Mu	74
Using Mu	74
Creating and Editing Code	76
Creating Code	76
Editing Code	78
Your code changes are run as soon as the file is done saving.	79
1. Use an editor that writes out the file completely when you save it.	79
2. Eject or Sync the Drive After Writing	80
Oh No I Did Something Wrong and Now The CIRCUITPY Drive Doesn't Show Up!!!	80
Back to Editing Code...	81
Exploring Your First CircuitPython Program	82
Imports & Libraries	82
Setting Up The LED	82

Loop-de-loops	83
What Happens When My Code Finishes Running?	83
What if I don't have the loop?	84
More Changes	85
Naming Your Program File	85
Connecting to the Serial Console	86
Are you using Mu?	86
Setting Permissions on Linux	87
Using Something Else?	88
Interacting with the Serial Console	89
The REPL	93
Returning to the serial console	96
CircuitPython Libraries	97
Installing the CircuitPython Library Bundle	98
Example Files	99
Copying Libraries to Your Board	100
Example: ImportError Due to Missing Library	100
Library Install on Non-Express Boards	101
Updating CircuitPython Libraries/Examples	102
Frequently Asked Questions	103
I have to continue using an older version of CircuitPython; where can I find compatible libraries?	103
Is ESP8266 or ESP32 supported in CircuitPython? Why not?	103
How do I connect to the Internet with CircuitPython?	104
Is there asyncio support in CircuitPython?	105
My RGB NeoPixel/DotStar LED is blinking funny colors - what does it mean?	106
What is a MemoryError?	107
What do I do when I encounter a MemoryError?	107
Can the order of my import statements affect memory?	108
How can I create my own .mpy files?	108
How do I check how much memory I have free?	108
Does CircuitPython support interrupts?	108
Does Feather M0 support WINC1500?	109
Can AVRs such as ATmega328 or ATmega2560 run CircuitPython?	109
Commonly Used Acronyms	109
Troubleshooting	110
Always Run the Latest Version of CircuitPython and Libraries	110
I have to continue using CircuitPython 5.x, 4.x, 3.x or 2.x, where can I find compatible libraries?	110
CPLAYBOOT, TRINKETBOOT, FEATHERBOOT, or GEMMABOOT Drive Not Present	110
You may have a different board.	111
MakeCode	111
MacOS	111
Windows 10	111
Windows 7 or 8.1	111
Windows Explorer Locks Up When Accessing boardnameBOOT Drive	112
Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied	113
CIRCUITPY Drive Does Not Appear	113
Windows 7 and 8.1 Problems	113
Serial Console in Mu Not Displaying Anything	113
CircuitPython RGB Status Light	114
ValueError: Incompatible .mpy file.	115

CIRCUITPY Drive Issues	115
Easiest Way: Use <code>storage.erase_filesystem()</code>	116
Old Way: For the Circuit Playground Express, Feather M0 Express, and Metro M0 Express:	116
Old Way: For Non-Express Boards with a UF2 bootloader (Gemma M0, Trinket M0):	118
Old Way: For non-Express Boards without a UF2 bootloader (Feather M0 Basic Proto, Feather Adalogger, Arduino Zero):	118
Running Out of File Space on Non-Express Boards	118
Delete something!	118
Use tabs	119
MacOS loves to add extra files.	119
Prevent & Remove MacOS Hidden Files	119
Copy Files on MacOS Without Creating Hidden Files	120
Other MacOS Space-Saving Tips	121
Device locked up or boot looping	122
Welcome to the Community!	123
Adafruit Discord	123
Adafruit Forums	124
Adafruit Github	125
ReadTheDocs	126
Advanced Serial Console on Windows	128
Windows 7 Driver	128
What's the COM?	128
Install Putty	129
Advanced Serial Console on Mac and Linux	131
What's the Port?	131
Connect with screen	133
Permissions on Linux	134
Uninstalling CircuitPython	137
Backup Your Code	137
Moving Circuit Playground Express to MakeCode	137
Moving to Arduino	138
CircuitPython Essentials	141
CircuitPython Pins and Modules	142
CircuitPython Pins	142
import board	142
I2C, SPI, and UART	143
What Are All the Available Names?	144
Microcontroller Pin Names	145
CircuitPython Built-In Modules	146
CircuitPython Built-Ins	147
Thing That Are Built In and Work	147
Flow Control	147
Math	147
Tuples, Lists, Arrays, and Dictionaries	147
Classes, Objects and Functions	147
Lambdas	147
Random Numbers	148
CircuitPython Digital In & Out	149
Find the pins!	150
Read the Docs	152

CircuitPython Analog In	153
Creating the analog input	153
get_voltage Helper	153
Main Loop	153
Changing It Up	154
Wire it up	154
Reading Analog Pin Values	157
CircuitPython Analog Out	158
Creating an analog output	158
Setting the analog output	158
Main Loop	158
Find the pin	159
CircuitPython PWM	163
PWM with Fixed Frequency	163
Create a PWM Output	164
Main Loop	164
PWM Output with Variable Frequency	165
Wire it up	166
Where's My PWM?	170
CircuitPython Servo	172
Servo Wiring	172
Standard Servo Code	175
Continuous Servo Code	175
CircuitPython Cap Touch	177
Create the Touch Input	177
Main Loop	177
Find the Pin(s)	178
CircuitPython Internal RGB LED	182
Create the LED	183
Brightness	183
Main Loop	183
Making Rainbows (Because Who Doesn't Love 'Em!)	184
Circuit Playground Express Rainbow	186
CircuitPython NeoPixel	187
Wiring It Up	187
The Code	188
Create the LED	190
NeoPixel Helpers	190
Main Loop	190
NeoPixel RGBW	191
Read the Docs	192
CircuitPython DotStar	193
Wire It Up	193
The Code	194
Create the LED	197
DotStar Helpers	197
Main Loop	198
Is it SPI?	198
Read the Docs	199
CircuitPython UART Serial	200
The Code	201
Wire It Up	202
Where's my UART?	205
Trinket M0: Create UART before I2C	206

CircuitPython I2C	208
Wire It Up	208
Find Your Sensor	211
I2C Sensor Data	212
Where's my I2C?	213
CircuitPython HID Keyboard and Mouse	215
CircuitPython Keyboard Emulator	215
Create the Objects and Variables	217
The Main Loop	217
CircuitPython Mouse Emulator	218
Create the Objects and Variables	220
CircuitPython HID Mouse Helpers	220
Main Loop	221
CircuitPython CPU Temp	222
CircuitPython Storage	223
Logging the Temperature	225
CircuitPython Expectations	228
Always Run the Latest Version of CircuitPython and Libraries	228
I have to continue using CircuitPython 3.x or 2.x, where can I find compatible libraries?	228
Switching Between CircuitPython and Arduino	228
The Difference Between Express And Non-Express Boards	229
Non-Express Boards: Gemma, Trinket, and QT Py	229
Small Disk Space	229
No Audio or NVM	229
Differences Between CircuitPython and MicroPython	229
Differences Between CircuitPython and Python	230
Python Libraries	230
Integers in CircuitPython	230
Floating Point Numbers and Digits of Precision for Floats in CircuitPython	230
Differences between MicroPython and Python	230
MakeCode	231
What is MakeCode Maker?	232
How is it related to makecode.adafruit.com ?	232
Is it open source?	233
Custom Extensions	236
Account setup	236
Commit and push	237
Conflicts	238
Testing your package	239
Editing Blocks	241
Blinky!	241
Editing JavaScript	243
Blocks to JavaScript	243
Downloading and Flashing	244
Step 1: Connect your board via USB	244
Step 2: Test your code in the simulator	244
Step 3: Download and flash your code	245
General Steps to copy over your program (not specific to any Operating system)	245
Saving and Sharing	246
Extracting your code from the board	246
Sharing	246

Downloads	247
Files	247
Schematic & Fabrication Print	247

