

LTM8031: Ultralow Noise, EMC 36V, 1A DC/DC μ Module[®] Regulator

DESCRIPTION

Demonstration circuit DC1597A features the LTM[®]8031, a step-down converter certified to meet the EN55022 radiated emissions standard. The LTM8031 is configured to deliver a 3.3V output from a 5V to 36V input with a 750kHz operating frequency. The wide input range supports a variety of input sources, such as automotive batteries, wall adaptors and industrial supplies. Under light load conditions, the LTM8031 enters Burst Mode[®] operation

to deliver high efficiency over a broad current range and maintain low output ripple.

The LTM8031 data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit 1597A.


Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, μ Module, Burst Mode, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITIONS
Input Voltage Range	5V to 36V
Output Voltage V _{OUT}	3.3V \pm 3%
Maximum Output Current	1A
Typical Switching Frequency	750kHz

BOARD PHOTO

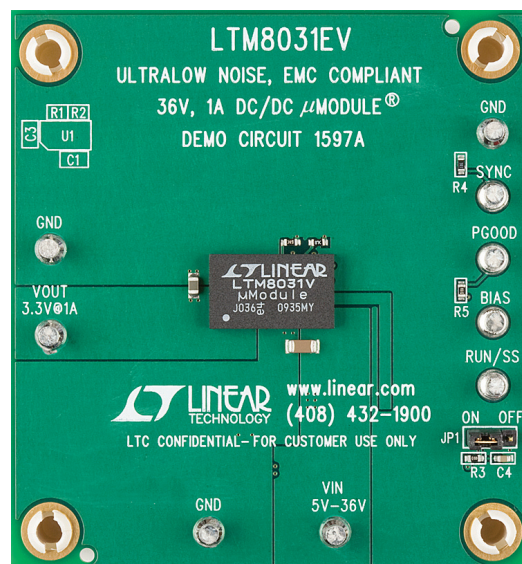

QUICK START PROCEDURE

Demonstration circuit 1597A is an easy way to evaluate the performance of the LTM8031. Refer to Figure 1 for proper measurement equipment set-up, and follow the procedure below.

1. Place JP1 on the ON position.
2. Preset the power supply within the input voltage range of LTM8031.
3. With the power supply off, connect the input power supply to V_{IN} and GND.
4. Turn on the input power supply.
5. Check for the proper output voltage.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

6. Once the proper output voltage is established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 2 for the proper scope probe technique.

QUICK START PROCEDURE

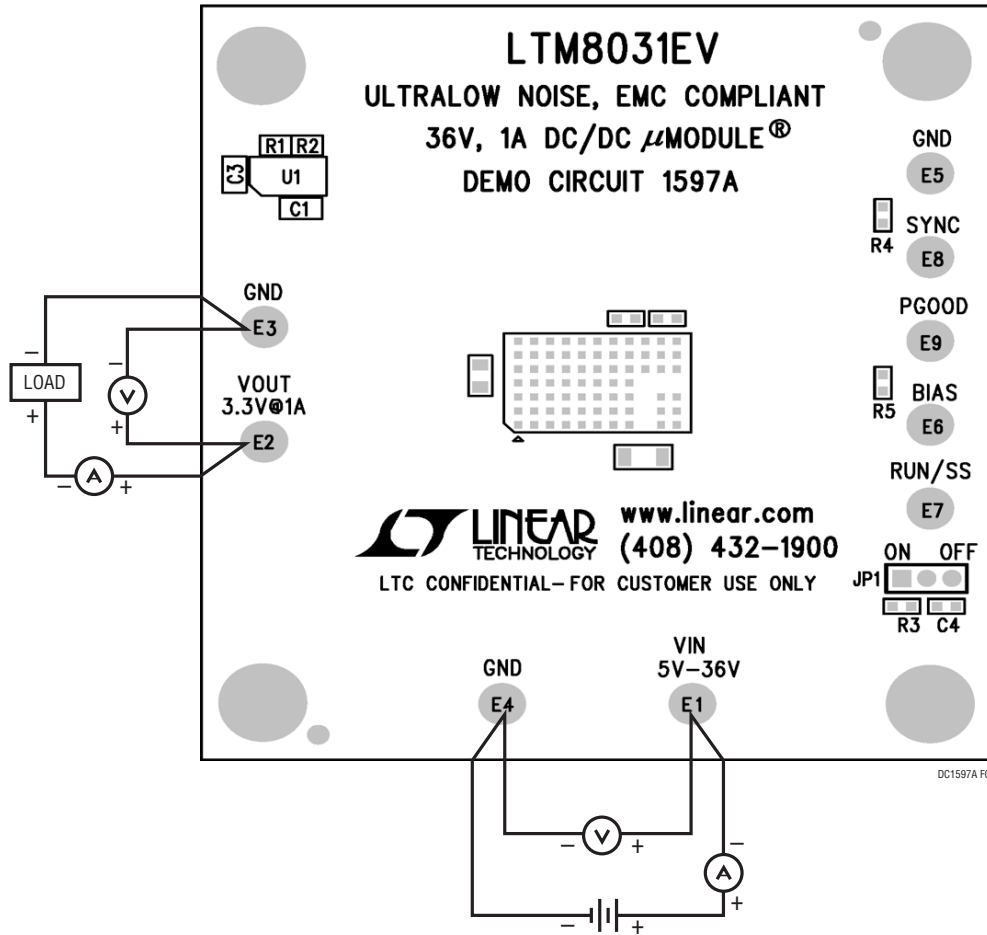


Figure 1. Proper Measurement Equipment Set-Up

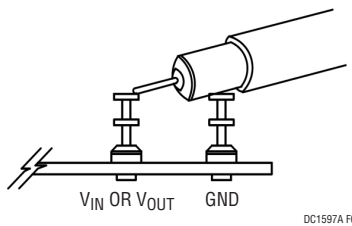



Figure 2. Measuring Input or Output Ripple

DEMO MANUAL DC1597A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C1	Cap., X7R, 2.2 μ F, 50V, 10%, 1206	Murata, GRM31CR71H225KA88L
2	1	C3	Cap., X5R, 22 μ F, 6.3V, 20%, 0805	Taiyo Yuden, JMK212BJ226KG-T
3	1	C4	Cap., X7R, 0.1 μ F, 50V, 10%, 0603	AVX, 06035C104KAT2A
4	1	R1	Res., 42.2k, 1%, 1/16W, 0603	NIC, NRC06F4222TRF
5	1	R2	Res., 78.7k, 1%, 1/16W, 0603	NIC, NRC06F7872TRF
6	2	R3, R5	Res., 100k, 1%, 1/16W, 0603	NIC, NRC06F1003TRF
7	1	R4	Res., 10k, 5%, 1/16W, 0603	NIC, NRC06J103TRF
8	1	U1	IC, LTM8031EV, μ Module	Linear Technology, LTM8031EV#PBF
Additional Demo Board Circuit Components				
1	1	C _{IN1}	Cap., 22 μ F, 50V	Suncon, 50CE22BS
2	0	C10 (Opt.)	Cap., 1206	
3	0	C11 (Opt.)	Cap., 22 μ F, 50V	
4	0	L1 (Opt.)	Ind., High Current, Size 2525	
Hardware/Components (For Demo Board Only)				
1	9	E1 to E9	Turret	Mill-Max, 2501-2-00-80-00-00-07-0
2	1	JP1	Header, 3-Pin, 2mm	Samtec, TMM-103-02-L-S
3	1	Shunt	Shunt, 2mm	Samtec, 2SN-BK-G
4	4	Stand-Off	Stand-Off, Nylon, 0.50" Tall	Keystone, 8833 (Snap On)

SCHEMATIC DIAGRAM

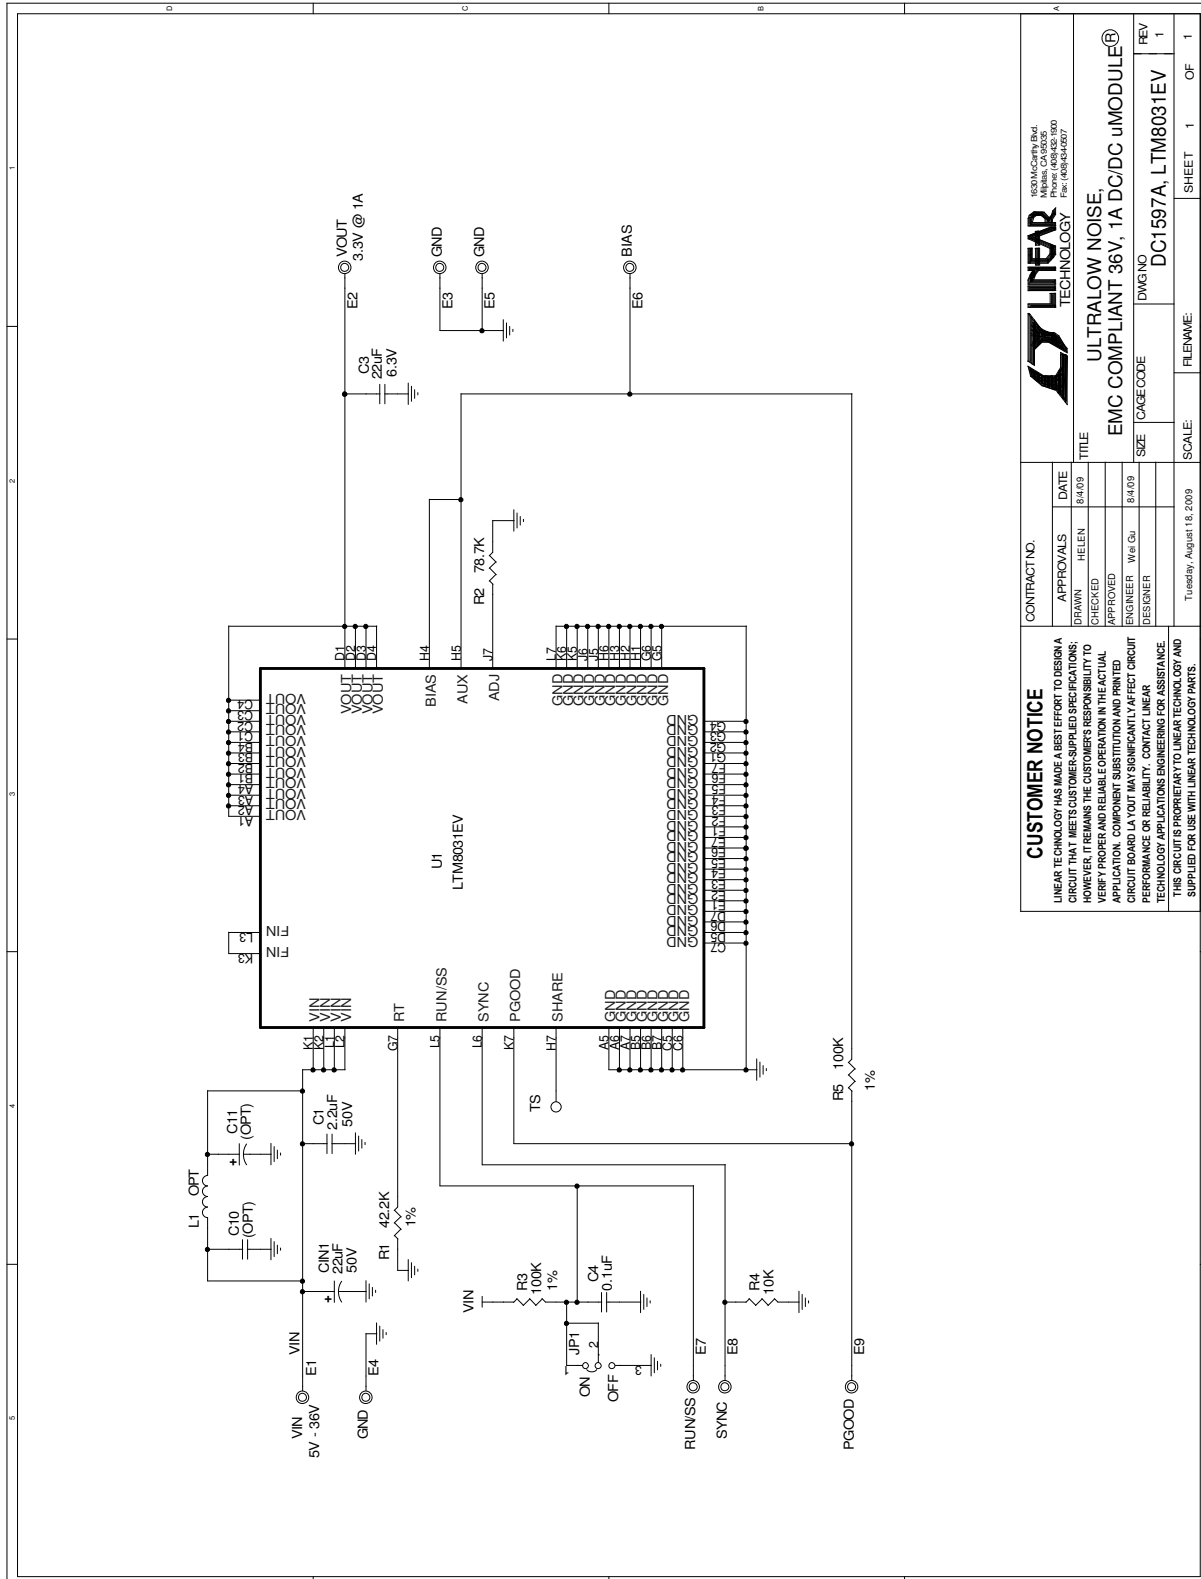

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.			
APPROVALS	DATE	TITLE	
DESIGNED BY HELEN	8/4/09	ULTRALOW NOISE, EMC COMPLIANT 36V, 1A DC/DC uMODULE®	
CHECKED		SIZE	CAGE CODE
APPROVED			
ENGINEER WES GU	8/4/09	DWG NO	DC1597A, LTM8031EV
DESIGNER		SCALE	FILENAME
Tuesday, August 18, 2009		SHEET	1 OF 1

DEMO MANUAL DC1597A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[DC1597A](#)