Downloaded from Arrow.com.

DIMENSIONS mm (inches)

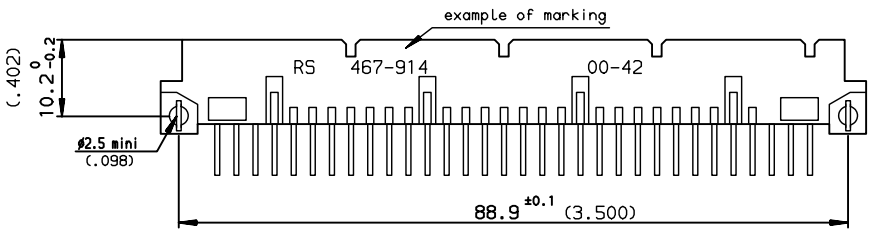

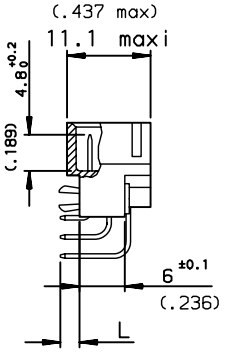

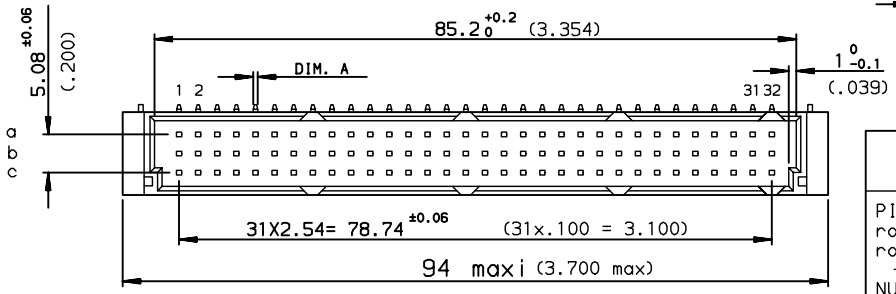

PCB DRILLING

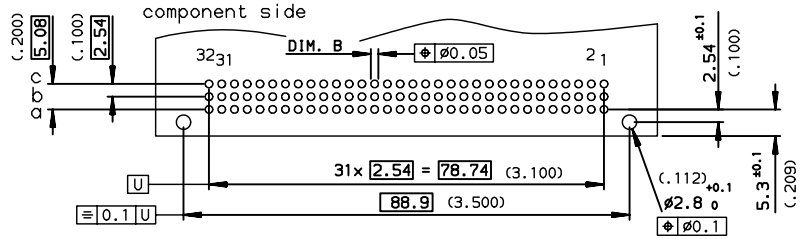

PART NUMBER	8609	□	□	71	□	□	□	5	□
PIN OUT									
rows a-b-c			3		96				
rows a-c			4		64				
NUMBER OF CONTACTS									
TERMINATION									
L = 2.75 ±0.15 (.108) A = Ø0.6 0 -0.08 B = Ø0.8 +0.3 0							13		
OPTIONS									
no option							7		
with harpoons — for PCB thickness 1.6 mm							H		
PERFORMANCE CLASS									
DIN 41612 class 3							4		
DIN 41612 class 2							5		
DIN 41612 class 1							6		
TERMINATION TYPE									
TIN LEAD								-485E1	
LEAD FREE								· ATLF	

SPECIFICATION 485 or ATLF

specific marking : customer part number + date code

GENERAL CHARATERISTICS and ROHS INFORMATIONS
SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	ROU	2000/11/20
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm		
	TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr ROUILLARD 2000/11/20	ANGULAR	LINEAR	0.X ±0.1	size A3	Scale 1.5	
Eng ROUILLARD 2000/11/20			0.XX ±0.1			
Chr LEGARE 2000/11/20	0.XX° ±2°		0.XXX ±0.1	ECN LS07-0211		
Appr LEGARE 2000/11/20	Product family		DIN	Spec ref -		
title: RIGHT ANGLE MALE STYLE C SOLDER TO BOARD				dwg no C-8609-0849		Rev. C
catalog no SEE TABLE				CUSTOMER	sheet 1 of 1	

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:C STATUS: Released Printed: May 14, 2011