



PRODUCT APPROVAL SHEET

Product Type	ZTTWSMG Ceramic Resonator
CREC's P/N	01.X.CR.ZZZSTSF0006000000
Description	ZTTWSMG 6.000000MHz ±0.5% -25~ 85°C
Customer Number	LBY001
Customer P/N	-
Customer Name	-
Revision	B0
Spec No.	LBY001XCR001

Drafting	ISS	CHK.(R&D)	APP.
Sign	杨静		
Date	2023/5/23	2023/5/23	2023/5/23

Process	Site	Tel	Fax	Address
Fab	Chengdu,Sichuan,China	+86-28-60238518 +86-755-83475957	+86-28-60238525 +86-755-83475977	No.8 Baiye Road,West Area of Hi-Tech Zone, Chengdu,sichuan,China
Assembly				
Test				
Web Site	www.chinacrec.com			



PRODUCT SPECIFICATION

ZTTWSMG Ceramic Resonator



【 CONTENTS 】

1 SCOPE -----	3
2 Reference Standard -----	3
3 Title Guide -----	3
4 Performance-----	4
5 Figure-----	4
5.1 Product Dimensions -----	4
5.2 Marking -----	5
6 Test Circuit-----	5
7 IR Reflow Profile -----	5
8 Reliability Test Item -----	6
9 Product handling and control procedure-----	7
9.1 Precautions for storage-----	7
9.2 Mounting of SMD Type products-----	7
9.3 Ultrasonic cleaning-----	7
9.4 Ultrasonic welding-----	7

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	2


1 SCOPE

This specification only covers CREC's 01.X.CR.ZZZSTSF0006000000

2 Reference Standard

- 2.1 MIL-STD-883H :Environmental tests' Mechanical tests.
- 2.2 MIL-STD-202 : Test Methods for Electronic and Electrical component part.
- 2.3 IEC 60068-2 :Environmental tests' Mechanical tests.
- 2.4 ANSI/EIA-481-C : 8mm through 200mm embossed carrier taping and 24mm punched
- 3.5 JEDEC J-STD-020C: Soldering

3 Title Guide

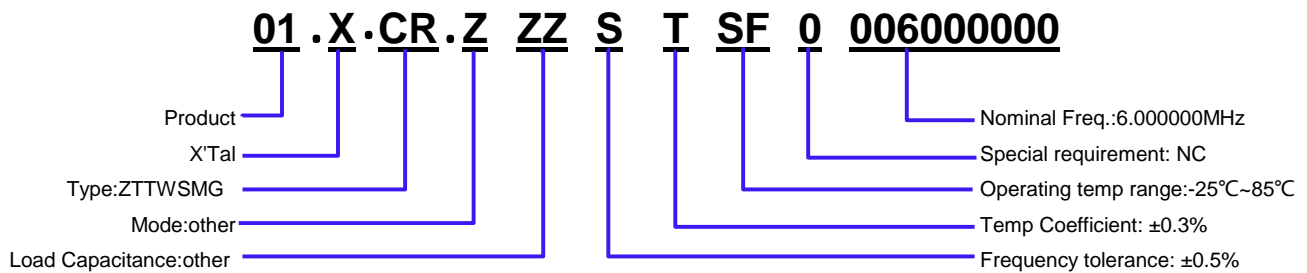

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	3


4 Performance

Electrical Performance.

No.	Item	Symb.	Electrical Specification				Requirement
			Min.	Type	Max.	Unit	
1	Oscillation Frequency Fosc	-	6.000000			MHz	-
2	Frequency Accuracy	-	-0.5	-	0.5	%	-
3	Resonant Impedance	-	-	-	30	Ω	-
4	Operating Temperature Range	T _{OPR}	-25	-	85	$^{\circ}\text{C}$	-
5	Storage Temperature	T _{stg}	-55	-	85	$^{\circ}\text{C}$	-
6	Temperature Coefficient of Oscillation Frequency	-	-0.3	-	0.3	%	-25 $^{\circ}\text{C}$ ~ +85 $^{\circ}\text{C}$
7	Aging Rate	-	-0.3	-	0.3	%	For Ten Years
8	Insulation Resistance Ri	-	100 (100V, 1min)			M Ω	-
9	Withstanding Voltage	-	50 (DC, 1min)			V	-
10	Rating Voltage UR (V) max.	-	6V DC			V	-
		-	15V p-p			V	-

5 Figure

5.1 Product Dimensions (Unit:mm)

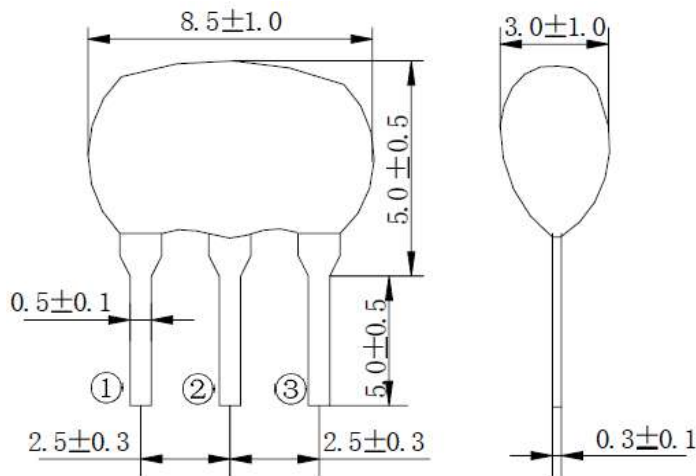


- ① Input
 - ② Ground
 - ③ Output
- * EIAJ MONTHLY CODE

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	4


5.2 Marking



6 Test Circuit

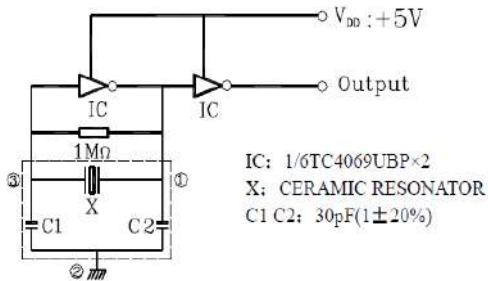

7 IR Reflow Profile

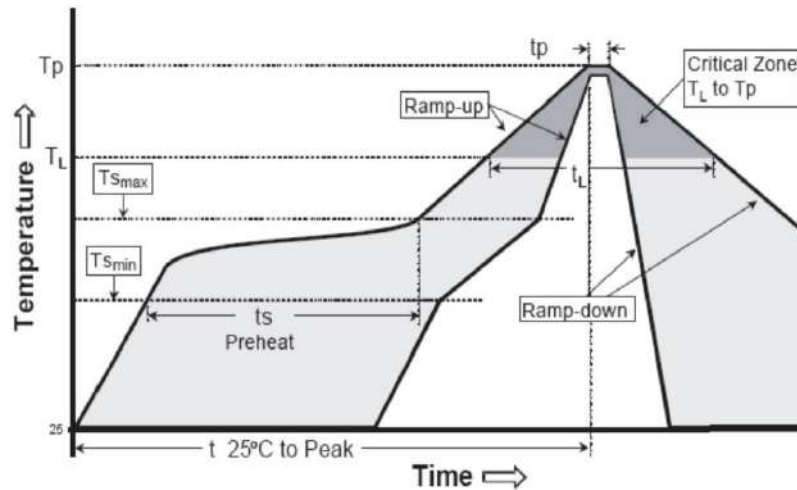

Remark: Reference JEDEC J-STD-020C

Profiles Feature	Pb-Free Assembly
Average Ramp-up Rate (Ts max to Tp)	3°C/second max.
Preheat	
■ Temperature Min (Ts min)	125°C
■ Temperature Max (Ts max)	200°C
■ Time (ts min to ts max)	60~180 seconds
Time maintained above	
■ Temperature (TL)	217°C
■ Time (tL)	60~150 seconds
Peak/Classification Temperature (Tp)	260°C
Time within 5°C of actual Peak	20~40 seconds
Temperature (tp)	
Ramp-down rate	6°C/second Max
Time 25°C to Peak Temperature	8 minutes Max
Suggest reflow times	3 times

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	5

8 Reliability Test Item

No.	Item	Test Condition	Reference
1	Drop Test	Hight: 50cm Times: 2 times on hardWood	IEC68-2-32 Free Fall
2	Vibration	Frequency: 20 to2000Hz, full wave Amplitude: 1.5 mm (Peak to Peak) Sweep/Cycle: 2 minutes Accelerated Speed: 20g Direction: X, Y,Z Duration: 4min ,4 times in each direction	IEC68-2-6 Vibration
3	Solderability	Temperature: 235±5℃ Time: 10±1 Sec	MIL-STD-202 Method 210B Condition B
4	Aging	Temperature: 100℃ Time:168 hours	MIL-STD-883H Method 1008.2
5	Fine Leak	Helium Bombing:0.4~0.5Mpa Time:1 hour	MIL-STD-883H METHOD 1014.13
6	High Temperature Storage	Temperature: 85℃ ± 5℃ Time 96 hours	IEC 60068-2-2
7	Temperature Cycle	Conditions: 25℃ ± 3℃ for 10 minutes -40℃ ± 3℃for 30 minutes 25℃ ± 3℃ for 10 minutes 125℃± 3℃ for 30 minutes 100 cycles	MIL-STD-883H METHOD 1010.8
8	Resistance to Soldering Heat	Pre-Heating:125℃ 60~120 Sec Solder temperature: 260± 5℃ Time: 20±5 sec	MIL-STD-202 Method 210B Condition B
9	Humidity	Temperature: 60℃ ± 2℃ Relative Humidity: 95% Time: 96 hours.	IEC 60068-2-3 Damp Heat
10	Thermal shock	-40℃ ± 3℃ to 100℃ ± 3℃, soak 15 minutes at each point, transfer time within 15 seconds, 20 cycles.	MIL-STD-883H METHOD 1011.9
11	Low Temperature Storage	Temperature: -40℃ ± 5℃ Time: 96 hours	IEC 60068-2-1
12	IR Reflow	Pre-Heating:150℃ to 200℃, 60-120 Sec Heating:217℃, 60 to 150 Sec Peak temp:260℃±5℃,20±5 Sec Times: 2 times	JEDEC J-STD-020C
13	Salt Spray	Temperature: 35±2℃ Salinity: 5% Time:24hrs	MIL-STD-883H Method 1009.8 Condition A

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	6

9 Product handling and control procedure

9.1 Precautions for storage

Storage of crystal units under higher temperature or high humidity for a long term may affects frequency stability or solderability. Please store the crystal units under the normal temperature and humidity without exposing to direct sunlight and dew condensation, and avoid the storage of crystal units for more than 6 months, and mount them as soon as possible after unpacking.

Item		Electrical Specification			
		Min.	Type	Max.	Unit
Storage peiod	After customer assembly	15		-	Year
	Crystal unused	-		2	Year

9.2 Mounting of SMD Type products

When using an automatic loading machine, please test and confirm to cause no damage to the crystal units before mounting. Bending the circuit board in the process of cleaving boards after mounting and soldering crystal units may cause peeling off the soldering or package cracks by mechanical stress.

9.3 Ultrasonic cleaning

General cleaning solutions or ultrasonic cleaning method may be used to clean CREC's products. However, under certain circumstances, ultrasonic cleaning machine could generate resonance at the oscillaton frequency of our products and thus deteriorate the electrical characteristics in devices, and even damage the overall structure of devices. Therefore, verification test is recommended before cleaning.

9.4 Ultrasonic welding

Avoid mounting and processing by Ultrasonic welding this method has a possibility of an excessive vibration spreading inside the crystal products and becoming the cause of characteristic deterioration and not oscillating. If Ultrasonic welding is being used in process, please notify us in advance to verify it.

Rev	CREC's P/N	Cust P/N	Page
B0	01.X.CR.ZZZSTSF0006000000	-	7