

Keyword:
Standard Use and
Stand-By





Type: **SL-350**

Performance Data **Size ½AA**
 (Typical values for batteries stored at 25 °C for one year)




System	Li/SOCl ₂
Nominal capacity	1.0 Ah
Nominal voltage	3.6 V
Nominal current	0.6 mA
Max. continuous discharge current	6 mA
Anode surface area	6 cm ²
Weight	9 g
Volume	4.3 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


Typical Discharge Curves at +25 °C

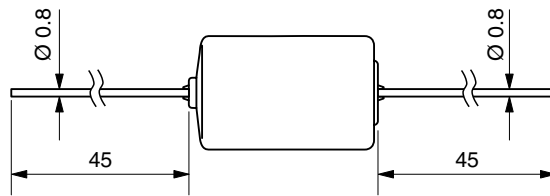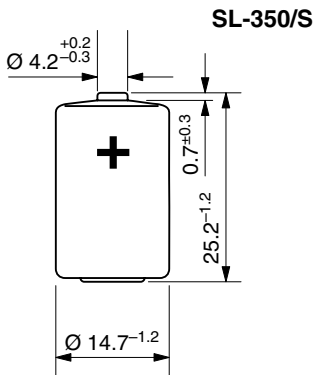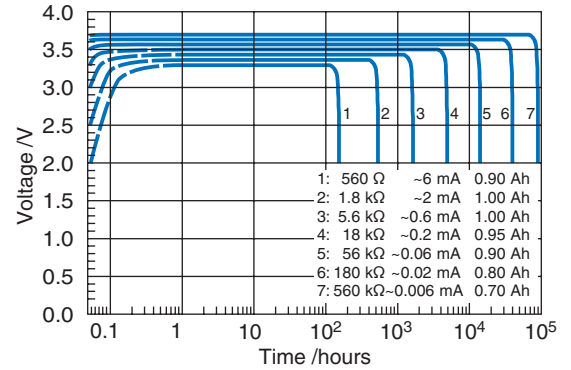

Available Capacity

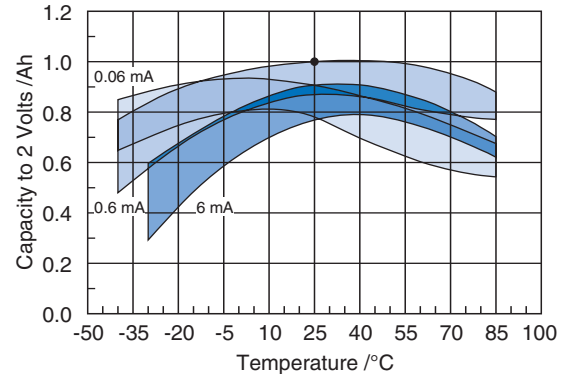

Operating Voltage

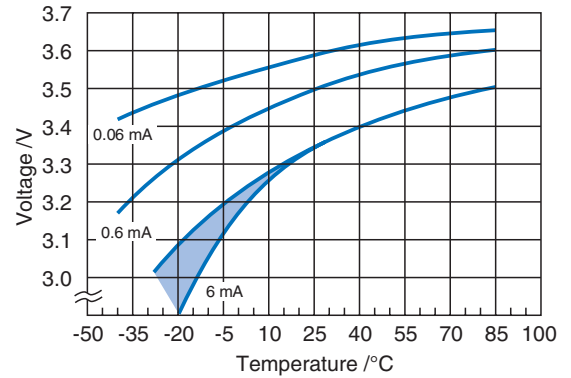

Available Terminations

SL-350/S	Standard
SL-350/T	Tags
SL-350/P	Pins
SL-350/PR	Pins Radial
SL-350/PT	Polarized Tags

Catalogue No.

11 1 03501 00
11 1 03502 00
11 1 03503 00
11 1 03506 00
11 1 03508 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.