


## CDBJSC3650-G

Reverse Voltage: 650 V

Forward Current: 3 A



RoHS Device



### Features

- Rated to 650V at 3 Amps
- Short recovery time.
- High speed switching possible.
- High frequency operation.
- High temperature operation.
- Temperature independent switching behaviour.
- Positive temperature coefficient on VF.

### Circuit diagram

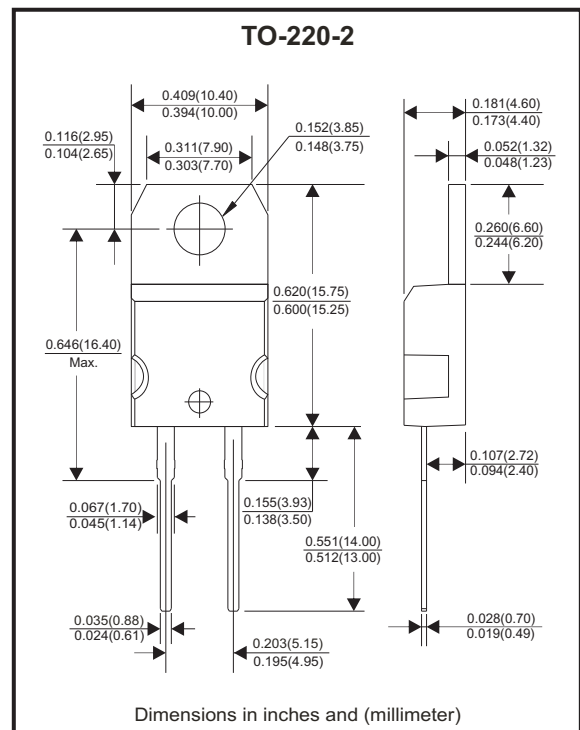

### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Repetitive peak reverse voltage		V <sub>RRM</sub>	650	V
Surge peak reverse voltage		V <sub>RSM</sub>	650	V
DC blocking voltage		V <sub>DC</sub>	650	V
Typical Continuous forward current	T <sub>c</sub> = 150°C	I <sub>F</sub>	3	A
Repetitive peak forward surge current	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10ms Half sine wave, D = 0.3	I <sub>FRM</sub>	15	A
Non-repetitive peak forward surge current	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10ms Half sine wave	I <sub>FSM</sub>	30	A
Power dissipation	T <sub>c</sub> = 25°C	P <sub>TOT</sub>	53.2	W
	T <sub>c</sub> = 110°C		23	
Typical thermal resistance	Junction to case	R <sub>θJC</sub>	2.82	°C/W
Operating junction temperature range		T <sub>J</sub>	-55 ~ +175	°C
Storage temperature range		T <sub>STG</sub>	-55 ~ +175	°C

## Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Typ	Max	Unit
Forward voltage	$I_F = 3\text{ A}, T_J = 25^\circ\text{C}$	$V_F$	1.41	1.7	V
	$I_F = 3\text{ A}, T_J = 175^\circ\text{C}$		1.8		
Reverse current	$V_R = 650\text{ V}, T_J = 25^\circ\text{C}$	$I_R$	10	100	$\mu\text{A}$
	$V_R = 650\text{ V}, T_J = 175^\circ\text{C}$		20		
Total capacitive charge	$V_R = 400\text{ V}, T_J = 150^\circ\text{C}$ $Q_C = \int_0^{V_R} C(V) dv$	$Q_C$	11		nC
Total capacitance	$V_R = 0\text{ V}, T_J = 25^\circ\text{C}, f = 1\text{ MHz}$	C	190		pF
	$V_R = 200\text{ V}, T_J = 25^\circ\text{C}, f = 1\text{ MHz}$		23		

## Typical Characteristics (CDBJSC3650-G)

Fig.1 - Forward Characteristics

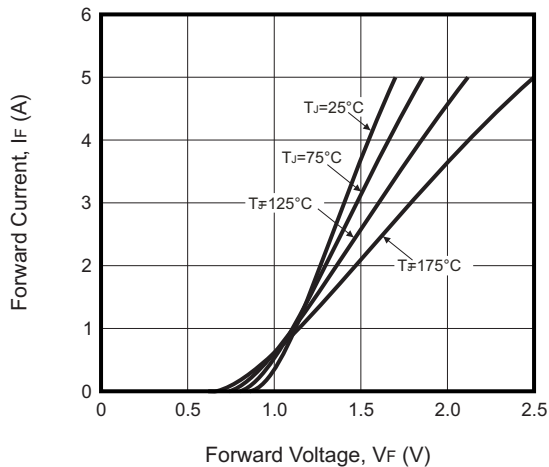


Fig.2 - Reverse Characteristics

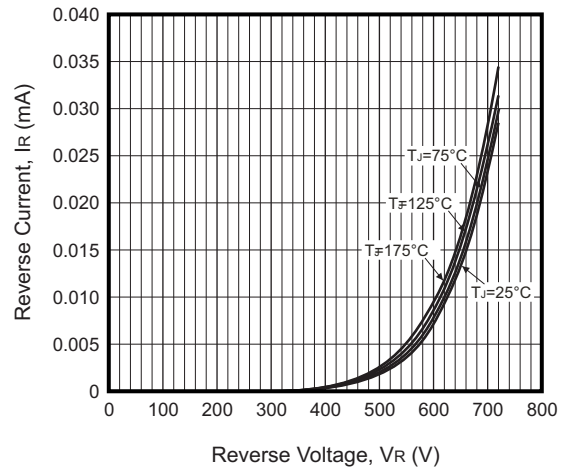


Fig.3 - Current Derating



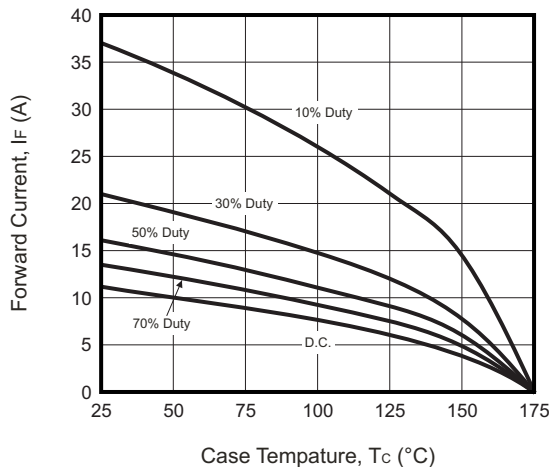


Fig.4 - Capacitance vs. Reverse Voltage

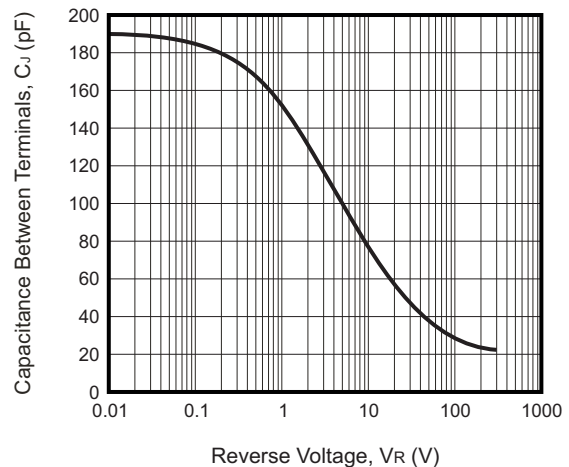

## Marking Code

Part Number	Marking Code
CDBJSC3650-G	JSC3650

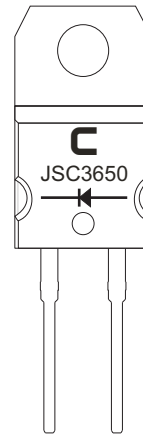

## Standard Packaging

Case Type	TUBE PACK	
	TUBE ( pcs )	BOX ( pcs )
TO-220-2	50	1,000

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[CDBJSC3650-G](#)