

June 2015

Multilayer Low Pass Filter

For 2400-2500MHz

DEA162500LT-1217A1

1.6x0.8mm [EIA 0603]*

* Dimensions Code JIS[EIA]


Multilayer Low Pass Filter For 2400-2500MHz

公TDK

DEA162500LT-1217A1


SHAPES AND DIMENSIONS

[Top view]





[Bottom view]




Terminal functions				
1	GND			
2	IN			
3	GND			
4	GND			
5	OUT			
6	GND			


Dimensions in mm

Dimensions in mm

RECOMMENDED LAND PATTERN



EVALUATION BOARD



O RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

• All specifications are subject to change without notice.

• Before using these products, be sure to request the delivery specifications.

DEA162500LT-1217A1

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	2400 to 2500	—	0.35	0.48
Return Loss (dB)	2400 to 2500	14	17.5	—
Attenuation (dB)	4800 to 5000	35	50.0	_
Attenuation (dB)	7200 to 7500	25	32.0	—
Power Handling (W)	2400 to 2500	—	—	1
Characteristic Impedance (Ω)	50 (Nominal)			

• Ta: +25±5°C

TEMPERATURE RANGE

Operating temperature	Storage temperature	
(° C)	(°C)	
-40 to +85	-40 to +85	


• All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.


DEA162500LT-1217A1


FREQUENCY CHARACTERISTICS





RETURN LOSS




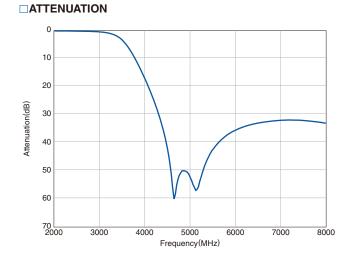

• All specifications are subject to change without notice.

• Before using these products, be sure to request the delivery specifications.

RECOMMENDED REFLOW PROFILE

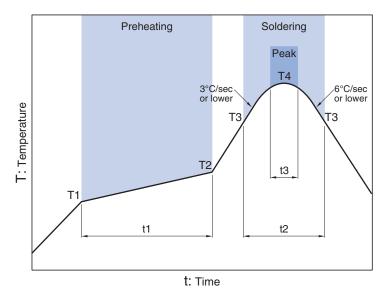

Soldering Preheating Critical zone (T3 to T4) Peak Temp. Time Temp. Time Temp. Time T1 T2 **T**4 t1 ТЗ t2 t3* 150°C 200°C 60 to 120sec 217°C 60 to 120sec 240 to 260°C 30sec max.

 * t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

• All specifications are subject to change without notice.

• Before using these products, be sure to request the delivery specifications.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

▲ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

· All specifications are subject to change without notice.

[·] Before using these products, be sure to request the delivery specifications.