
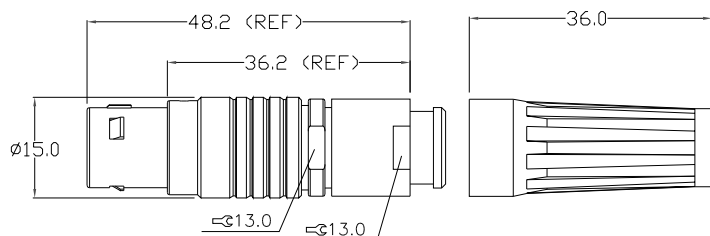


DESCRIPTION: 2B // QUIK-LOQ // M // CABLE MOUNT // SOLDER CUP



**822BYYY-173LYY1**

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 YYY = SEE POSITION CHART  
 GENDER \_\_\_\_\_  
 1 = MALE  
 TYPE \_\_\_\_\_  
 7 = CABLE MOUNT  
 KEY ORIENTATION (SEE KEY ORIENTATION CHART) \_\_\_\_\_  
 3 = 1 KEY // 0°  
 A = 2 KEYS // 30°  
 COLLET SIZE \_\_\_\_\_  
 YY = SEE COLLET SIZE CHART  
 CONTACT PLATING \_\_\_\_\_  
 1 = 7μ" GOLD PLATED

KEY ORIENTATION CHART	
KEY ORIENTATION	DIAGRAM
3	
A	

COLLET SIZE CHART	
COLLET SIZE:	CABLE DIAMETER:
50	4.30 ~ 5.20
60	5.30 ~ 6.20
70	6.30 ~ 7.20
80	7.30 ~ 8.20
90	8.30 ~ 9.20
00	9.30 ~ 10.20

**SPECIFICATIONS:**

**MATERIALS:**

SHELL & COLLET NUT: BRASS, 196u" CHROME PLATED MIN.  
 CONTACTS: 7u" GOLD PLATED BRASS OVER 196u" NICKEL MIN.  
 INSULATOR: PPS (HIGH TEMPERATURE)  
 STRAIN RELIEF (BOOT): THERMOPLASTIC POLYURETHANE

**MECHANICAL:**

MATING CYCLES: 5000 CYCLES  
 OPERATING TEMPERATURE: -40°C TO +200°C  
 PROCESS TEMPERATURE: 260°C FOR 5 SECONDS  
 SHIELDING: 75dB @ 10MHz // 40dB @ 1GHz  
 IP RATING: 50  
 MAX TORQUE VALUE: 2.5 Nm

POSITION CHART // ELECTRICAL/WIRE SPECIFICATIONS

\*solder side view of insulator

POSITIONS	CONTACTS*	CONTACT Ø	MAX CONTACT mΩ	WORKING VOLTAGE	MAX AMPERAGE	MAX WIRE AWG
002		2.00mm	3.0 mΩ	700 V	12.0 A	16
003		1.60mm	4.0 mΩ	800 V	12.0 A	18
004		1.30mm	5.0 mΩ	610 V	12.0 A	20
006		1.30mm	5.0 mΩ	450 V	12.0 A	20
008		0.90mm	6.0 mΩ	500 V	6.0 A	22
010		0.90mm	6.0 mΩ	500 V	6.0 A	22
012		0.70mm	7.5 mΩ	480 V	6.0 A	24
014		0.70mm	7.5 mΩ	380 V	6.0 A	24
016		0.70mm	7.5 mΩ	315 V	6.0 A	24
019		0.70mm	7.5 mΩ	315 V	5.0 A	24
026		0.50mm	10.0 mΩ	315 V	2.0 A	28

UNITS = mm

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
M. SIGMON

DATE:  
02/03/2016

NorComp

SCALE:  
NTS

SHEET OF  
1 1

REV  
9

DWG NO.

822BYYY-173LYY1