
# Pomona®

## Model 5170 Do-It-Yourself In-Line Banana Plug With Flexible Boot

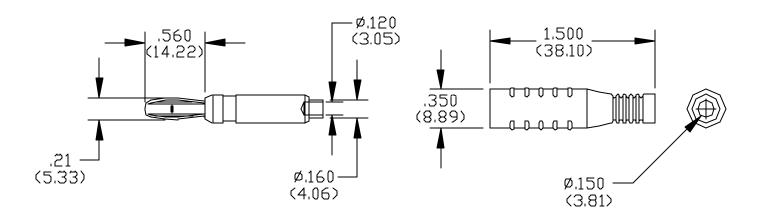

#### **FEATURES:**

- Ideal for making test cables and field repairs.
- Use with Model #5168 Banana Jack to make extensin cables
- Part will accept 14, 16 AWG wire, crimp or solder connection.
- Snap-on two piece design allows the wire to be crimped or soldered.

#### **MATERIALS:**

In-Line Banana Plug

Plug Body: Brass per QQ-B-626, Alloy 360, <sup>1</sup>/<sub>2</sub> Hard.
Spring: Beryllium Copper per ASTM B194. Alloy 172, Cond. HT.
Insulation: Flexible PVC.
Marking: "POMONA"
Finish: Banana Plug – Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

**RATINGS:** (Independent of Wire)

Operating Temperature: +50°C. (+122°F.) Max.

Working Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 5000 WVDC Max.

Current: 15 Amperes

### **ORDERING INFORMATION:** Model 5170-\*

\*=Color, -0 Black, -2 Red

Ordering Example: 5170-0, Color is Black

Colors other than those specified are available on request.

All dimensions are in inches. Tolerances (except noted):  $xx = \pm .02$ " (,51 mm),  $xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 6/9/99
 Sales: 800-490-2361
 Fax: 888-403-3360

 SY/EH/LS
 Technical Assistance: 800-241-2060

 C:\Laura Goldberg\FlukeDataSheet\d5170\_1\_01.doc