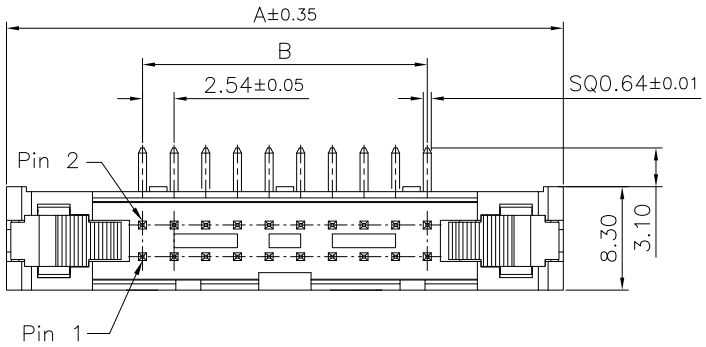

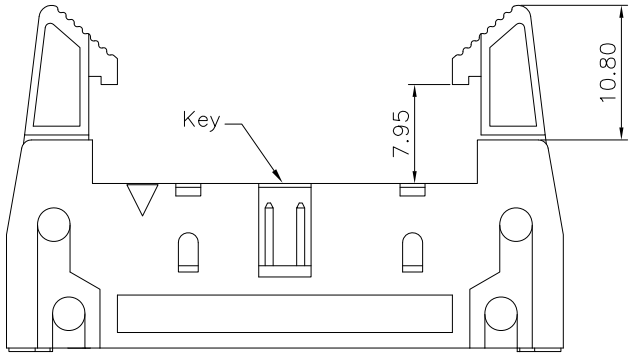

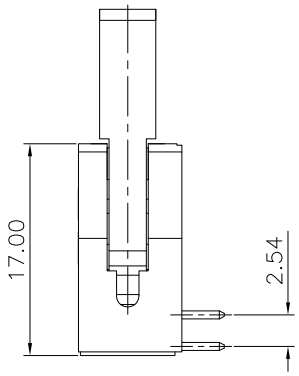

MATING PART
3030-XX-0103-00



MATING PART
3030-XX-0104-00



Specifications
Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. Max
Insulation Resistance:1000M ohm. Min
Withstanding Voltage:600V AC For one minute
Operating Temperature Range : −40°C to +105°C

Material:
Plastic:PBT (UL94V−0)
Standard Color:Black
Contact:Copper Alloy
Plating:Gold Plated

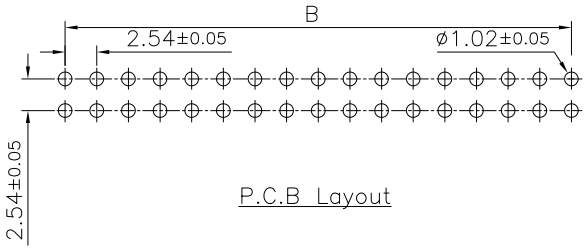

P.C.B Layout

Notes:
60P、64P With Three Key
All Other Pin With One Key

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
10	32.20	10.16	30	57.60	35.56
14	37.28	15.24	34	62.68	40.64
16	39.82	17.78	40	70.30	48.26
20	44.90	22.86	50	83.00	60.96
24	49.98	27.94	60	95.70	73.66
26	52.52	30.48	64	100.78	78.74

RoHS Compliant

REV	DATE	FILE	BY
	05-FEB-2020		

DRAWN:
CHECKED:
APPROVAL:

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15
UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
2.54mm Shrouded Header With Ejector R/A Type

PART NO:
3010-XX-002-13-00

SIZE
A4

Downloaded from Arrow.com.