

You are here: Products » Heatsinks f.cool » Profile heatsinks and fluid coolers » Extruded heatsinks for PCB mounting » SK 129 ... STSSK 129 ... STISSK 129 ... STISB » **SK 129 25,4**



▼ Heatsinks f.cool


- ▼ Profile heatsinks and fluid coolers
 - Standard extruded heatsinks
 - Extruded heatsinks for lock-in retaining spring
 - Extruded heatsinks for PCB mounting
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- ▶ Heatsinks and active heatsinks for processors
- ▶ Board Level heatsinks
- ▶ Cooling aggregates
- ▶ Accessories for electronic components
- ▶ Cases f.case
- ▶ Connectors f.con

Extruded heatsinks for PCB mounting

SK 129 ... STS
SK 129 ... STIS
SK 129 ... STSB

SK 129 25,4 STS
 42 x 25 mm, for semiconductor screw-mounting

[Data sheet](#) [add to request](#) 

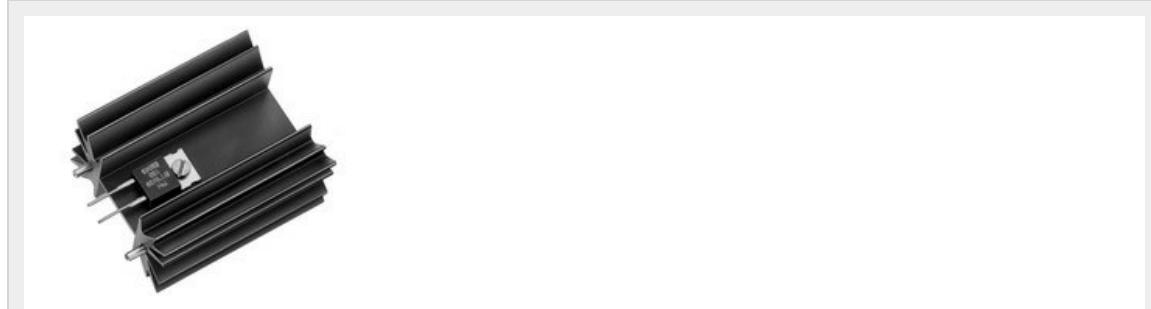

[Features](#) [Technical Drawing](#) [Variants](#) [Service](#) [Accessories / related products](#)

