


Single Phase Rectifier Bridge, 2 A

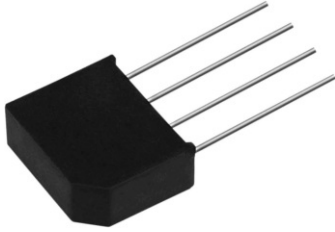

D-44

FEATURES

- Suitable for printed circuit board mounting
- Compact construction
- High surge current capability
- RoHS compliant



DESCRIPTION

A 2 A single phase encapsulated bridge rectifier consisting of four single diodes connected as a full bridge. They are intended for general applications in industrial and consumer equipment.

PRODUCT SUMMARY

I_o	2 A
V_{RRM}	50 to 1000 V

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNITS
I_o		2.0	A
I_{FSM}	50 Hz	60	A
	60 Hz	63	
I^2t	50 Hz	18	A^2s
	60 Hz	16	
V_{RRM}		50 to 1000	V
T_J		- 40 to 150	$^{\circ}C$

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS

PART NUMBER	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE (V)	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE (V)	V_{RMS} , MAXIMUM RECOMMENDED RMS SUPPLY VOLTAGE (V)
2KBP005	50	50	20
2KBP02	200	200	80
2KBP04	400	400	125
2KBP06	600	600	250
2KBP08	800	800	380
2KBP10	1000	1000	500

FORWARD CONDUCTION						
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum DC output current	I_O	$T_A = 50\text{ }^\circ\text{C}$, resistive or inductive load		2.0	A	
		$T_A = 50\text{ }^\circ\text{C}$, capacitive load		1.8		
Maximum peak one cycle, non-repetitive surge current	I_{FSM}	$t = 10\text{ ms}$, 20 ms	Following any rated load condition and with rated V_{RRM} reapplied	60	A	
		$t = 8.3\text{ ms}$, 16.7 ms		63		
Maximum I^2t capability for fusing	I^2t	$t = 10\text{ ms}$	100 % V_{RRM} reapplied	Initial $T_J = T_J$ maximum	A ² s	
		$t = 8.3\text{ ms}$				18
		$t = 10\text{ ms}$	No voltage reapplied			16
		$t = 8.3\text{ ms}$				26
Maximum $I^2\sqrt{t}$ capability for fusing	$I^2\sqrt{t}$	$t = 0.1\text{ to }10\text{ ms}$, no voltage reapplied		23	A ² \sqrt{s}	
Maximum peak forward voltage per diode	V_{FM}	$I_{FM} = 1\text{ A}$, $T_J = 25\text{ }^\circ\text{C}$		255	A ² \sqrt{s}	
Typical peak reverse leakage current per diode	I_{RM}	$T_J = 25\text{ }^\circ\text{C}$, 100 % V_{RRM}		1.0	V	
		$T_J = 150\text{ }^\circ\text{C}$, 100 % V_{RRM}		10	μA	
Operating frequency range	f			1.0	mA	
				40 to 1000	Hz	

THERMAL AND MECHANICAL SPECIFICATIONS			
PARAMETER	SYMBOL	VALUES	UNITS
Operating junction and storage temperature range	T_J, T_{Stg}	- 40 to 150	$^\circ\text{C}$
Approximate weight		4	g
		0.14	oz.

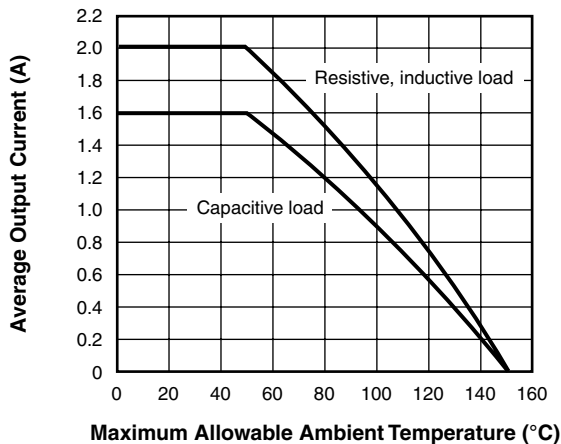


Fig. 1 - Ambient Temperature Ratings


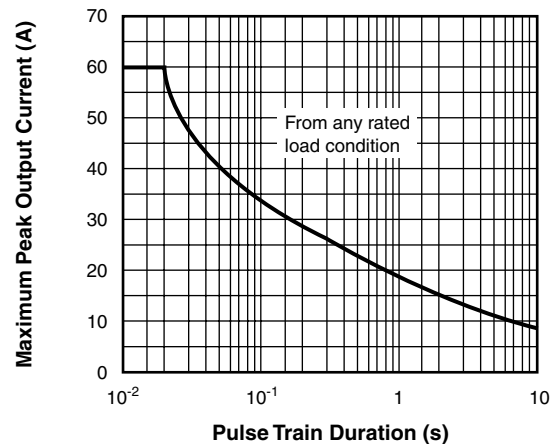


Fig. 2 - Non-Repetitive Surge Ratings



CIRCUIT CONFIGURATION

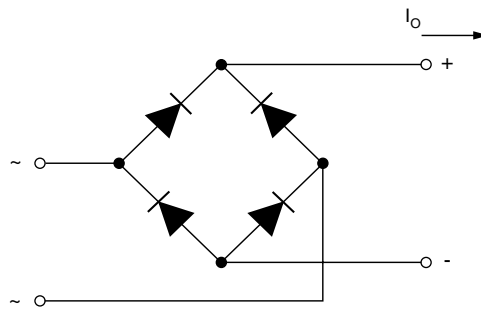

LINKS TO RELATED DOCUMENTS	
Dimensions	http://www.vishay.com/doc?95329



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.