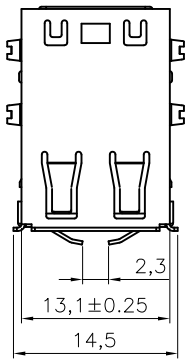

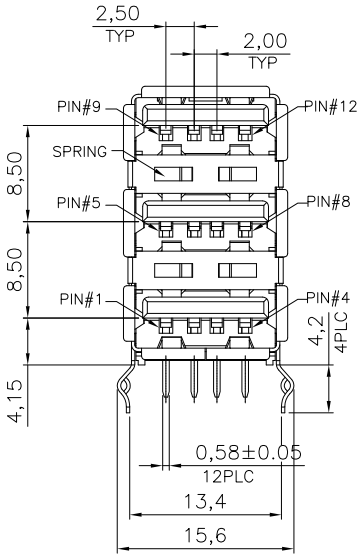

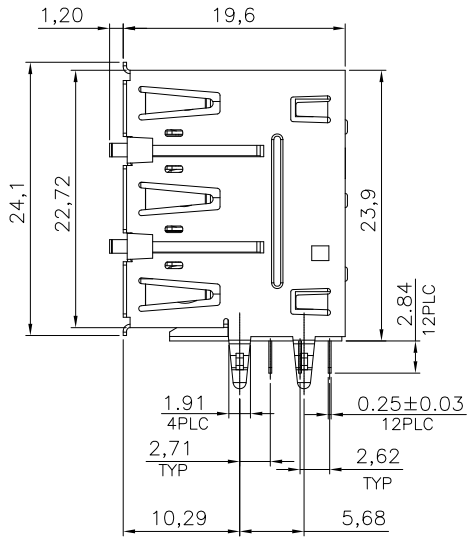



Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:30m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:750V AC For One Minute
Operating Temperature Range:−40°C ~ +105°C
Material and Finish
Insulator:PBT(UL94V−0)
Insulator Color:Black
Contact:Brass
Plating:Gold Flash Plated On Contact Area,
Tin Plated On Solder Tail.
Shell:Brass Nickel Plated

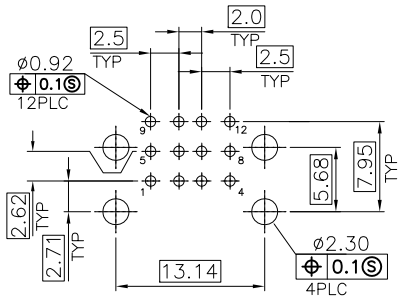

PCB layout
TOLERANCE: ±0.05

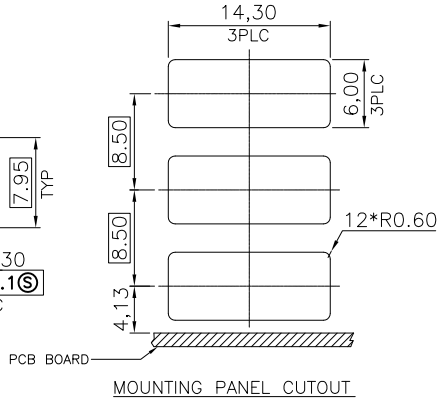

MOUNTING PANEL CUTOUT

RoHS Compliant

REV	DATE	FILE	BY
	05−FEB−2020		

DRAWN:
CHECKED:
APPROVAL:

GENERAL TOLERANCE:
.X=±0.25
.XX=±0.20
UNIT: MM
SCALE:1:1
SHEET: 1 / 2
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB A Type PCB Socket Right Angle,G/F

PART NO:
1001-007-01020

SIZE
A4