



RClamp[®]0554S

KEY FEATURES

- High surge immunity: $I_{pp}=25A, 8x20\mu s$
- 4-line protection array
- Superior clamping voltage
- Low capacitance: 5pF
- Small package (SOT-23L)

BENEFITS

- Protection for lightning, ESD and Cable Discharge
- Ideal for protecting two differential pairs
- Protects sensitive next generation transceivers
- Provides minimal loading to preserve signal integrity
- Footprint compatible with SRV05-4

APPLICATIONS

- USB 2.0 Power and Data Line Protection
- 10/100/1000 Ethernet
- Video Graphics Cards
- Monitors and Flat Panel Displays
- Digital Video Interface (DVI)
- Notebook Computers
- IEEE 1394 Firewire Ports


PACKAGING

- JEDEC SOT-23 6L



Low Clamping Performance TVS Array for ESD, Cable Discharge & Surge Protection

The RClamp[®]0554S's unique design incorporates eight surge rated, low capacitance steering diodes and a TVS diode in a single package. During transient conditions, the steering diodes direct the transient to either the positive side of the power supply line or to ground. The internal TVS diode prevents over-voltage on the power line, protecting any downstream components.

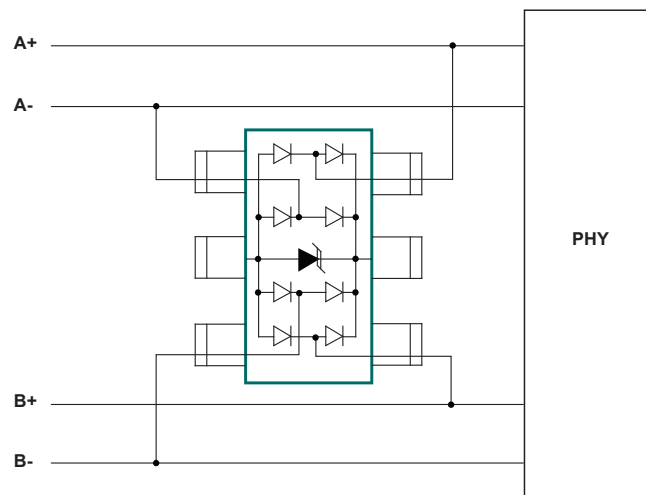



RClamp[®]0554S

| RClamp® 0554S - Absolute Maximum Rating | | | |
|--|-----------|-------------|-------|
| Maximum Rating | Symbol | Value | Unit |
| Peak Pulse Power (tp = 8/20us) | P_{pk} | 375 | Watts |
| Peak Pulse Power (tp = 8/20μs) | I_{pp} | 25 | A |
| ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | V_{ESD} | ±30 ±25 | kV |
| Operating Temperature | T_j | -55 to +125 | ° C |
| Storage Temperature | T_{STG} | -55 to +150 | ° C |

| Electrical Characteristics (T=25°C) | | | | | | |
|-------------------------------------|-----------|---------------------------------------|-----|-----|-----|-------|
| Parameter | Symbol | Condition | Min | Typ | Max | Units |
| Reverse Stand-Off Voltage | V_{RWM} | | | | 5 | V |
| Reverse Breakdown Voltage | V_{BR} | | 6 | | | V |
| Reverse Leakage Current | I_R | $V_{RWM} = 5V, T = 25 ° C$ | | | 0.5 | μA |
| Clamping Voltage | V_C | $I_{pp} = 25A, tp = 8/20μs$ | | | 15 | V |
| Junction Capacitance | C_j | Any I/O to Gnd $V_R = 0, f = 1MHz$ | | | 5 | pF |
| | | I/O to I/O $V_R = 0, f = 1MHz$ | | 3 | | pF |

**ESD CLAMPING
(8KV CONTACT PER IEC 61000-4-2)**

**SURGE CLAMPING
(TP = 8/20μS)**

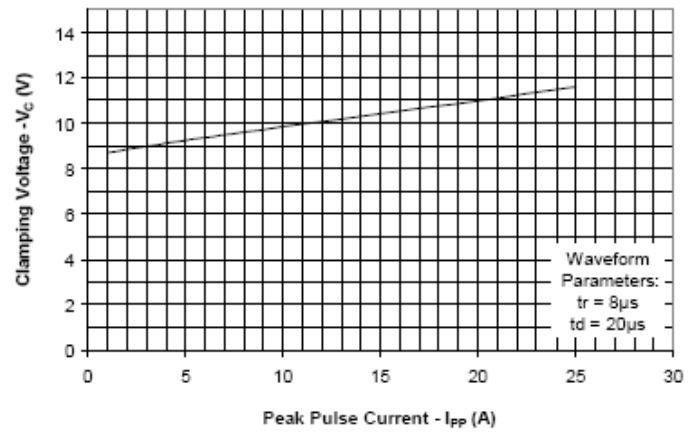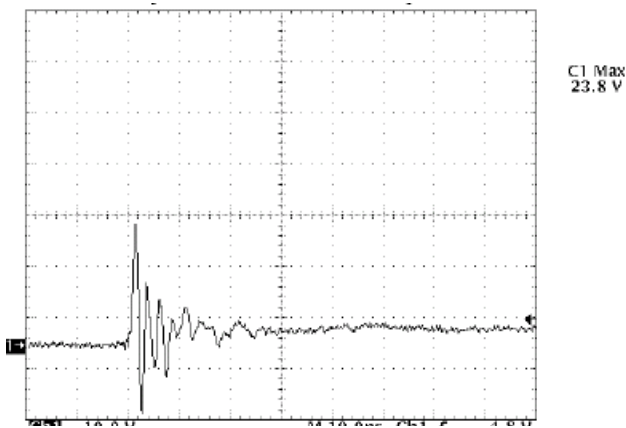

ORDERING INFORMATION

| RClamp0554S.TCT | | |
|-----------------|--------------|-----------|
| Working Voltage | Qty Per Reel | Reel Size |
| 5V | 3,000 | 7 inches |



200 Flynn Road, Camarillo, California 93012 • phone: (805) 498-2111 • fax: (805) 498-3804

Semtech, the Semtech logo and RClamp are registered marks of Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. ©2017 Semtech Corporation. All rights reserved. RC0554S-PB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[RCLAMP0554S.TCT](#)