



Silicon Variable Capacitance Diodes

- For FM radio tuners with extended frequency band
- High tuning ratio at low supply voltage (car radio)
- Monolithic chip (common cathode) for perfect dual diode tracking
- Coded capacitance groups and group matching available
- Pb-free (RoHS compliant) package

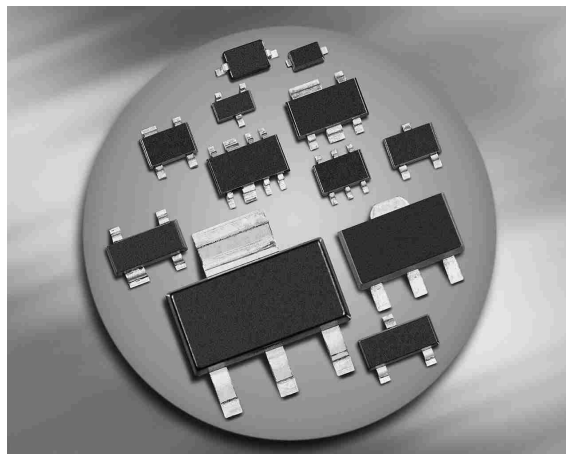

BB814



| Type | Package | Configuration | L_S (nH) | Marking |
|-------|---------|----------------|------------|---------|
| BB814 | SOT23 | common cathode | 1.8 | SH1/2* |

*For differences see next page Capacitance groups

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Value | Unit |
|-----------------------------|-----------|-------------|------------------|
| Diode reverse voltage | V_R | 18 | V |
| Peak reverse voltage- | V_{RM} | 20 | |
| Forward current | I_F | 50 | mA |
| Operating temperature range | T_{op} | -55 ... 125 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55 ... 150 | |

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | | Unit |
|---|------------------|-------------|---------------|---------------|----------|
| | | min. | typ. | max. | |
| DC Characteristics | | | | | |
| Reverse current $V_R = 16\text{ V}$ $V_R = 16\text{ V}, T_A = 60\text{ }^{\circ}\text{C}$ | I_R | - - - | - - - | 20 200 | nA |
| AC Characteristics | | | | | |
| Diode capacitance ¹⁾ $V_R = 2\text{ V}, f = 1\text{ MHz}$ $V_R = 8\text{ V}, f = 1\text{ MHz}$ | C_T | 43 19.1 | 44.75 20.8 | 46.5 22.7 | pF |
| Capacitance ratio $V_R = 2\text{ V}, V_R = 8\text{ V}, f = 1\text{ MHz}$ | C_{T2}/C_{T8} | 2.05 | 2.15 | 2.25 | |
| Capacitance matching ²⁾ $V_R = 2\text{ V}, V_R = 8\text{ V}, f = 1\text{ MHz}$ | $\Delta C_T/C_T$ | - | - | 3 | % |
| Series resistance $V_R = 2\text{ V}, f = 100\text{ MHz}$ | r_S | - | 0.18 | - | Ω |
| Q factor $f = 100\text{ MHz}, V_R = 2\text{ V}$ | Q | - | 200 | - | |


¹Capacitance groups at 2V and 8V, coded 1; 2

| | | |
|---------------|---------|---------|
| C_T /groups | 1 | 2 |
| C_{2V} min | 43pF | 44.5pF |
| C_{2V} max | 45pF | 46.5pF |
| C_{8V} min | 19.1pF | 19.75pF |
| C_{8V} max | 21.95pF | 22.7pF |

²For details please refer to Application Note 047.


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

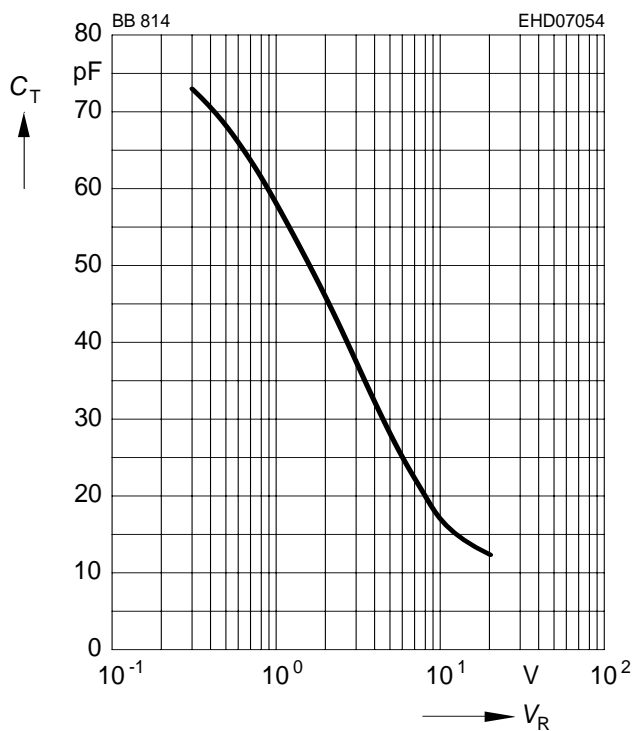


Capacitance ratio $C_{Tref}/C_T = f(V_R)$

$f = 1\text{MHz}$

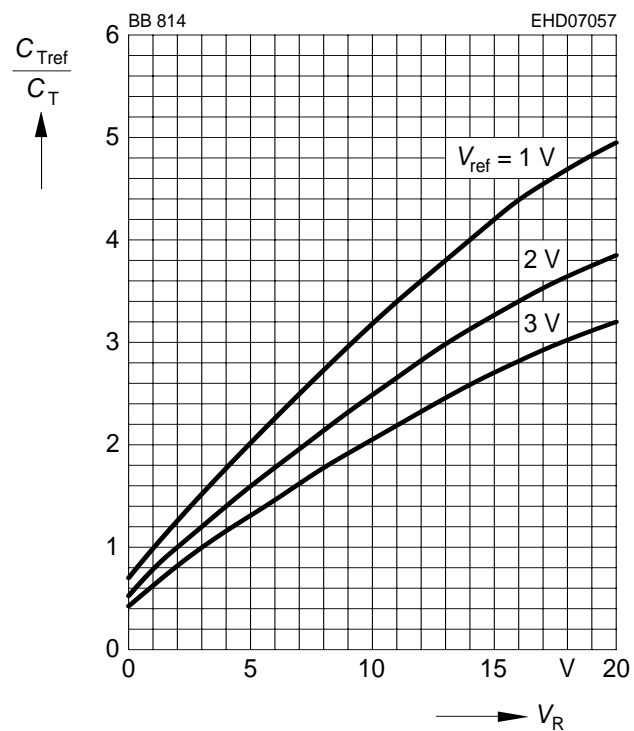


Package Outline

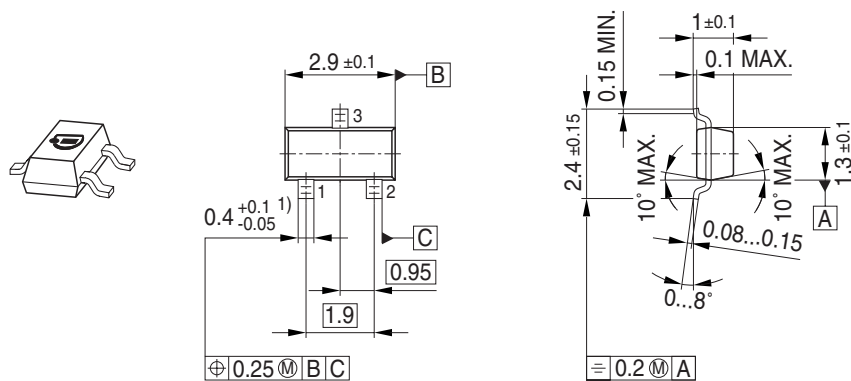


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

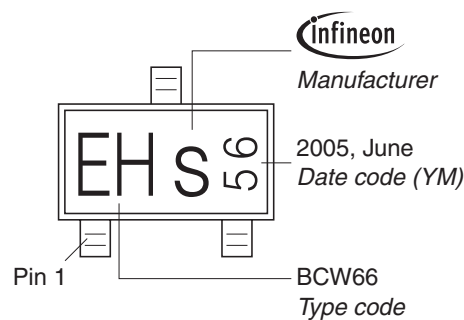

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

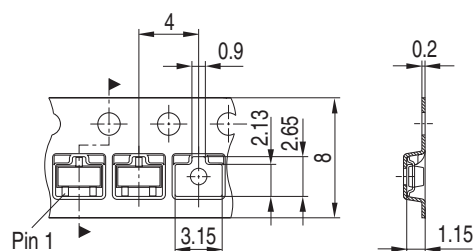

Edition 2009-11-16

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[BB 814 E6327 GR1](#) [BB 814 E6327 GR2](#) [BB 814 B6327 GR1](#) [BB 814 E6433 GR1](#)