

## ASA Series 6 Watts

### Data Sheet

**Total Power:** 6 Watts  
**Input Voltage:** 12 V, 24 V or 48 V  
**# of Outputs:** Single, Dual

### SPECIAL FEATURES

- Encapsulated
- Wide 4:1 input range
- 1.25" x 0.8" DIP package
- 1500 Vdc I/O isolation
- Single and Dual output

### SAFETY

- UL 60950-1
- CE Mark



### Electrical Specifications

Input	
Input range:	9 to 36 VDC; 18 to 75 VDC
Efficiency <sup>2</sup> :	81% @ 5 Vo
Output	
Voltage tolerance:	±2.0%
Line regulation:	±0.5%
Load regulation:	Single output: 1% @ 3.3 Vo Other: ±0.5% Dual output: ±3.0%
Noise/ripple:	3.3 Vo, 5 Vo: 100 mV 12 Vo: 120 mV 15 Vo: 150 mV
Short circuit protection:	Auto-restart
Switching frequency:	250 KHz
Temperature coefficient:	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.
Insulation resistance:	10 Mohm
Insulation capacitance:	1000 pF

### Environmental Specifications

<b>Operating ambient temperature range:</b>	-40 °C to +71°C (no derating)
<b>Storage temperature:</b>	-55 °C to +105 °C
<b>Humidity:</b>	5% to 95% (non-condensing)
<b>MTBF:</b>	1 Mhrs demonstrated MTBF
<b>RoHS Compliant</b>	


### Ordering Information

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
ASA01F18-LS	9 - 36 V	3.3 V @ 1.2 A		3.96 W
ASA01A18-LS	9 - 36 V	5 V @ 1.00 A		5 W
ASA00B18-LS	9 - 36 V	12 V @ 0.50 A		6 W
ASA00C18-LS	9 - 36 V	15 V @ 0.40 A		6 W
ASA00AA18-LS	9 - 36 V	5 V @ 0.50 A	-5 V @ 0.5 A	5 W
ASA00BB18-LS	9 - 36 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA00CC18-LS	9 - 36 V	15 V @ 0.20 A	-15 V @ 0.20 A	6 W
ASA01F36-LS	18 - 75 V	3.3 V @ 1.2 A		3.96 W
ASA01A36-LS	18 - 75 V	5 V @ 1.00 A		5 W
ASA00B36-LS	18 - 75 V	12 V @ 0.50 A		6 W
ASA00C36-LS	18 - 75 V	15 V @ 0.40 A		6 W
ASA00AA36-LS	18 - 75 V	5 V @ 0.50 A	-5 V @ 0.5 A	5 W
AEE00BB36-LS	18 - 75 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA00CC36-LS	18 - 75 V	15 V @ 0.20 A	-15 V @ 0.20 A	6 W

Please contact Artesyn Embedded Technologies for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.

### Mechanical Drawings

#### Single Output

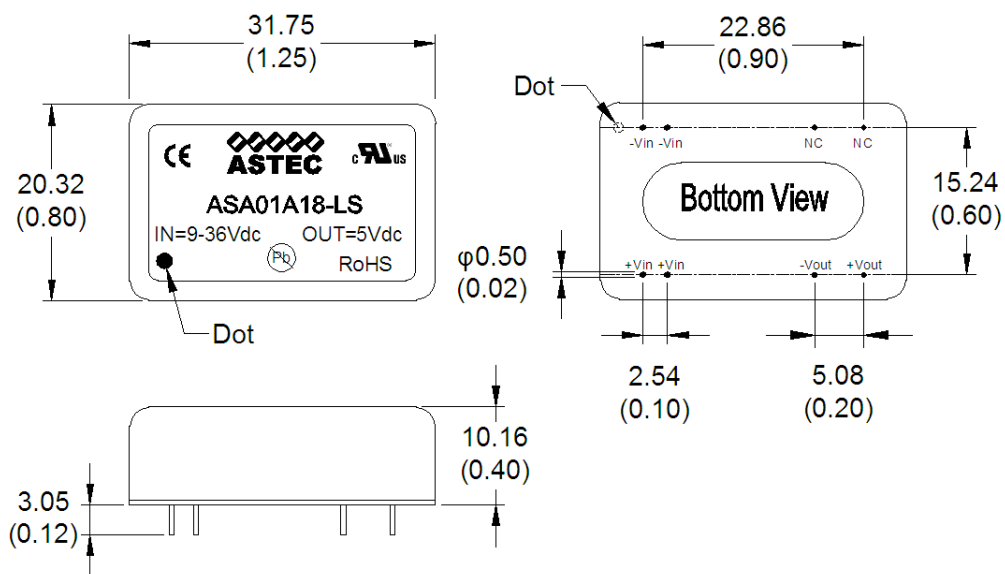

## Mechanical Drawings

### Dual Output



#### Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333

**ARTESYN**<sup>™</sup>  
 EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
 © 2014 All rights reserved.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)