


## 2-wire programmable transmitter

### 6334A



- TC input
- High measurement accuracy
- Galvanic isolation
- Programmable sensor error value
- 1- or 2-channel version

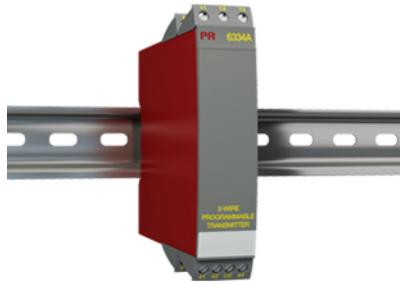

#### Application

- Linearized temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal, optionally linearized according to a defined linearization function.


#### Technical characteristics

- Within a few seconds the user can program PR6334A to measure temperatures within all TC ranges defined by the norms.
- Cold junction compensation (CJC) with a built-in temperature sensor.
- A limit can be programmed on the output signal.
- Continuous check of vital stored data for safety reasons.

#### Mounting / installation

- Mounted vertically or horizontally on a DIN rail. Using the 2-channel version up to 84 channels can be mounted per meter.

#### Applications

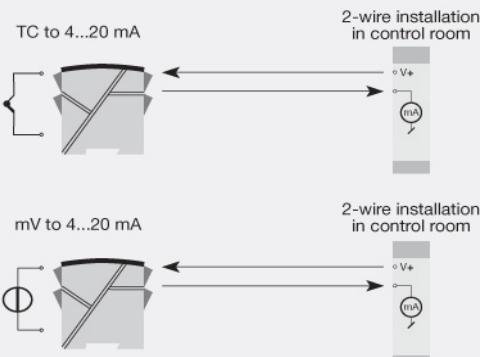

**Order:**

| Type  | Galvanic isolation | Channels                 |
|-------|--------------------|--------------------------|
| 6334A | 1500 VAC : 2       | Single : A<br>Double : B |

**Environmental Conditions**

|                              |                      |
|------------------------------|----------------------|
| Operating temperature.....   | -40°C to +85°C       |
| Storage temperature.....     | -40°C to +85°C       |
| Calibration temperature..... | 20...28°C            |
| Relative humidity.....       | < 95% RH (non-cond.) |
| Protection degree.....       | IP20                 |

**Mechanical specifications**

|                              |   |
|------------------------------|---|
| Dimensions (HxWxD).....      | 109 x 23.5 x 104 mm                                   |
| Weight (1 / 2 channels)..... | 145 / 185 g   |
| DIN rail type.....           | DIN EN 60715/35 mm                                    |
| Wire size.....               | 0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire |
| Screw terminal torque.....   | 0.5 Nm  |

**Common specifications****Supply**

|                                 |              |
|---------------------------------|--------------|
| Supply voltage.....             | 7.2...35 VDC |
| Internal power dissipation..... | 0.17...0.8 W |

**Isolation voltage**

|  |                   |
|--|-------------------|
| Isolation voltage, test / working..... | 1.5 kVAC / 50 VAC |
|--|-------------------|

**Response time**

|  |                                     |
|--|-------------------------------------|
| Response time (programmable).....                          | 1...60 s                            |
| Voltage drop.....  | 7.2 VDC                             |
| Warm-up time.....  | 5 min.                              |
| Programming.....   | Loop Link                           |
| Signal / noise ratio.....                                  | Min. 60 dB                          |
| Accuracy.....  | Better than 0.05% of selected range |
| EEPROM error check.....                                    | < 3.5 s                             |
| Signal dynamics, input.....                                | 18 bit                              |
| Signal dynamics, output.....                               | 16 bit                              |
| Effect of supply voltage change.....                       | < 0.005% of span / VDC              |
| EMC immunity influence.....                                | < ±0.5% of span                     |
| Extended EMC immunity: NAMUR NE21, A criterion, burst..... | < ±1% of span                       |

**Input specifications****Common input specifications**

|                  |                            |
|------------------|----------------------------|
| Max. offset..... | 50% of selected max. value |
|------------------|----------------------------|

**TC input**

|                        |  |
|------------------------|--|
| Thermocouple type..... | B, E, J, K, L, N, R, S, T, U, W3, W5, LR |
|------------------------|--|

|                                       |          |
|---------------------------------------|----------|
| Cold junction compensation (CJC)..... | < ±1.0°C |
|---------------------------------------|----------|

**Voltage input**

|                                    |              |
|------------------------------------|--------------|
| Measurement range.....             | -12...150 mV |
| Min. measurement range (span)..... | 5 mV         |
| Input resistance.....              | Nom. 10 MΩ   |

**Output specifications****Current output**

|                                   |   |
|-----------------------------------|---|
| Signal range.....                 | 4...20 mA                                 |
| Min. signal range.....            | 16 mA                                     |
| Load (@ current output).....      | ≤ (V <sub>supply</sub> - 7.2) / 0.023 [Ω] |
| Sensor error indication.....      | Programmable 3.5...23 mA                  |
| NAMUR NE43 Upscale/Downscale..... | 23 mA / 3.5 mA                            |

**Common output specifications**

|                    |                                   |
|--------------------|-----------------------------------|
| Updating time..... | 440 ms                            |
| of span.....       | = of the presently selected range |

**Observed authority requirements**

|          |                |
|----------|----------------|
| EMC..... | 2014/30/EU     |
| EAC..... | TR-CU 020/2011 |

**Approvals**

|                      |                   |
|----------------------|-------------------|
| ATEX 2014/34/EU..... | KEMA 10ATEX0005 X |
| IECEx.....           | DEK 14.0047 X     |