.140 DIA SOK 20-14 PTPBR V ACTIVE



MATE-N-LOK | Commercial MATE-N-LOK

TE Part # 61626-1 TE Internal #: 61626-1

View on TE.com >



Connectors > Power Connectors > Power Contacts











Product Type: Contact

Operating Voltage: 250 VAC Wire Size: .52 – 2.08 mm²

Connector System: Wire-to-Wire

Features

Product Type Features

Product Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Operating Voltage	250 VAC
Contact Features	
Contact Current Rating (Max)	17 A
Contact Type	Socket
Contact Base Material	Brass
Contact Mating Area Plating Material	Pre-Tin
Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Angle	Straight
Termination Features	

Crimp

Termination Type



Contact Retention Type Within Housing	Locking Lance
Connector Mounting Type	Cable Mount (Free-Hanging)
Contact Retention in Housing	With
Wire Insulation Support	With
Dimensions	
Wire Size	.52 – 2.08 mm²
Mating Pin Diameter	3.56 mm[.14 in]
Accepts Wire Insulation Diameter Range	2.54 – 4.57 mm[.1 – .18 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
For Multiple Crimp	No
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	CSA, UL
UL Flammability Rating	UL 94V-2
UL File Number	E28476
Packaging Features	
Packaging Method	Reel
Packaging Quantity	2500
Other	
Wire/Cable Type	Discrete Wire
For Use With	Plug Housing
Comment	HDM Applicator part number ending in -1 is used on AMPOMATOR CLS Machine with T or G Terminators, -2 is used on AMPOLECTRIC Model K Machine, -6 is used on AMPOLECTRIC Model G Machine.

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2019 (197) Candidate List Declared Against: JAN 2019 (197)
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



Applicators(4)



Insertion & Extraction Tools (1)



Portable Crimp Tools(2)



Rectangular Connector Housings(4)



Rectangular Power Connectors(6)



Also in the Series | Commercial MATE-N-LOK



Connector Contacts(55)



Crimp Wire Pins, Tabs & Ferrules(3)



Power Contacts(132)



Rectangular Caps & Covers (2)



Rectangular Connector Housings(20)



Rectangular Connector Seals(1)



Rectangular Power Connectors(171)




Standard Rectangular Connectors(10)




Wire-to-Board Connector Contacts(1)


Customers Also Bought

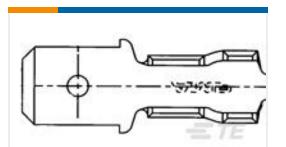


TE Part #41412 FASTON 250(6.3MM) TAB 18-14 AWG TPBR

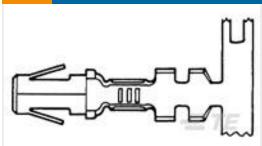

TE Part #350200-1 .140 DIA SOK 14-10 PTPBR

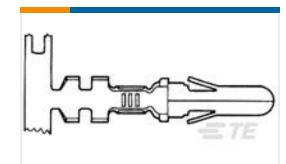


TE Part #61627-1 .140 DIA PIN 20-14 PTPBR

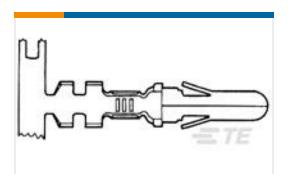

TE Part #350201-1 .140 DIA PIN 14-10 PTPBR



TE Part #61352-1 RING .197 (5.0 MM) 10-6 AWG TPBR



TE Part #521295-1 HOUSING, POSITIVE LOCK, RAST




TE Part #60433-2 RING CRIMP 18-14 AWG TPBR



TE Part #62050-1 FASTON .110 RECEPTACLE 20-16 AWG PTPBR



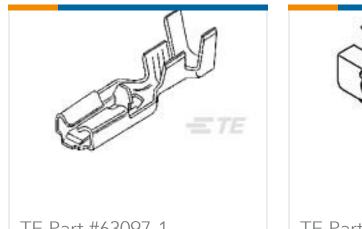





Documents

Product Drawings

.140 DIA SOK 20-14 PTPBR

English

CAD Files

Customer View Model

ENG_CVM_61626-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_61626-1_E.3d_stp.zip

English

Customer View Model

ENG_CVM_61626-1_E.2d_dxf.zip

English

3D PDF

English

Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

MATE-N-LOK .140 Diameter Pin & Socket Contacts

Japanese

Application Specification

Japanese

Application Specification

English

MATE-N-LOK .140 Diameter Pin And Socket Contacts

English

Application Specification

Japanese

Product Environmental Compliance

TE Material Declaration

English

.140 DIA SOK 20-14 PTPBR

TE Part # 61626-1 TE Internal #: 61626-1

