



COAXIAL

Power Splitter/Combiner **ZC4PD-E18673+**


50Ω 4 Way-0° 18 to 67 GHz 12W 1.85mm Female

THE BIG DEAL

- Wideband, 18 to 67 GHz
- Low Insertion Loss, 2dB typ.
- 12W Power Handling
- High Isolation, 32dB typ.
- Low Amplitude Unbalance, 0.2dB typ.
- Stripline Design

APPLICATIONS

- 5G MIMO and Back Haul Radio Systems
- LTE & 5G MIMO Infrastructure
- Satellite Communications
- Test & Measurement Equipment
- Radar, EW, and ECM Defense Systems



Generic photo used for illustration purposes only

Model No.	ZC4PD-E18673+
Case Style	UU2413-5
Connectors	1.85mm Female

+RoHS Compliant
 The +Suffix identifies RoHS Compliance.
 See our website for methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' ZC4PD-E18673+ is a wideband 4-way 0° power splitter/combiner. It provides coverage from 18 to 67 GHz, (Ka band & V band) supporting a wide range of applications including 5G, Defense, Instrumentation and many more. This model provides 12W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC4PD-E18673+ comes housed in a case measuring 1.00 x 2.04 x 0.5" with 1.85mm female connectors.

KEY FEATURES

Features	Advantages
Wideband, 18 to 67 GHz	Extremely wide frequency range supports many broadband applications in a single model.
Low insertion loss, 2 dB typ.	The combination of 12W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 32 dB typ	Minimizes interference between ports
High power handling: <ul style="list-style-type: none"> • 12W as a splitter at 25°C • 1.2W as a combiner at 25°C 	The ZC4PD-E18673+ is suitable for systems with a wide range of power requirements
Low amplitude unbalance, 0.2 dB	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 350mA as a splitter	Supports applications where DC power is needed through the RF line.

REV. OR
 ECO-015925
 ZC4PD-E18673+
 MCL NY
 221129





COAXIAL

Power Splitter/Combiner ZC4PD-E18673+

Mini-Circuits

50Ω 4 Way-0° 18 to 67 GHz 12W 1.85mm Female

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		18		67	GHz
Insertion Loss (above theoretical 6.0dB per port)	18 - 40		1.4	2.4	dB
	40 - 50		2.0	2.9	
	50 - 67		2.7	3.8	
Isolation	18 - 40	16	30		dB
	40 - 50	16	33		
	50 - 67	16	33		
Phase Unbalance (±) ¹	18 - 40		3		Degree
	40 - 50		5		
	50 - 67		6		
Amplitude Unbalance (±) ¹	18 - 40		0.1	0.5	dB
	40 - 50		0.2	0.7	
	50 - 67		0.2	0.9	
VSWR (Port S)	18 - 40		1.20	1.7	:1
	40 - 50		1.17	1.8	
	50 - 67		1.17	1.9	
VSWR (Port 1-4)	18 - 40		1.18	1.7	:1
	40 - 50		1.15	1.8	
	50 - 67		1.11	1.9	
Power Handling	As Splitter ¹			12	W
	As Combiner ²			1.2	


1. All outputs must be terminated with 50 ohm (VSWR 1.5:1 or better)
2. As a combiner of non-coherent signals, max. power per port is 0.3 watt

MAXIMUM RATINGS

Parameter	Ratings
Operating Case Temperature	-50 °C to +100 °C
Storage Temperature	-50 °C to +100 °C

Permanent damage may occur if any of these limits are exceeded.

FUNCTIONAL DIAGRAM

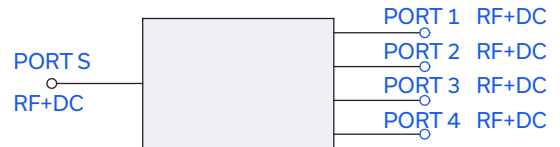



COAXIAL

Power Splitter/Combiner ZC4PD-E18673+

Mini-Circuits


50Ω 4 Way-0° 18 to 67 GHz 12W 1.85mm Female

COAXIAL CONNECTIONS

Input / Output ¹	S
Output / Input ¹	1-4

Note1: Unit is bi-directional design

OUTLINE DRAWING

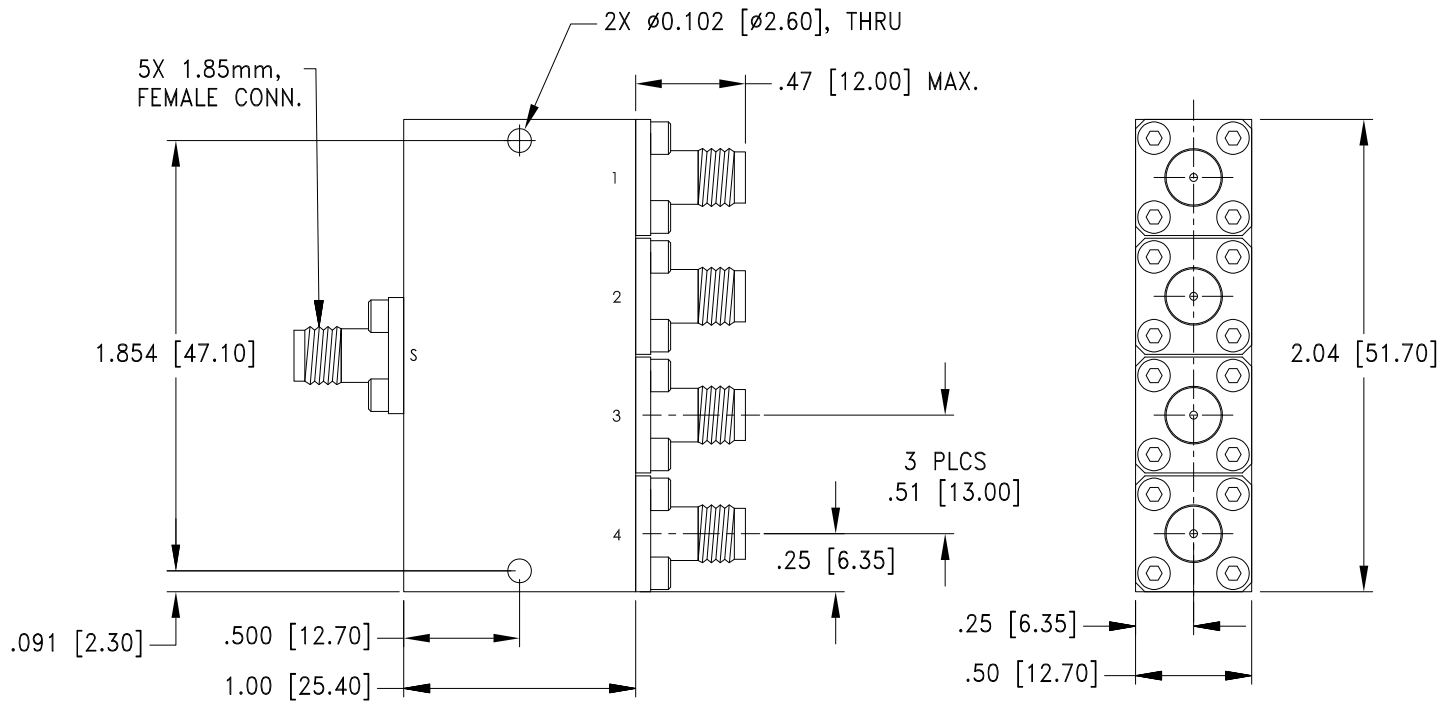

Dimensions are in inches (mm). Tolerances: 2 Pl. + .03; 3 Pl. + .015
Weight: 70 grams









COAXIAL

Power Splitter/Combiner ZC4PD-E18673+

Mini-Circuits

50Ω 4 Way-0° 18 to 67 GHz 12W 1.85mm Female

TYPICAL PERFORMANCE CURVES

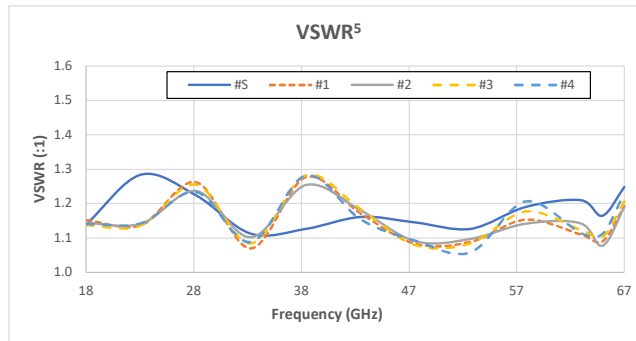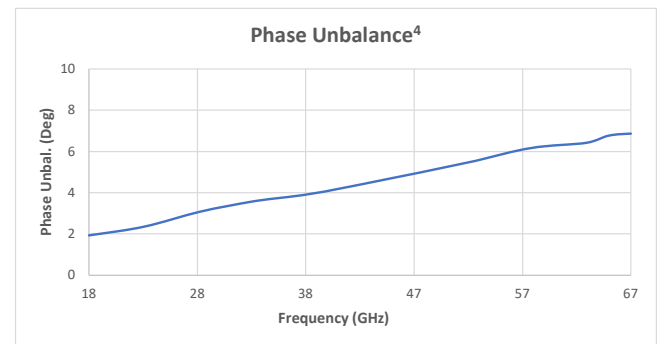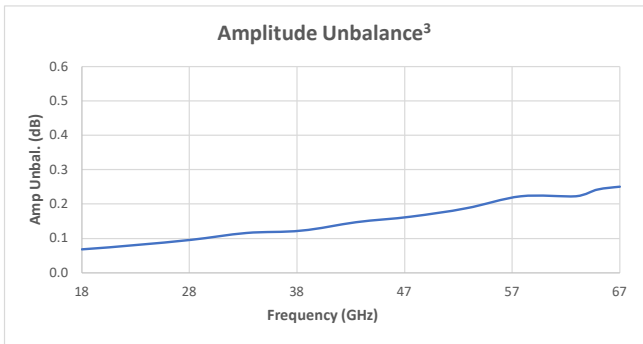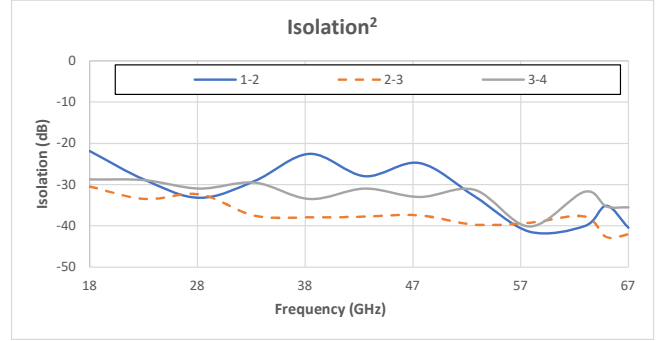

Note:

1. Insertion loss is loss above theoretical loss (6dB)
2. Isolations are representative of all combination of ports
3. Amplitude unbalance is average unbalance between any ports
4. Phase unbalance is average unbalance between any ports
5. VSWR is typical representation of all ports

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZC4PD-E18673+](#)