


KEMET Part Number: PHE450XB4220JB10R17
(F450BJ222J3K0A)

PHE450/F450, Film, Double Metallized Polypropylene, General Purpose, 2200 pF, 5%, 3000 VDC, 85°C, Lead Spacing = 7.5mm

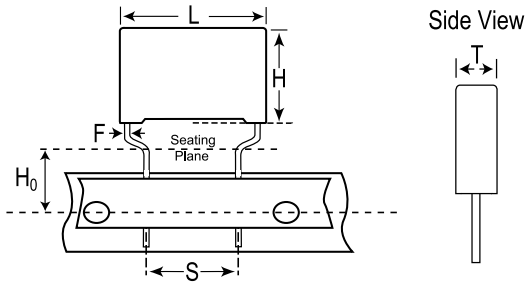

General Information	
Supplier:	KEMET
Series:	PHE450/F450
Dielectric:	Double Metallized Polypropylene
Style:	Radial
Features:	Pulse
RoHS:	Yes
Lead:	Formed To 7.5mm
Miscellaneous:	The Rated Voltage Decreases 1.3%/C Between +85C And +105C. Rthha= 87 C/W (85C), 0.2 m/s

Dimensions	
L	18mm MAX
H	12.5mm MAX
T	6.5mm MAX
S	7.5mm +0.6/-0.1mm
LL	17mm -1mm
H0	16mm +/-0.5mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Specifications	
Capacitance:	2200 pF
Capacitance Tolerance:	5%
Voltage AC:	1000 VAC
Voltage DC:	3000 VDC (85C), 2220 VDC (105C)
Temperature Range:	-55/+105C
Rated Temperature:	85°C
Dissipation Factor:	0.03% 1kHz, 0.04% 10kHz, 0.15% 100kHz
Insulation Resistance:	13636.364 GOhms
Max dV/dt:	2500 V/us
Inductance:	6 nH

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	600