


TOLERANCES ON ALL DIMENSIONS TO BE ±0.1mm UNLESS OTHERWISE STATED

REVISIONS					
SYM	CN NUMBER	DATE	BY	CHKD	APD
B	UK9426	5.6.95	NW		
C	UK9648	7.2.97	I.J.		

OUTER JACKET MATERIAL: PVC
 CONDUCTOR SHEATH MATERIAL: PVC
 OUTER JACKET COLOUR: YELLOW-RAL 1018
 CONDUCTOR COLOURS: BROWN, WHITE, BLUE, BLACK
 NOMINAL JACKET O.D. 5.00 ^{+0.30}/_{-NIL}
 NOMINAL CONDUCTOR O.D.: 1.55
 NOMINAL JACKET THICKNESS:
 STRANDING TO B.S.6360/VDE 0295 42 X 0.1mm
 U.L. N/A
 C.S.A. N/A
 C.S.A. OF CONDUCTORS: 0.34mm²
 NUMBER OF CORES: 4
 VOLTAGE RATING: 300
 TEMPERATURE RATING: -5°C TO +70°C FLEXING
 -30°C TO +70°C STATIC
 DELIVERY SPECIFICATION: CABLE DRUM DIA. 800mm MAX.
 BRAIDED: N/A
 IMPRINT: AS PER STD-104UK
 COMMENTS:

COLOUR ROTATION OF CONDUCTORS VIEWED AS CABLE COMES OFF CABLE DRUM.
 NOTE:-IT IS IMPORTANT THAT THIS ROTATION IS MAINTAINED THROUGH THE WHOLE LENGTH.

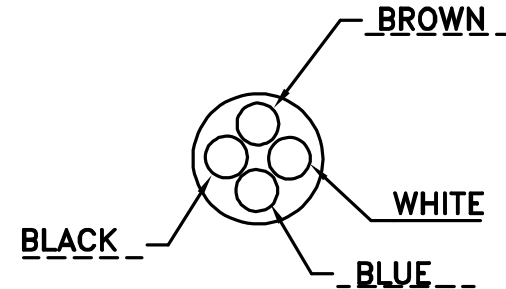

- NOTES:
 1-OUTER JACKET TO BE FREE OF CONVOLUTIONS.
 2-OUTER JACKET IS NOT TO HAVE INK SMEARED.
 3-OUTER JACKET IS TO BE CLEAN AND FREE OF CONTAMINATION.
 4-DO NOT DEVIATE ON STRANDING.

SUPPLIER: _____

CABLE DESCRIPTION.			FINISH	SCALE
CABLE, PVC, YEL, DC, 4 X 0.34mm				
AERO-MOTIVE(UK)LTD FACTORY 9 RASSAU IND EST. EBBW VALE GWENT NP35SD	DRAWN	NAME NW	DATE 4.5.95	PART NUMBER
	CHECKED			
	APP.			E03-4
				REV. C

Revision	CN Number	Date	By	App'd

Revision	CN Number	Date	By	App'd
H	UK00745	10/12/03	NV	NV
J	UK00980	13/12/04	NV	NV

Revision	CN Number	Date	By	App'd
F	UK0350	13/11/95	NV	NV
G	UK0349	07/02/97	IJ	NV
	UK0046-97	13/11/95	TD	NV

OUTER JACKET MATERIAL: P.V.C.
 INNER JACKET MATERIAL: P.V.C. (BLACK)
 CONDUCTOR SHEATH MATERIAL: P.V.C.
 OUTER JACKET COLOUR: YELLOW -RAL 1018
 CONDUCTOR COLOURS: BROWN,WHITE,BLUE,BLACK
 NOMINAL OUTER JACKET O.D. 6.2mm MIN/6.4mm MAX
 NOMINAL CONDUCTOR O.D.: 1.40mm±0.10
 NOMINAL JACKET THICKNESS: TBA

STRANDING TO B.S.6360/VDE 0295 19 X 0.16mm -TINNED COPPER

U.L. CABLE ASSEMBLY-STYLE 2661,CONDUCTOR-STYLE 1731

C.S.A. CERTIFIED

C.S.A. OF CONDUCTORS: 0.34mm²

NUMBER OF CORES: FOUR

VOLTAGE RATING: 300V

TEMPERATURE RATING: -30°C TO +105°C

MINIMUM BEND RADIUS 128mm

BRAIDED: YES (LOW COVERAGE-50%)


IMPRINT: (TO BE REPEATED EVERY 305mm.) IMPRINT JACKET PER STD-103UK

COMMENTS:

CABLE TO BE BRAIDED OVER

INNER PVC CABLE JACKET

COLOUR ROTATION
 OF CONDUCTORS:
 (NOTE-THIS ROTATION)
 (MUST BE MAINTAINED)

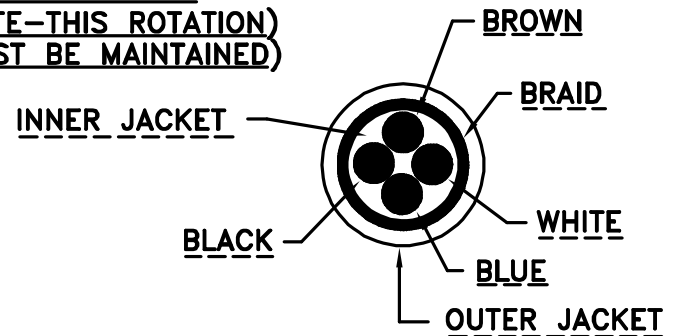

NOTES:

- 1-OUTER JACKET TO BE FREE OF CONVOLUTIONS.
- 2-OUTER JACKET IS NOT TO HAVE INK SMEARED.
- 3-OUTER JACKET IS TO BE CLEAN AND FREE OF CONTAMINATION.
- 4-DO NOT DEVIATE ON STRANDING.
- 5-TIGHTNESS OF OUTER JACKET OVER BRAID.
A 100mm LENGTH OF OUTER JACKET SHOULD BE MOVEABLE, BY HAND, FIRMLY BUT FREELY OVER THE BRAIDED SECTION.


A4	MATERIAL:	Tolerances: Linear 0 = ±0.5mm (0.02") 0.0 = ±0.25mm (0.01") 0.00 = ±0.1mm (0.005")	ALL DIMENSIONS ARE IN mm Cable Lengths Less than 5m = ±25mm More than 5m = ±50mm	DRAWN	N Witts	TITLE:	SCALE
	FINISH :			DATE	20.09.94	CABLE, SJTO, YEL,DC 4 X 0.34mm	NTS
		 Woodhead Connectivity Ltd FACTORY 9 RASSAU IND. EST. ENBW VALE GREAT WYKE S80 THIS DRAWING IS THE PROPERTY OF WOODHEAD CONNECTIVITY LTD. THE INFORMATION CONTAINED IS CONFIDENTIAL AND MUST NOT BE DISCLOSED	CHK'D	NW	PART NO:	REVISION	
					S20-4	J	

TOLERANCES ON ALL DIMENSIONS TO BE $\pm 0.1\text{mm}$ UNLESS OTHERWISE STATED

REVISIONS					
SYM	CN NUMBER	DATE	BY	CHKD	APD
B	UK9426	6.6.95	NW		
C	UK9648	10.2.97	I.J.		
C	UK9847	25.8.98	NW		
E	UK9870	8.10.98	NW		

OUTER JACKET MATERIAL: PUR
 CONDUCTOR SHEATH MATERIAL: PVC
 OUTER JACKET COLOUR: MATT BLACK-RAL 9005
 CONDUCTOR COLOURS: BROWN, WHITE, BLUE, BLACK, GREY
 NOMINAL JACKET O.D. $5.50^{+0.30}_{-NIL}$
 NOMINAL CONDUCTOR O.D.: 1.55
 NOMINAL JACKET THICKNESS:
 STRANDING TO B.S.6360/VDE 0295 42 X 0.1mm
 U.L. N/A
 C.S.A. N/A
 C.S.A. OF CONDUCTORS: 0.34mm^2
 NUMBER OF CORES: 5
 VOLTAGE RATING: 300
 TEMPERATURE RATING: -5°C TO $+90^{\circ}\text{C}$ FLEXING
 -30°C TO $+90^{\circ}\text{C}$ STATIC
 DELIVERY SPECIFICATION: CABLE DRUM DIA. 800mm MAX.
 BRAIDED: N/A
 IMPRINT: AS PER STD-109UK
 COMMENTS:

COLOUR ROTATION OF CONDUCTORS VIEWED AS CABLE COMES OFF CABLE DRUM.
 NOTE:-IT IS IMPORTANT THAT THIS ROTATION IS MAINTAINED THROUGH THE WHOLE LENGTH.

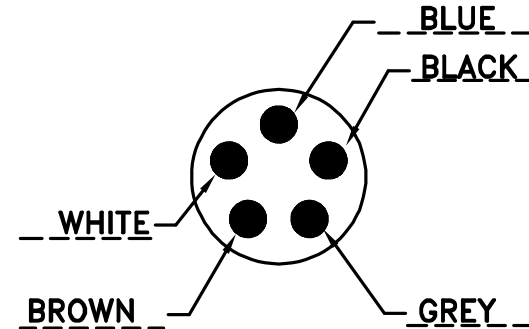

- NOTES:
- 1-OUTER JACKET TO BE FREE OF CONVOLUTIONS.
 - 2-OUTER JACKET IS NOT TO HAVE INK SMEARED.
 - 3-OUTER JACKET IS TO BE CLEAN AND FREE OF CONTAMINATION.
 - 4-DO NOT DEVIATE ON STRANDING.

SUPPLIER: _____

CABLE DESCRIPTION.			FINISH	SCALE
CABLE, PUR, BLACK, DC, 5 X 0.34mm				
AERO-MOTIVE(UK)LTD FACTORY 9 RASSAU IND EST. EBBW VALE GWENT NP35SD	DRAWN	NAME NW	DATE 4.5.95	PART NUMBER
	CHECKED			
	APP.			P03-5