

# Flat Cable EMI Suppression Cores (2643166851)



Part Number: 2643166851

43 SPLIT FLAT CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

**Flat cable suppression core can accommodate multi- conductors flat cables, in widths from 12.7 mm (0.500) up to 77 mm (3.0). These flat cable cores are available in two ferrite material grades to reduce conducted EMI from 1 MHz to hundreds of MHz.**

Clip Part Number: 0199001401

Our Expanded Cable & Suppressor Kit (part number 0199000005) contains a selection of these flat cable cores and clips.

Flat Cable Cores are available in selected sizes in the Flex Circuit & Ribbon Cable Core Kit (part number 0199000038).


Assembly clips are available for most of the split flat cable cores. See section Flat Cable Cores Assembly clips.

[Catalog Drawing](#)  
[3D Model](#)

Weight: 27 (g)

| Dim | mm    | mm tol | nominal inch | inch misc. |
|-----|-------|--------|--------------|------------|
| A   | 38.1  | ±1.00  | 1.5          | -          |
| B   | 26.65 | ±0.75  | 1.049        | -          |
| C   | 25.4  | ±0.75  | 1            | -          |
| D   | 6.35  | ±0.25  | 0.25         | -          |
| E   | 0.85  | ±0.20  | 0.033        | -          |

| Cable Information |               |                  |                  |
|-------------------|---------------|------------------|------------------|
| Max Diameter      | Max Dimension | Solid Equivalent | Flat Cable Cores |
| 0                 | 25.90 x 1.30  | -                | -                |
| 0                 |               |                  |                  |

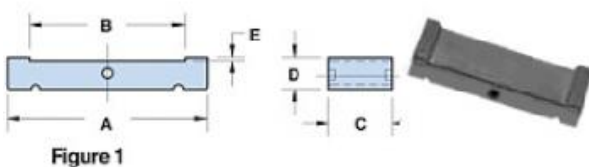

**Chart Legend**


- + Test frequency
- For assembly clips see Flat Cable Cores Assembly Clips

| Typical Impedance (Ω) |     |
|-----------------------|-----|
| 10 MHz                | 77  |
| 25 MHz <sup>+</sup>   | 119 |
| 100 MHz <sup>+</sup>  | 227 |
| 250 MHz               | 370 |

Flat cable suppression cores, split or single cores, are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

[Catalog Drawing](#)

Centered, single turn impedance tests for the 31 and 43 material parts are performed on the E4990A Impedance Analyzer. All tests are made with the shortest practical wire length.

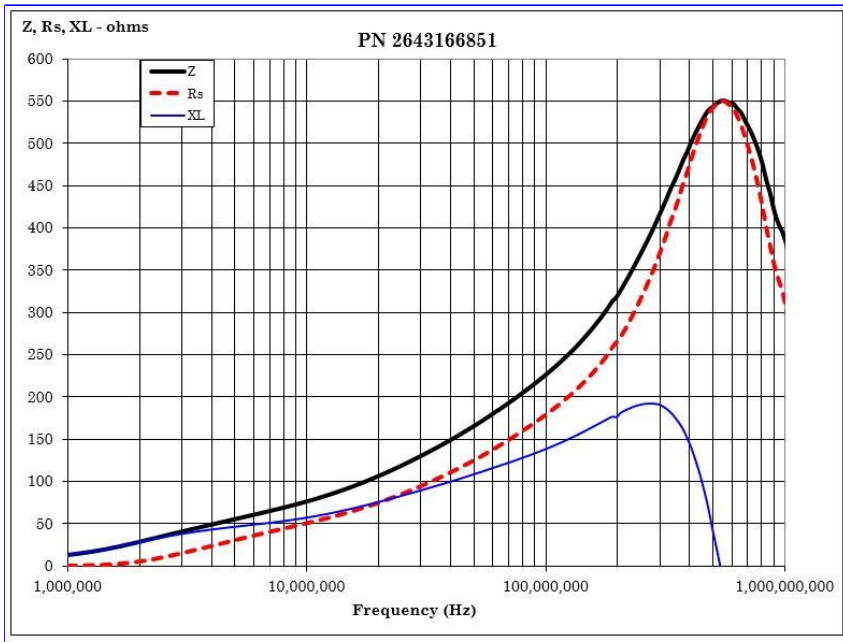

[CSV Download](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fair-Rite:](#)

[2643166851](#)