Beads- on- Leads (2743001112)



Part Number: 2743001112

43 BEAD ON LEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- − Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.

- Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.

Recommended Soldering Profile

Packaging Options:

- Beads- on- leads can be supplied bulk packed. The last digit of bulk packed parts is a "1". Parts with a "2" as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296- F standards. Taped and reeled parts are supplied 4500 pieces on a 14" reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.
- Our "Bead- on- Lead Suppression Kit" (part number 0199000028) is available for prototype evaluation.

For any bead- on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing 3D Model

Weight: 0.4 (g)

| Dim | mm | mm tol | nominal inch | inch misc. | | |
|-----|------|--------|--------------|------------|--|--|
| A | 3.5 | ±0.25 | 0.138 | _ | | |
| В | 62 | ±1.50 | 2.44 | _ | | |
| С | 4.45 | ±0.25 | 0.176 | _ | | |
| D | 0.65 | | 0 | 22 AWG | | |

| Reel Informat | tion | | | |
|---------------|-------------|------------------|-------------------|-------------------|
| Tape Width mm | Pitch mm | Parts 7" Reel | Parts 13" Reel | Parts 14" Reel |
| 6 | 5 | | | 4500 |




Chart Legend


+ Test frequency


| Typical Impedan | ice (Ω) |
|----------------------|---------|
| 10 MHz | 35 |
| 25 MHz ⁺ | 50 |
| 100 MHz ⁺ | 70 |
| 250 MHz | 79 |

Beads- on- leads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

The impedance of the 73 & 43 beads- on- leads are measure on the E4990A Impedance Analyzer. The 61 beads- on- leads are tested for impedance on the E4991A / $\rm HP4291B$ Impedance Analyzer.

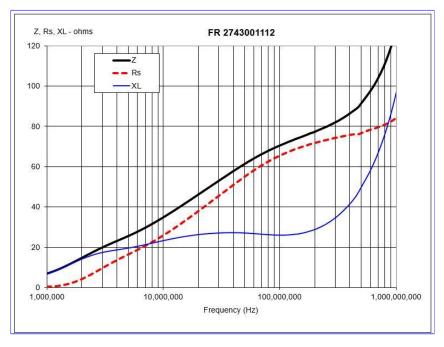

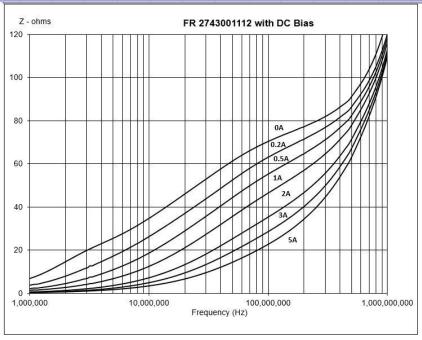

CSV Download

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fair-Rite: 2743001112