

### Series 9159



The 9159 series of Board-to-Board interconnect system allows two PCB's to be mated end-to-end creating strips of LED lighting. Designed specifically for the unique Solid State Lighting (SSL) market requiring coplanar (horizontal-to-horizontal) PCB mating. The 1-Piece Card Edge connector was developed to provide a reliable, low cost and simple means of connecting multiple PCB's together. The single stamped contact has dual contact beams to guarantee a high contact force on standard 1.6mm PCB's. These connectors are available in 2 through 5 positions and are on 2.0mm pitch centers to provide a 3 amp continuous rating. Available in both black and white to meet the application requirements.

#### **APPLICATIONS**

- Coplanar PCB mating in SSL products
- LED linear lighting strips

### FEATURES AND BENEFITS

- Dual contacts provide positive contact force for enhanced reliability
- Mates with standard 1.6 ± 0.15mm PCB on 2.0mm pad pitch
- 3 amp current rating for high current applications
- Available in white; supports SSL market preferences

#### **ELECTRICAL**

- Current Rating; 3 Amps / Contact
- Voltage Rating; 250 VAC

### **ENVIRONMENTAL**

• Operating Temperature: -55°C to +125°C

#### **MECHANICAL**

Insulator Material: Nylon 46: UL94HB

06


Plating

Option

all over

- Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- Durability: 5 Cycles

### **HOW TO ORDER**

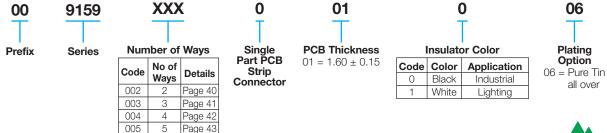









### **2 WAY SINGLE PART PCB STRIP CONNECTOR**

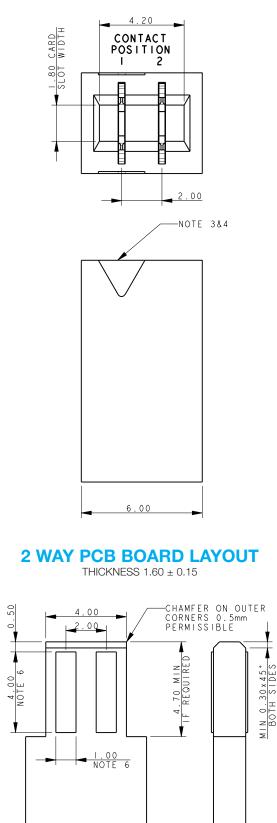


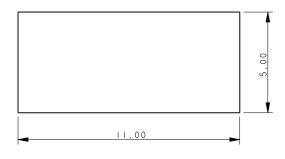

NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-118.
- 2. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 3. ARROW TO INDICATE CONTACT POSITION 1.
- 4. INSULATOR MATERIAL: NYLON 46, UL94 HB, COLOR SEE PAGE 39.
- 5. CONTACT MATERIAL: COPPER ALLOY, TIN PLATED ALL OVER.
- 6. PCB PAD, TIN PLATED.




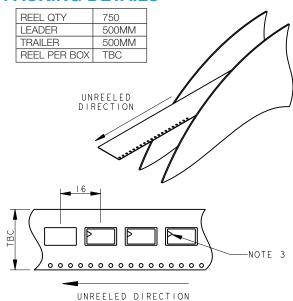





### Series 9159

### **3 WAY SINGLE PART PCB STRIP CONNECTOR**

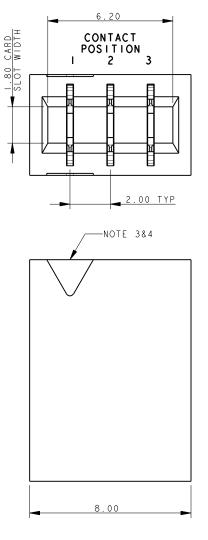

### **3 WAY PCB BOARD LAYOUT**

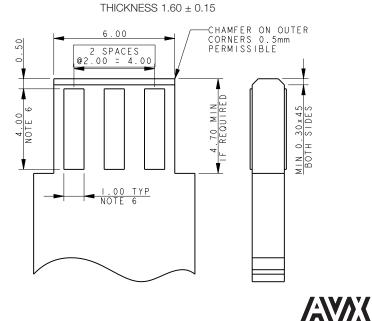


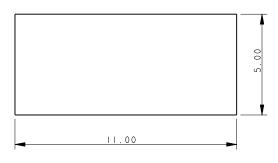

NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-118.
- 2. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 3. ARROW TO INDICATE CONTACT POSITION 1.
- 4. INSULATOR MATERIAL: NYLON 46, UL94 HB, COLOR SEE PAGE 39.
- 5. CONTACT MATERIAL: COPPER ALLOY, TIN PLATED ALL OVER.
- 6. PCB PAD, TIN PLATED.



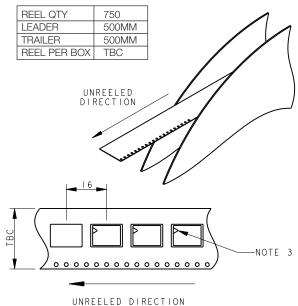



41






### **4 WAY SINGLE PART PCB STRIP CONNECTOR**

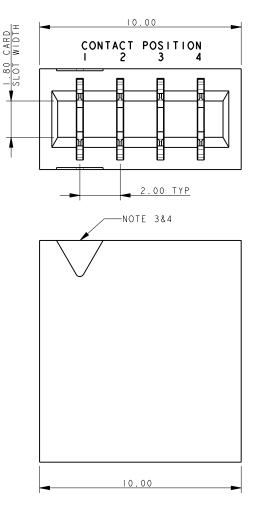


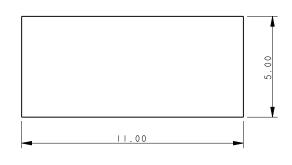


NOTES:

- 1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-118.
- 2. DIMENSIONS ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
- 3. ARROW TO INDICATE CONTACT POSITION 1.
- 4. INSULATOR MATERIAL: NYLON 46, UL94 HB, COLOR SEE PAGE 39.
- 5. CONTACT MATERIAL: COPPER ALLOY, TIN PLATED ALL OVER.
- 6. PCB PAD, TIN PLATED.

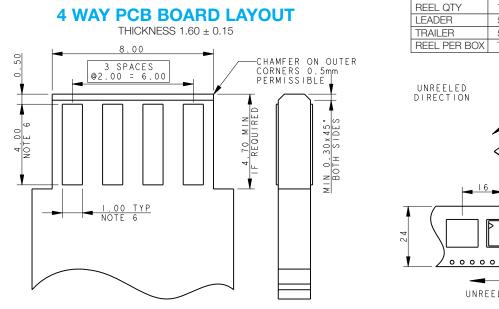


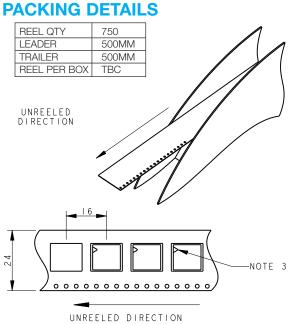





### **5 WAY SINGLE PART PCB STRIP CONNECTOR**

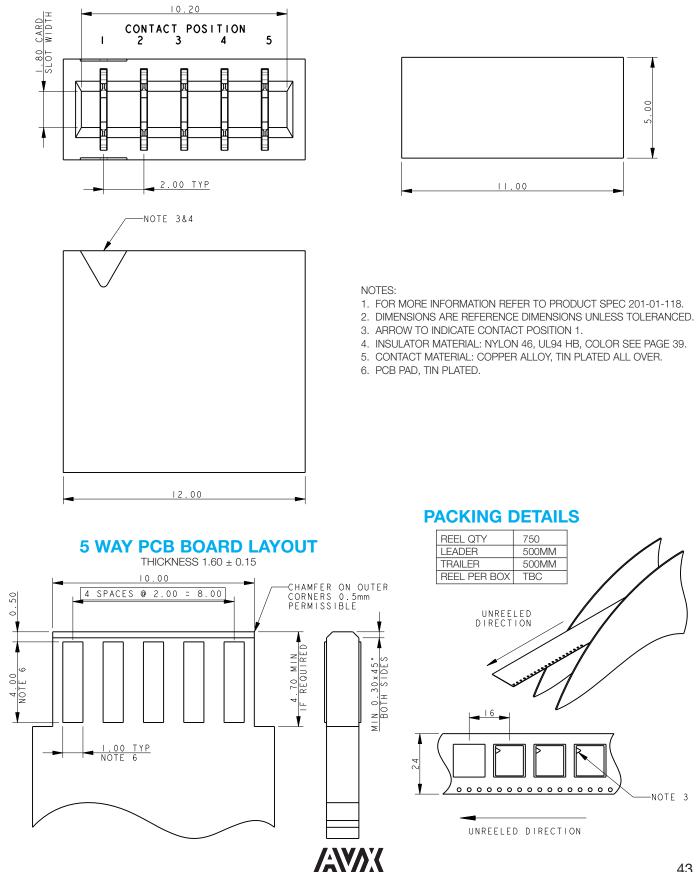

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX:

<u>009159003001106</u> <u>009159004001106</u> <u>009159002001106</u> <u>009159005001106</u> <u>009159002001006</u> 009159003001006 009159004001006 009159005001006