
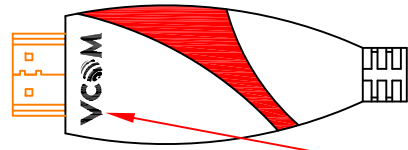



VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

版本	变更记录	变更日期
A/0	首次发行	2015-05-30

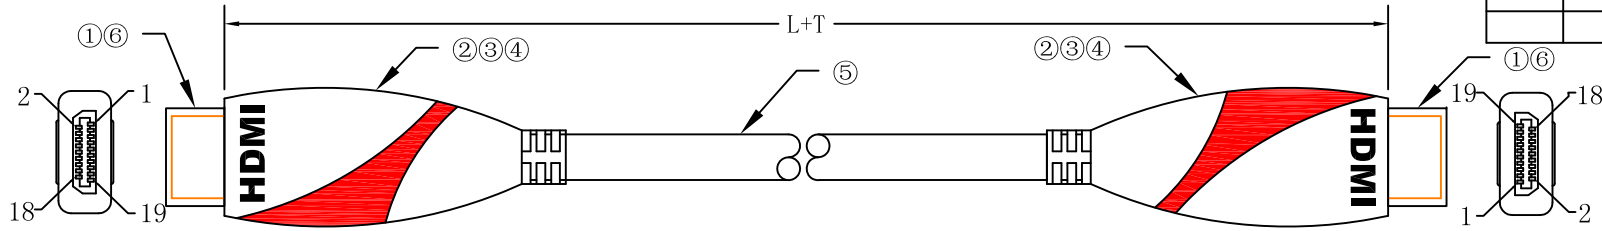

“VCOM” LOGO

WIRING DIAGRAM:

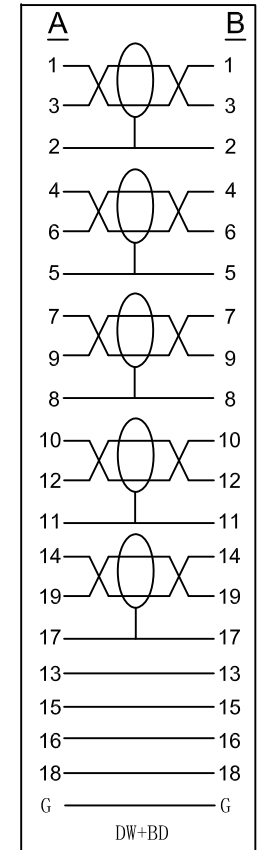

NO.	Cable length (L)	Cable tolerance (T)
1	1000MM	10MM
2	1500MM	15MM
3	1800MM	20MM
4	3000MM	30MM
5		

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 30AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7.3, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-A	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY:	CT	


VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

版本	变更记录	变更日期
A/0	首次发行	2015-04-27

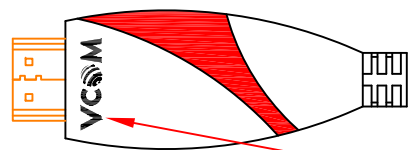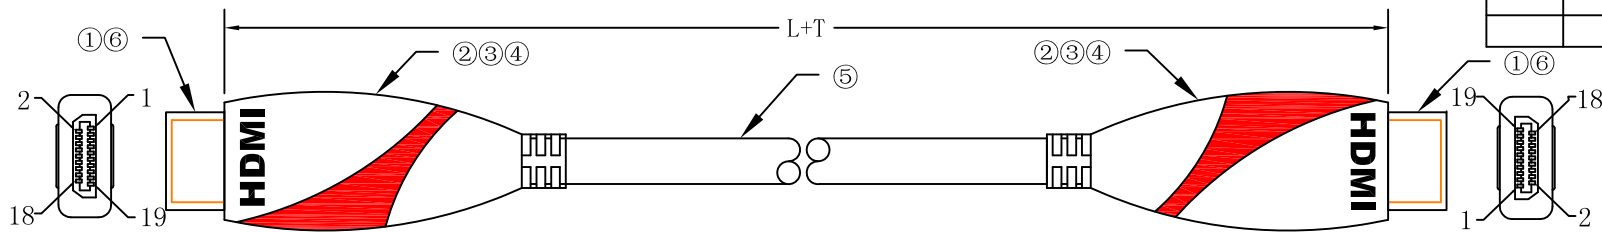

A "VCOM" LOGO B

WIRING DIAGRAM:

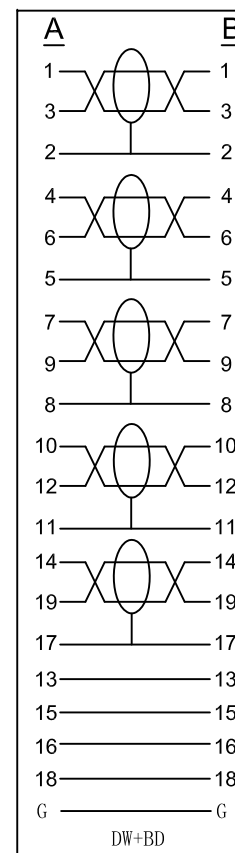

NOT: COAX

NO.	Cable length (L)	Cable tolerance (T)
1	5000MM	50MM
2	7500MM	100MM
3	10000MM	100MM
4		
5		

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 30AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7.3, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-B	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY:	CT	

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


版本	变更记录	变更日期
A/0	首次发行	2015-04-27

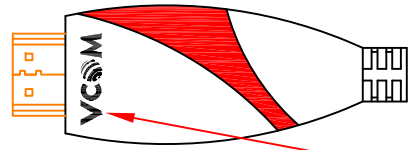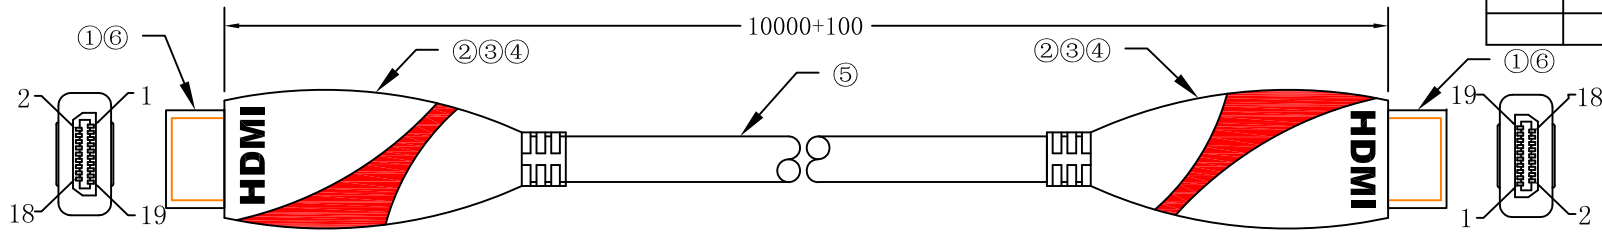

A “VCOM” LOGO

B

WIRING DIAGRAM:

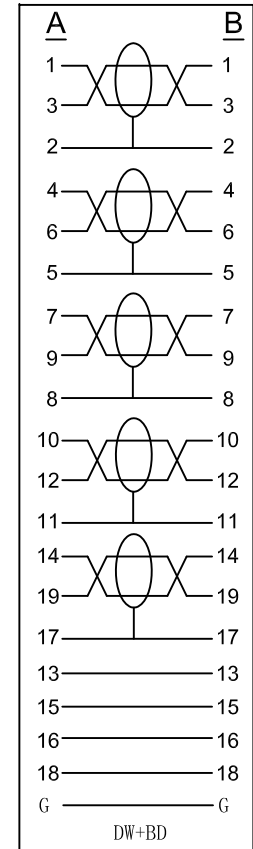

NOT: COAX

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 28AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 7. 3, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-C	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641

版本	变更记录	变更日期
A/0	首次发行	2015-04-27

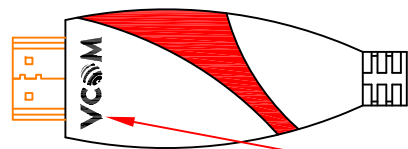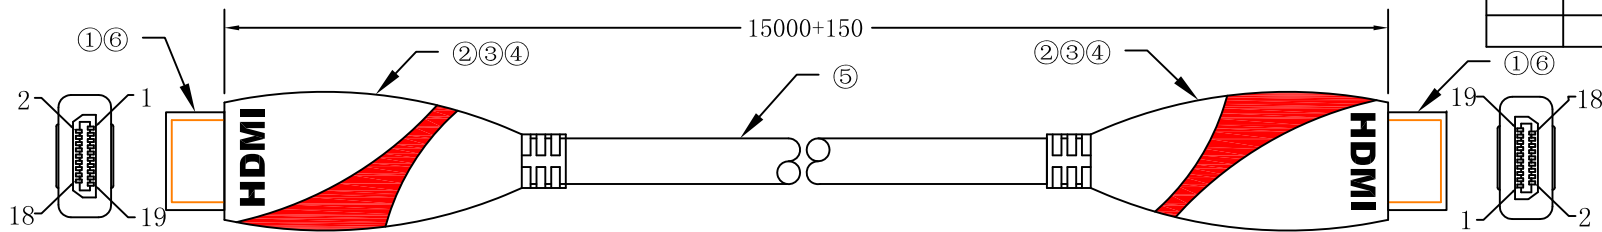


A

“VCOM” LOGO

B

WIRING DIAGRAM:

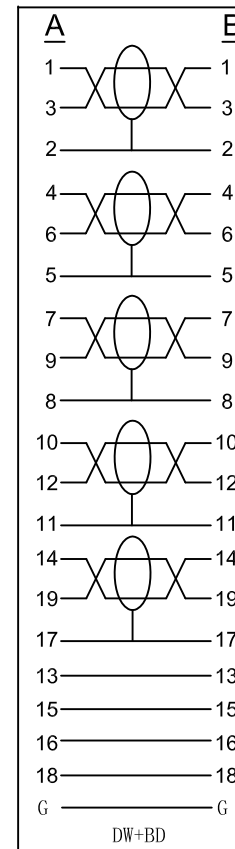

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

NOT COAX



⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 26AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 8. 0, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-D	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable with Ethernet 一组白色印字,印字轮编号: A641


版本	变更记录	变更日期
A/0	首次发行	2015-04-27

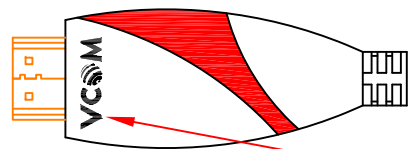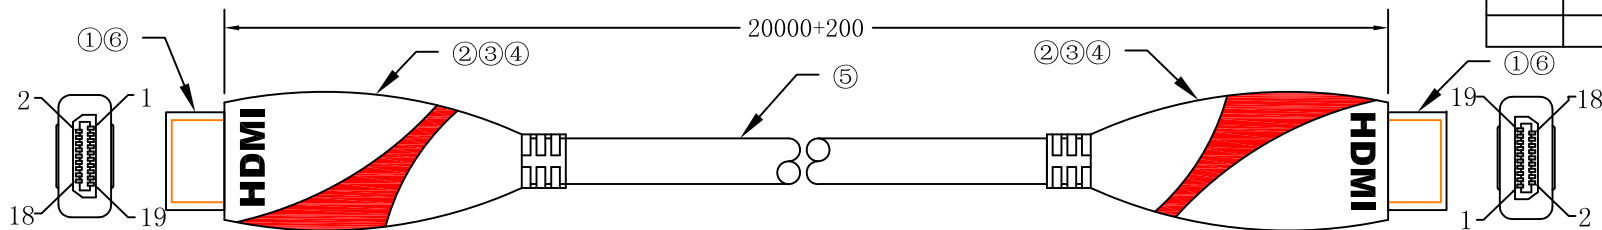

A "VCOM" LOGO

B

WIRING DIAGRAM:

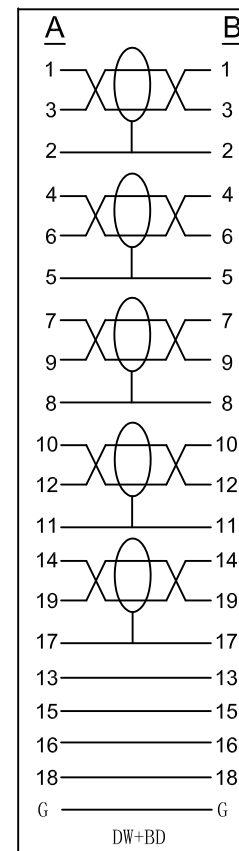

NOT: COAX

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 10Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

⑥	JACKET: PVC/TRANSPARENT/ANTI-OXIDATION/50P		g		
⑤	CABLE: 24AWG (1P+DW+AL/MY) *5P+4C+AL/MY+DW+BD OD: 9. 0, PVC JACKET, BLACK		M		
④	INNER MOLDING: LD PE		g		
③	OVER MOLDING: 50P PVC BLACK				
②	OVER MOLDING: 50P PVC RED		g		
①	HDMI 19PIN MALE SOLDERING TYPE GOLD PLATED, 15u		PCS		
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	HDMI19PM/HDMI19PM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0006-E	CUSTOMER NO.		SCALE		
PRODUCT NO.	CG525-R	REV:		A/0	DATE	2017-04-27
DRAWN BY:		CHECKED BY:		APPROVED BY: CT		