

SMALL SEMICONDUCTOR HEATER

RC 016 | 8 W, 10 W, 13 W



- > Wide voltage range
- > Dynamic heating up

- > Energy saving
- > Compact

These small heaters are designed to prevent condensation and to ensure a minimum operating temperature in small enclosures. The heaters are designed for permanent operation.




TECHNICAL DATA


Operating voltage	AC/DC 120 – 240 V ¹ (min. 110 V, max. 265 V)
Heating element	PTC resistor – temperature limiting
Heater body	aluminium, anodised
Mounting	screw fixing
Fitting position	variable
Operating/Storage temperature	-45 to +70 °C (-49 to +158 °F)
Operating/Storage humidity	max. 90 % RH (non-condensing)
Protection type/Protection class	IP54 / II (double insulated)
Approvals	VDE, UL File No. E234324, EAC
Note	other voltages on request

¹ Operating with voltages below AC/DC 140 V reduces heating performance by approx. 10 %.


Example of connection

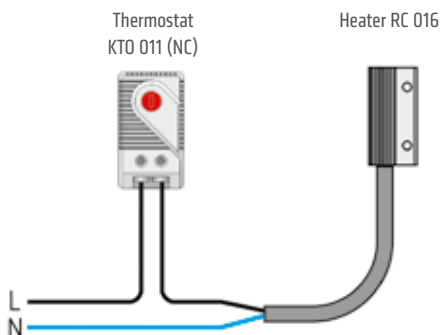


Art. No. 01602.0-00

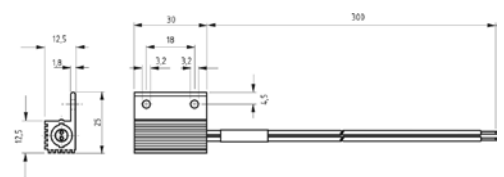

Art. No. 01609.0-00

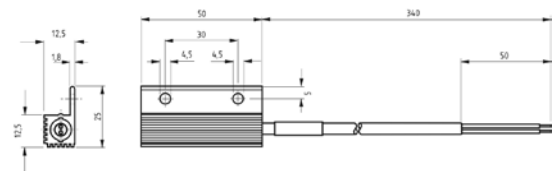

Art. No. 01610.0-00

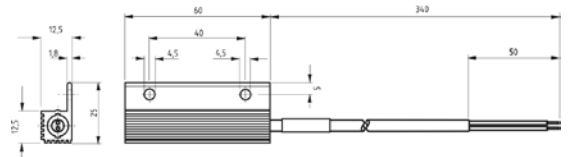

Art. No.	Heating capacity ²	Inrush current max.	Recommended pre-fuse T (time-delay)	Surface temperature (approx.)	Connection	Weight (approx.)
01602.0-00	8 W	2.0 A	2.0 A	+150 °C	2 x AWG 18 stranded wire	20 g
01609.0-00	10 W	2.5 A	4.0 A	+155 °C	2 x AWG 22 cable (silicone)	30 g
01610.0-00	13 W	3.0 A	4.0 A	+170 °C	2 x AWG 22 cable (silicone)	40 g

² at +20 °C (+68 °F) ambient temperature