

NTC Thermistors, Standard Lug Sensors



QUICK REFERENCE DATA		
PARAMETER	VALUE	UNIT
Resistance value at 25 °C ⁽¹⁾	10K	Ω
Tolerance on R_{25} -value ⁽¹⁾	± 5	%
$B_{25/85}$ -value	3984	K
Tolerance on $B_{25/85}$ -value	± 0.5	%
Operating temperature range at:		
Zero dissipation	- 40 to + 150	°C
Maximum dissipation	0 to + 55	
Dissipation factor ⁽²⁾	≈ 23	mW/K
Thermal time constant ⁽²⁾	≈ 7.5	s
Min. dielectric withstanding voltage between terminals and lug	1500 (1 s)	V _{AC}
Insulation resistance between terminals and lug at 500 V _{DC}	min. 100	MΩ
Climatic category (LCT/UCT/days)	55/150/56	
Weight	≈ 2	g

Notes

- ⁽¹⁾ Other R_{25} -values and tolerances are available upon request
⁽²⁾ Measured with screw mounted on an aluminium heatsink of 100 cm², thickness 1.5 mm, in still air at $T_{amb} = + 25$ °C

PACKAGING

The thermistors are packed in cardboard boxes; the smallest packaging quantity is 500 units.

MOUNTING

By means of M3 screw. Leads to be soldered or crimped.

FEATURES

- Easy mounting using ring tongue terminal
- Rugged construction
- PTFE insulation, AWG # 24
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC




RoHS
COMPLIANT

APPLICATIONS

- Suitable for surface sensing applications, especially when a good electrical insulation and a good thermal contact with the chassis is required.
- Thermistor with negative temperature coefficient and two stranded PTFE insulated copper leads.
- The device is mounted inside the barrel of the ring tongue terminal.

DIMENSIONS

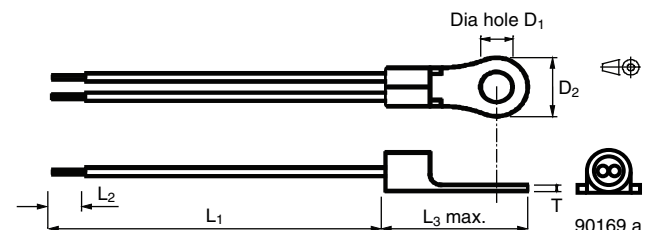

$$L_1 = 38.1 \text{ mm} \pm 3.8 \text{ mm}$$

$$L_2 = 3.81 \text{ mm} \pm 0.64 \text{ mm}$$

$$\text{For info: } D_1 = 3.68 \text{ mm, } D_2 = 7.14 \text{ mm, } L_3 = 16.26 \text{ mm, } T = 1.016 \text{ mm}$$

Notes

- The device is suitable for screwing e.g. on metal surface
- The leads are suitable for soldering e.g. on PCB
- The thermistor chip NTC is epoxy coated and attached to the metal lug via a middle buffer layer
- Metal ring lug is tinned copper
- Insulated leads: AWG # 24 stranded, PTFE insulation
- Lead wire end twisted and tinned, other lead length and insulation, available on request

DESIGNERS TOOL

- Other resistance curves and tolerances are available on request
- Consult Vishay for other lead length, other connector crimping or other features
- 3D solid models: www.vishay.com/doc?29106
- NTC curve computation: www.vishay.com/resistors-non-linear/curve-computation-list/

ELECTRICAL DATA AND ORDERING INFORMATION				
R_{25} (kΩ)	$B_{25/85}$ -VALUE	TCR (%/K)	SAP MATERIAL AND ORDERING NUMBER NTCALUGE2.....	OLD 12NC CODE 2381 645
10	3984K ± 0.5 %	- 4.37	C90169	90169



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[NTCALUGE2C90169](#)