




# Miniature solenoid valves

LCIE notification  
no. LCIE 03 ATEX Q8002

EC Type Examination Certificate LCIE 02 ATEX 6122X  
Conforming to the Low Voltage Directive 73/23/EEC  
modified by Directive 93/68/EEC

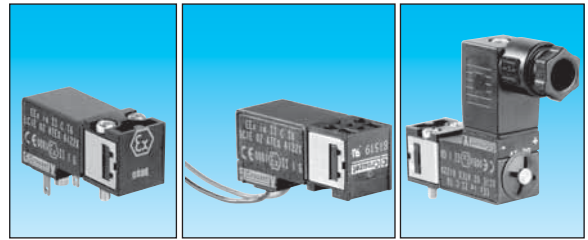

Type		Terminal	Wire	Connector
Degree of protection (CEI 529)		IP 20		IP 65
Classification		CE Ex II 1 G Ex ia II C T6		CE Ex II 1 GD Ex ia II C T6 Ex ia D20T80°C
	Voltage			
	Max. power consumption			
	Manual override			
U nominale				
Power source (barrier or interface output) between 5 and 18 Vdc	12 Vdc	0.70 W	Without	
			Impulse	81 519 034
			Maintained	81 519 334
				81 519 634
U nominale				
Power source (barrier or interface output) between 12 and 28 Vdc	24 Vdc	0.70 W	Without	
			Impulse	81 519 035
			Maintained	81 519 335
				81 519 635
Function			3/2 NC	

## Symbols



## Characteristics

Permitted fluids	Wiretered 50 µ, lubricated (ASTM2) or no		air or inert gases
Working pressure		bars	1 → 7
Orifice diameter		mm	0.5
Flow at 6 bars		NL/mn	12
Flow rate		KV	0.12
Operating temperature		°C	- 10 at + 50
Switching time		ms	8 at 15
Mechanical life (at 4 bars and 20°C)		operations	≤ 1.5 · 10 <sup>7</sup>
Construction	st. steel, NBR brass, PA 66		
Duty factor			100% ED
Insulation class		CEI 85	F
Weight		g	35      38      45

## Pneumatic connections

On Valve modules			types 81 513 196 /234 /612
			types 81 516 107 /208

## Electrical connections

	2 Terminals	2 Wires	Connector
With 4 possible positions	•	•	•
Via modular sub-bases	81 513 075 /076	—	—
Via wires - 300 mm long - cross-section 0.22 mm <sup>2</sup>	81 517 106 /206	—	—
	—	•	—





## Dimensions

**Terminals**  
81 519 034    81 519 035  
81 519 334    81 519 335  
81 519 634    81 519 635

**Wires**  
81 519 037

**Connectors** 81 519 047    81 519 048  
81 519 347    81 519 348  
81 519 647    81 519 648

15 x 15 mm footprint  
According to CNOMO E 06-36-120V

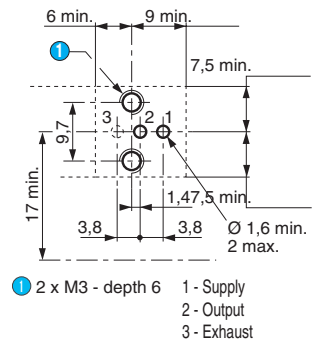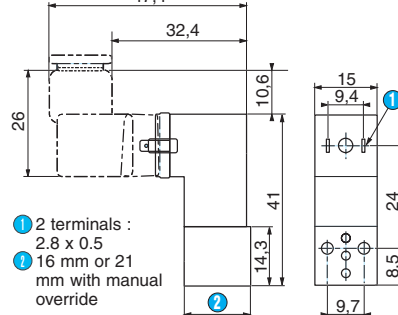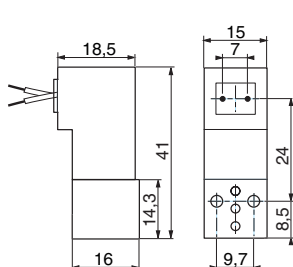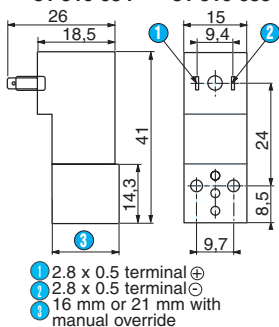

## Other information

**Note:**  
Our IP20 miniature solenoid valves (except for those using wire connections) have a location-coding pin, which prevents them from being mounted on our standard sub-bases. They must only be used with the sub-bases mentioned on page 8 of this catalogue.  
If they are being installed with a separate electrical connector, only our 81 516 082 connector should be used in order to comply with safety level EEx ia II C T6.


To order an Ex product, you must complete the form on page 53.



# Miniature solenoid valves

## Important

These ATEX miniature solenoid valves must be connected individually to an approved safety barrier. Placed in a safe zone, these safety barriers can be used to supply ATEX miniature solenoid valves installed in a hazardous zone.

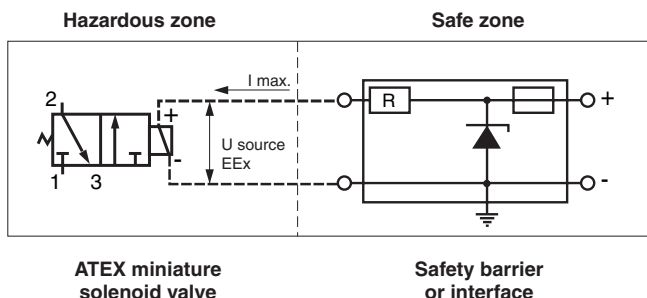

### Specifications for loop calculation

	12 Vdc	24 Vdc
	81519034 81519047	81519035 81519037 81519048
	81519334 81519347	81519335 81519348
	81519634 81519647	81519635 81519648
U source EEx	< 18 V	< 28 V
I <sub>max</sub> / coil	< 74 mA	< 37 mA
C <sub>int</sub>	0	0
R at + 20° C	147 Ohm+/-7 %	580 Ohm+/-7 %
R at - 10° C	> 119 Ohm	> 476 Ohm
R at + 50° C	< 174 Ohm	< 690 Ohm

U source EEx = intrinsically safe power source at the terminals of the miniature solenoid valve

I<sub>max</sub>/coil = maximum current through the coil

C<sub>int</sub> = internal capacity of the solenoid valve

R = internal resistance of the solenoid valve

The electrical connection between the safety barrier (or interface) and the miniature solenoid valve can be made using ordinary wires or cables. The inductance of the connecting line between the safety barrier and the miniature solenoid valve must be less than 0.5 mH.

## Recommended barriers and interfaces

These safety barriers and interfaces, recommended by CROUZET, should be obtained from one of the manufacturers indicated below, specifying that they are to be used to supply power to miniature solenoid valves Type 81 519, CE 0081 II 1 G, approval no. LCIE 02 ATEX 6122 X OR type 81 519, CE 0081 II 1 GD, approval no. LCIE 02 ATEX 6122 X.

Crouzet product	Barriers / Interface	Group of Gas	Part number	Manufacturer	Certificate	Um (V)	I <sub>cc</sub> (mA)	C (nC)	L (mH)	Loop calculation	Barrier supply voltage
12 Vdc	Barriers	IIC	BZC13/100/1/179	Georgin	O1ATEX 6070X	17.6	124	300	2.2	conforms	12 Vdc +/-10%
	Barriers	IIC	MTL 7715+	MTL	BASO1ATEX 7217	15	150	580	1.45	conforms	12 Vdc+10% : -15%
24 Vdc	Barriers	IIC	24/50/1/A1	Georgin	O1ATEX 6070X	28	93	83	4.4	conforms	24 Vdc +/-10%
	Barriers	IIC	MTL 7728+	MTL	BASO1ATEX 7217	28	93	83	1.82	conforms	20 to 26,6 Vdc
	Interface	IIC	BXNE 09	Georgin	O2ATEX 6104X	23.5	64	13200	9	conforms	24 dc +/-10%

**CAUTION:** When being used in zone 0 a system certificate supplied by an approved body must be obtained. In zones 1 and 2, the system integrity should be checked with a loop calculation; given that our product C = 0, cable C must be less than barrier C.




# Valve modules in potentially explosive atmospheres ATEX Directive 94/9/EC

FILE No. C.PN.HOM.00004.FR  
INERIS No. 17564/04  
for 81 516 107 and 81 516 208


FILE No. C.PN.HOM.00005.FR  
INERIS No. 17567/04  
for 81 513 196, 81 513 612 and 81 513 234

Equipment intended for use in potentially explosive atmospheres conforming to Directive 94/9/EC

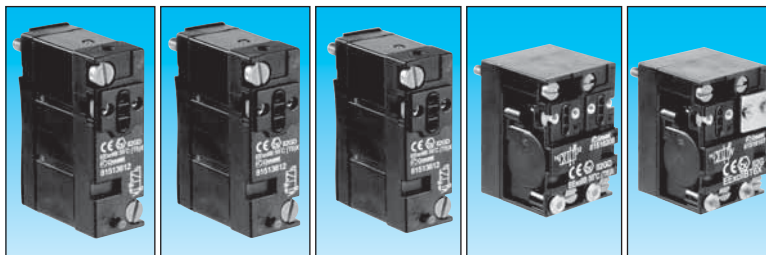

Type	3/2 NC monostable	3/2 NO monostable	4/2 monostable	4/2 bistable	4/2 monostable
Classification	81 513 196	81 513 612	81 513 234	81 516 208	81 516 107
Symbol	CE $\text{Ex}$ II 2 GD c II B 55°C T6X				CE $\text{Ex}$ II 2 G c II B 55°C T6X

## Symbol

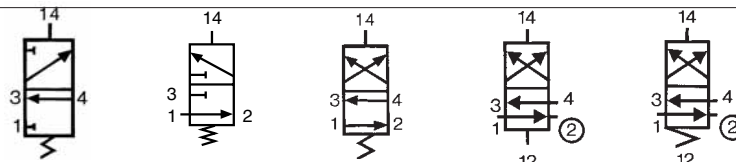


## Characteristics

Width	mm	17.5	17.5	17.5	35	35	
Working pressure	bars	3-8	3-8	3-8	2-8	3.5-8	
Orifice diameter	mm	3	3	3	4	4	
Flow at 6 bars	with $\varnothing$ 4 mm sub-base (page 44) with $\varnothing$ 6 mm sub-base (page 44)	Nl/min	200	200	200	300	300
Flow Rate	with $\varnothing$ 4 mm sub-base (page 44) with $\varnothing$ 6 mm sub-base (page 44)	kV	2.2	2.2	2.2	4	4
Operating temperature	°C	-10 at +50	-10 at +50	-10 at +50	-10 at +50	-10 at +50	
Switching time for the valve only	ms	15	15	15	50	50	
Mechanical life	operations	$1.5 \times 10^7$	$1.5 \times 10^7$	$1.5 \times 10^7$	$10^7$	$10^7$	
Weight	g	38	38	38	106	106	

## Valve module footprint (pitch 17.5 mm)


81 513 196 - 81 513 234 - 81 513 612

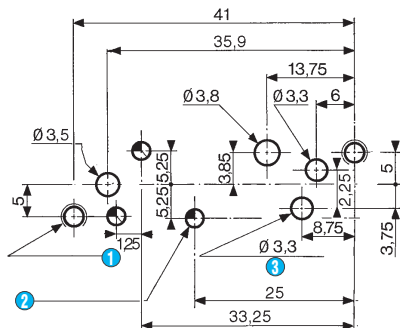

- ① 2 M4 holes – depth of thread: 10 mm min.
- ② 3  $\varnothing$  2.8 holes - depth: 3
- ③ 4/2 only

## Valve module footprint (pitch 35 mm)


81 516 107 - 81 516 208

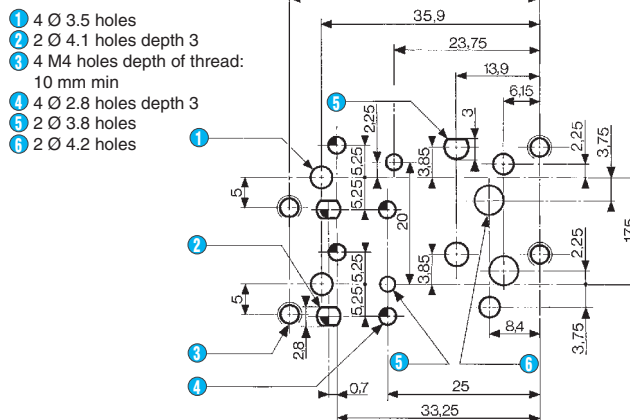


- ① 4  $\varnothing$  3.5 holes
- ② 2  $\varnothing$  4.1 holes depth 3
- ③ 4 M4 holes depth of thread: 10 mm min
- ④ 4  $\varnothing$  2.8 holes depth 3
- ⑤ 2  $\varnothing$  3.8 holes
- ⑥ 2  $\varnothing$  4.2 holes

## Dimensions

81 513

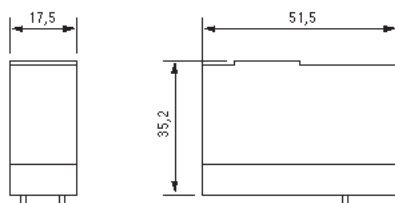

81 516

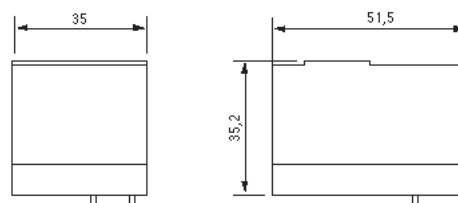

## Other information

If mounted in a bank, this should consist of no more than four 81 516 107/208 products or no more than eight 81 513 196/234/612 products

To order an  $\text{Ex}$  product, you must complete the form on page 53.