



Applications	Commercial Grade	
Feature	Shield Magnetic Shield Multilayer Ferrite Core Ferrite Core	
Series Type	MLF	
Status	Production	
Brand	ТДК	

Size		
Length(L)	2.00mm ±0.20mm	
Width(W)	1.25mm ±0.20mm	
Thickness Height	0.85mm ±0.20mm	
Recommended Land Pattern (A)	0.80mm Nom.	
Recommended Land Pattern (B)	1.00mm Nom.	
Recommended Land Pattern (C)	1.20mm Nom.	

Electrical Characteristics				
Inductance	270nH ±5% at 25MHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]				
Rated Current (Temperature Rise) [Typ.]				
Rated Current (Temperature Rise) [Max.]	250mA			
DC Resistance [Typ.]	180mΩ			
DC Resistance [Max.]	350mΩ			
Self Resonant Frequency [Min.]	220MHz			
Self Resonant Frequency [Typ.]	300MHz			
Q [Min.]	20			
Q [Typ.]	30			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C		
Soldoring Mothed	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	Νο		
Packing	Punched (Paper)Taping [180mm Reel]		
Package Quantity	4000pcs		
Weight	0.01g		

I images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



MLF2012DR27JT000



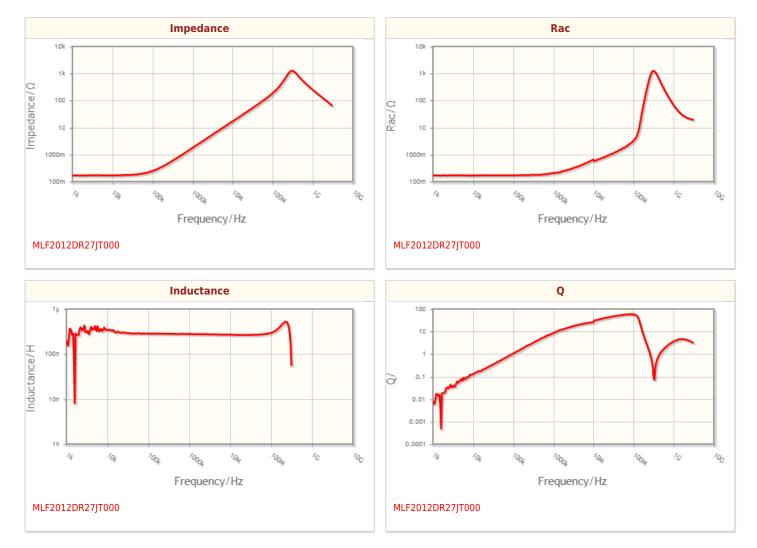

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.





Associated Images

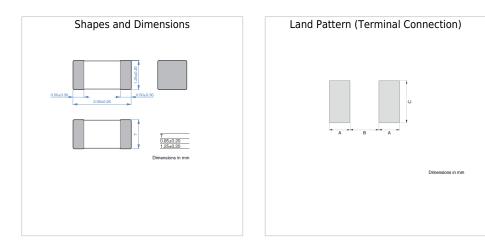

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.