

Surface Mount Type **SP-Cap**

Series: **GX** (Super Low ESR Products)




■ Features

- Large capacitance (560 μF max.)
- Super Low ESR (3 mΩ)
- Low ESL (3-terminals : 50 % less than 2-terminals) [Suffix : L]
- RoHS directive compliant

■ Specifications

Series & Size Code	GX	
Category Temp. Range	-55 °C to +105 °C	
Rated Voltage Range	2 V.DC to 2.5 V.DC	
Nominal Cap.Range	330 μF to 560 μF	
Capacitance Tolerance	±20 % (120 Hz/+20 °C)	
DC Leakage Current	I ≤ 0.1 CV (μA) 2 minutes	
tan δ	≤ 0.06 (120 Hz/+20 °C)	
Surge Voltage	Rated Voltage × 1.25 (15 °C to 35 °C)	
Endurance	After applying rated voltage for 2000 hours at 105 °C±2 °C, and then being stabilized at +20 °C, capacitor shall meet the following limits.	
	Capacitance change	±20% of initial measured value
	tan δ	≤ 200 % of initial specified value
Moisture resistance	After storing for 500 hours at 60 °C, 90 %	
	Capacitance change of initial measured value	2 V.DC to 2.5 V.DC
		+70, -20 %
	tan δ	≤ 200 % of initial specified value
DC leakage current	≤ Initial specified value	

■ Marking

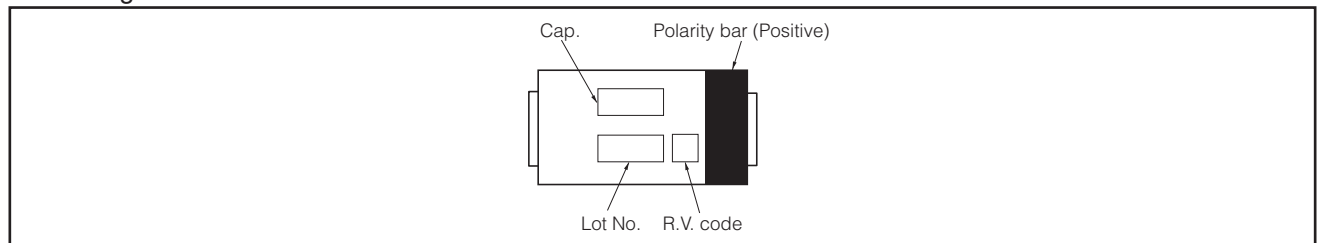

■ Dimensions in mm(not to scale)

(Unit : mm)

(Unit : mm)

2 terminals

L±0.2	W1±0.2	W2±0.1	H±0.1	P±0.3
7.3	4.3	2.4	1.9	1.3

* Externals of figure are the reference.

3 terminals

L±0.2	W1±0.2	W2±0.1	H±0.1	P1±0.3	P2±0.1	P3±0.2	P4±0.2
7.3	4.3	2.4	1.9	1.3	1.1	0.7	1.4

* Externals of figure are the reference.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Standard Products

Reflow *3 <Standard>

Series & Size Code	Rated Voltage (V.DC)	Capacitance (±20 %) (μF)	Case Size			Specification		The number of terminals		Part number	*4 Min. Packaging Q'ty (pcs)
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (mΩ max.)	2	3		
GX	2	330	7.3	4.3	1.9	10.2	3	○		EEFGX0D331R	3500
		470	7.3	4.3	1.9	10.2	3	○		EEFGX0D471R	3500
			7.3	4.3	1.9	10.2	3		○	EEFGX0D471L	3500
		560	7.3	4.3	1.9	10.2	3	○		EEFGX0D561R	3500
			7.3	4.3	1.9	10.2	3		○	EEFGX0D561L	3500
	2.5	470	7.3	4.3	1.9	10.2	3	○		EEFGX0E471R	3500
			7.3	4.3	1.9	10.2	3		○	EEFGX0E471L	3500

*1: Ripple current (100 kHz/ +45 °C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please contact us when 500 pcs packing is necessary.

Temperature Compensation Multipliers for Ripple Current		
T ≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
1.0	0.7	0.25