




Max. Temperature : 260° during 10 seconds

D	09551663812.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2	EC01199	11Jan2010	ED	Detail.	30Jun2006	ED	<p>All Dim. in mm Orig. Size DIN A 4</p>	D-SUB SMT Standard Male 9p with die casted grounds and nuts	Maßstab/ Scale  1,5:1					
	09551666812.741	2				34399	22Aug2007	ED	Insp.										
	09551667812.741	3				33929	25Jan2007	ED	Stand.										
	09551663811.741	1				M3	33787	17Jul2006	ED	HARTING EURL F-95972 Paris					TB 09 55 166 x81x	Blatt/ Page 1 / 2			
	09551666811.741	2															33773	30Jun2006	ED
	09551667811.741	3																	
	Part number	PL	Thread	Index designation	Mod.	Dot.	Name			Sub.									

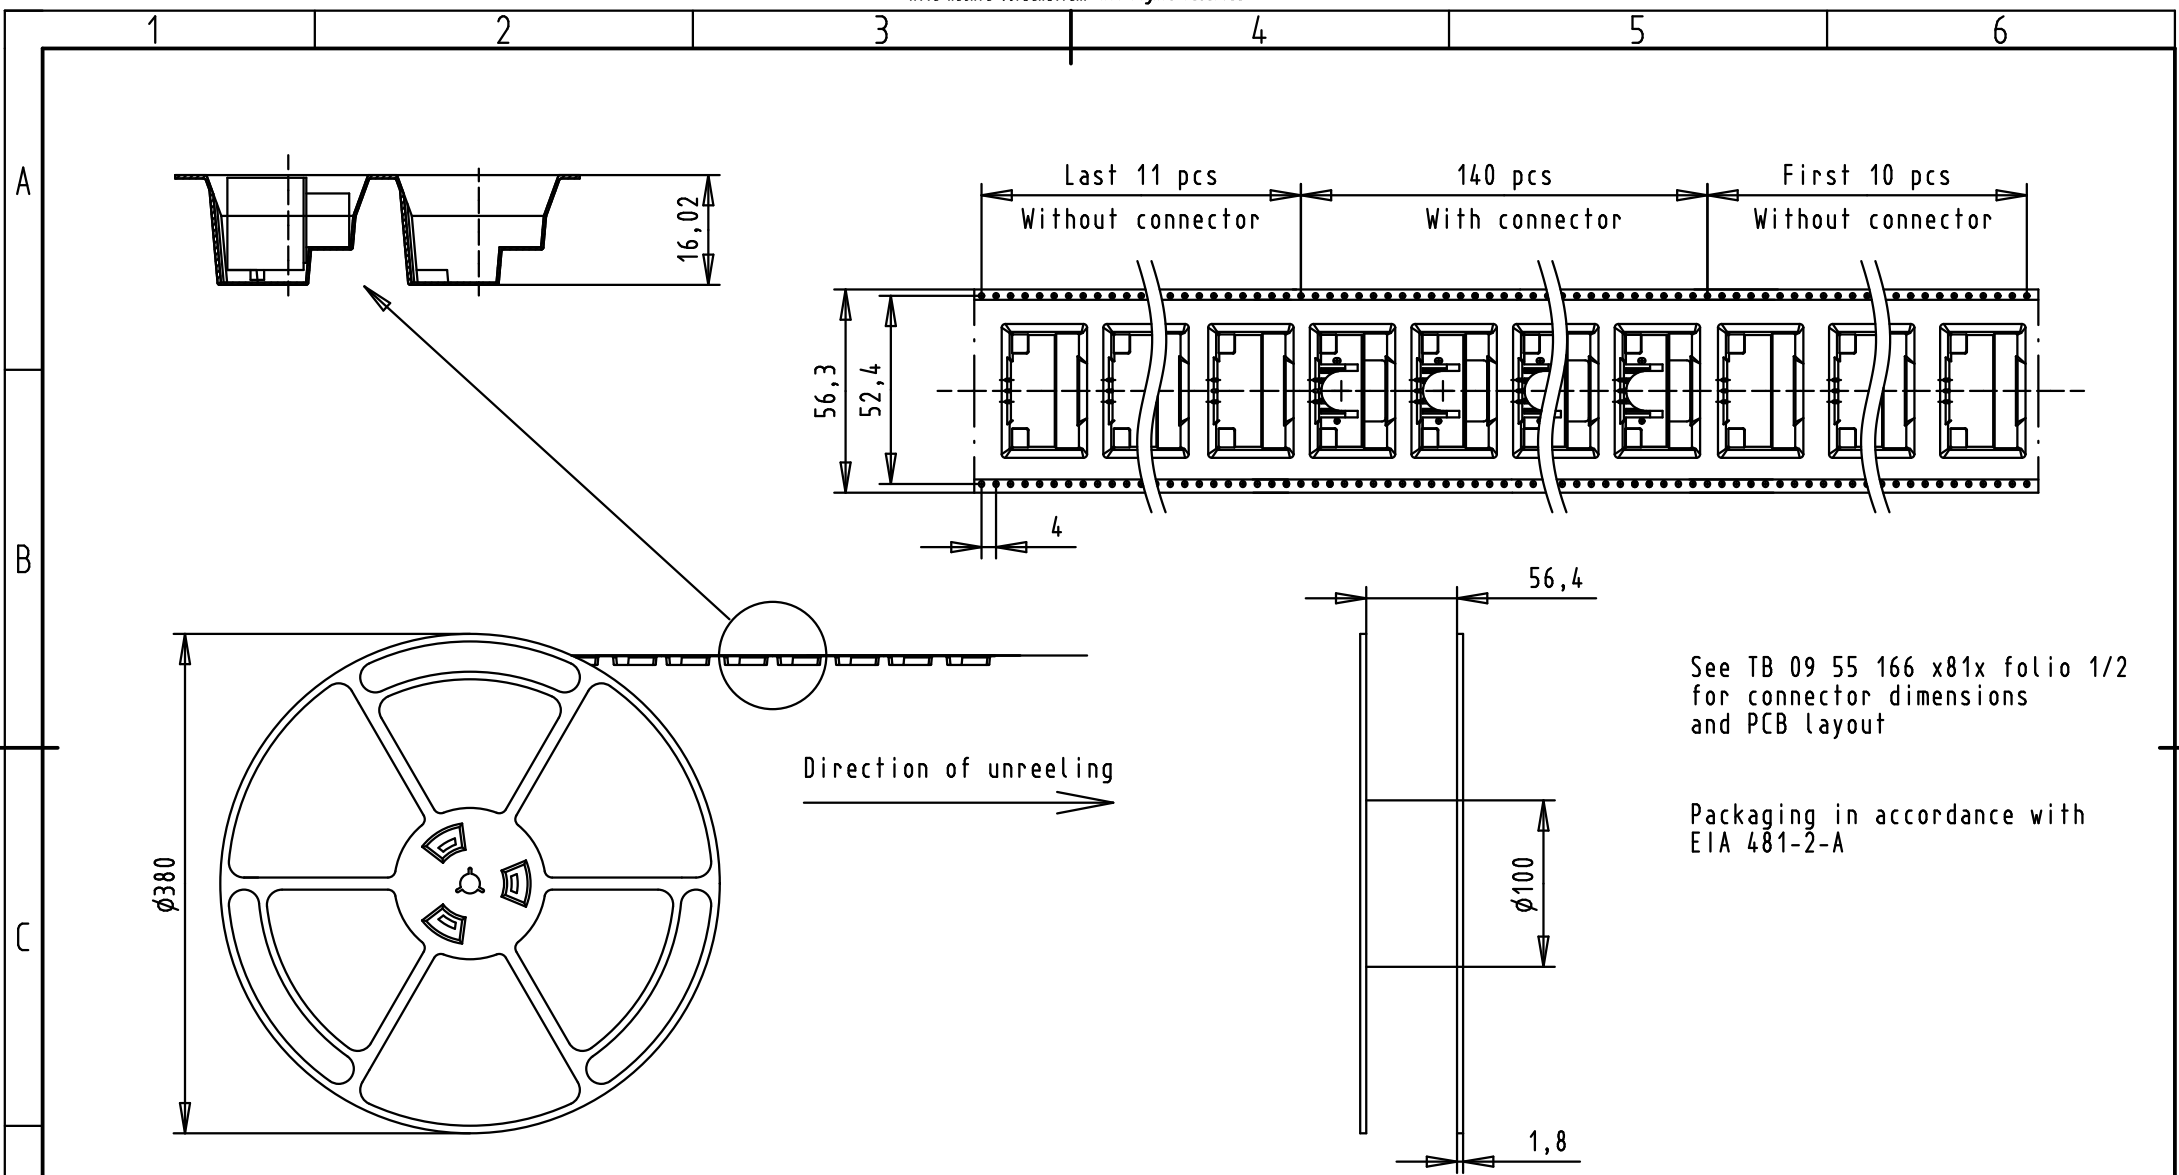

See TB 09 55 166 x81x folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551663812.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors)	EC01199	11Jan2010	ED		Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Male 9p with die casted grounds and nuts	Maßstab/ Scale
09551666812.741	2				EC01118	26Nov2009	LP	Detail.	17Jul2006	ED			
09551667812.741	3				34399	22Aug2007	ED	Insp.					
09551663811.741	1	M3			33975	02Apr2007	ED	Stand.				TB 09 55 166 x81x	Blatt/ Page 2 / 2
09551666811.741	2				33929	25Jan2007	ED	HARTING EURL		Sub.			
09551667811.741	3				33785	17Jul2006	ED	F-95972 Paris					
Part number	PL	Thread	Index designation		Mod.	Dot.	Name						