


RECOMMENDED HOLE LAYOUT

А

С

В

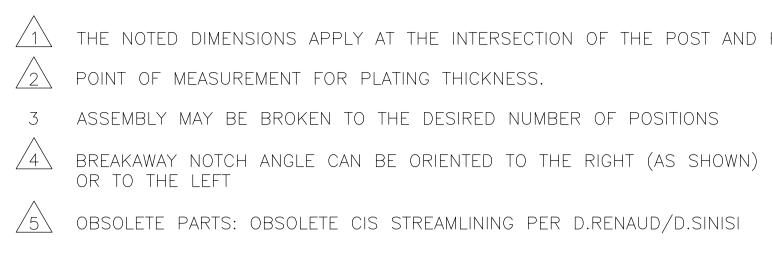

THIS DRAWING IS A DIMENSIONS: INCHES (IATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK POST: COPPER ALLOY

	2								
LOC	DIST				REVISIONS	5			
AD	00	P	LTR		DESCRIPTION		DATE	DWN	APVD
	•		G	REVISED PER E	CO-14-000068	5	23APR2014	NK	MM

1 The noted dimensions apply at the intersection of the post and housing

3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

0BSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		3.984	3.900	39	80	4-103149-0		
		3.884	3.800	38	78	-3-103149-9		
	<u>/5\</u> obsolete	3.784	3.700	37	76	-3-103149-8		
		3.684	3.600	36	74	-3-103149-7		
SUPERSEDED BY	/ 8-146308-6	3.584	3.500	35	72	-3-103149-6		
<u> </u>		3.484	3.400	34	70	-3-103149-5		
		3.384		33	68	-3-103149-4		
	A	3.284		32	66	-3-103149-3		
	OBSOLETE	3.184		31	64	-3-103149-2		
		3.084		30	62	-3-103149-1		
		2.984	2.900	29	60	-3-103149-0		
		2.884	2.800	28	58	-2-103149-9		
		2.784	2.700	20	56			
			2.600	26		2-103149-8		
		2.684			54	2-103149-7		
		2.584	2.500	25	52	2-103149-6		
	A	2.484		24	50	2-103149-5		
	OBSOLETE	2.384		23	48	2-103149-4		
		2.284	2.200	22	46	2-103149-3		
		2.184	2.100	21	44	2-103149-2		
		2.084	2.000	20	42	2-103149-1		
		1.984	1.900	19	40	2-103149-0		
	1	1.884	1.800	18	38	1-103149-9		
	OBSOLETE	1.784	1.700	17	36	1-103149-8		
		1.684	1.600	16	34	1-103149-7		
	6 OBSOLETE	1.584	1.500	15	32	1-103149-6		
		1.484	1.400	14	30	1-103149-5		
	6 OBSOLETE	1.384	1.300	13	28	1-103149-4		
	<u> </u>	1.284	1.200	12	26	1-103149-3		
	A	1.184	1.100	1 1	24	1-103149-2		
	OBSOLETE	1.084	1.000	10	22	1-103149-1		
		.984	.900	9	20	1-103149-0		
	6 OBSOLETE	.884	.800	8	18	103149-9		
	/ 0 \	.784	.700	7	16	103149-8		
		.684	.600	6	14	103149-7		
		.584	.500	5	12	103149-6		
		.484	.400	4	10	103149-5		
	BOBSOLETE		.300	3	8	103149-4		
	<u>/JNODJOLLIL</u>	.284	.200	2	6	103149-3		
SUPERSEDED BY	5-1/6308 2	.184	.100	1	4	103149-3		
VON SALEKSEDED RI	A [.084			2			
	5 OBSOLETE				۷	-103149-1		
					NO	ASSEMBLY		
		С	B	A	OF	PART		
					POSN	NUMBER		
	DWN	230CT87						
A CONTROLLED DOCUMENT.	H MOLL	230CT87		E TE	TE C	onnectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	T. CLARK	290CT87 NAME						
		HEADER ASSY, MOD II, BREAKAWAY, Double Row, .100x.100 €, Right						
0 PLC \pm - 1 PLC \pm -								
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	APPLICATION SPEC		ANGLE, WITH .025 SQ POSTS					
4 PLC ± – ANGLES ± – FINISH :POST:		SIZI						
DANT .000030 GOLD IN THE CONTACT IC, AREA, .000100000200 MATTE	WEIGHT	[A	A - C - 103149					
Y TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL	CUSTOMER DRA	WING		SC,	4:1 SH	eet of Rev G		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 103149-8