# A/L UNIV HDR 10P VERT LG LAT - ACTIVE


AMP-LATCH | AMP-LATCH Universal Headers

TE Part # 5499922-1 TE Internal #: 5499922-1

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors

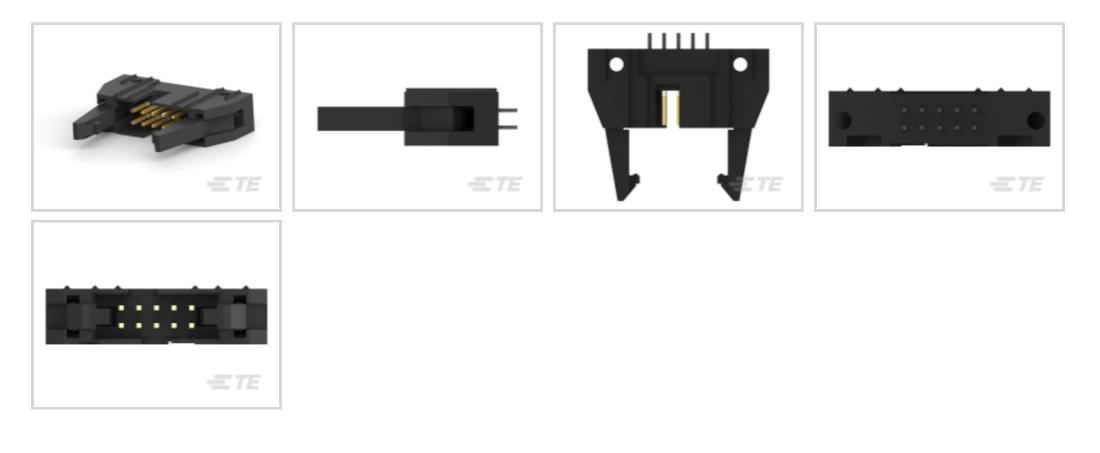

Connector System: Wire-to-Board

Number of Positions: 10

Centerline (Pitch): 2.54 mm [.1 in]

PCB Mount Retention: Without

PCB Mount Retention Type: Mounting Ears

#### Features

#### **Product Type Features**

Product Type	Connector
Latch Type	Long
Board Standoff	Without
Connector Type	Header
Header Type	Universal Ejection Pin Headers
Connector System	Wire-to-Board
Row-to-Row Spacing	2.54 mm[.1 in]
Connector Style	Plug
Profile	Standard
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Ejection Latches	With
Number of Positions	10
PCB Mount Orientation	Vertical
Number of Rows	2

TE Part # 5499922-1 TE Internal #: 5499922-1



#### **Electrical Characteristics**

Insulation Resistance	5000 MΩ
Operating Voltage	250 VAC
Body Features	
Post Size	.64 mm[.025 in]
Contact Features	
	15 µin
Contact Termination Area Plating Material	Tin
Contact Transmits (Typical)	Signal (Data)
Contact Termination Area Plating Thickness	2.54 µm
Contact Type	Pin
Contact Mating Area Plating Material	Gold
Contact Shape	Square
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass, Phosphor Bronze
Contact Current Rating (Max)	1 A

#### **Termination Features**

Termination Post Length	2.79 mm[.11 in]
Termination Method to Printed Circuit Board	Through Hole
Mechanical Attachment	
Polarization	With
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
PCB Mount Retention Type	Mounting Ears
Mating Alignment Type	Center, Dual Polarizing Bar
Mating Connector Lock	With
Mating Connector Lock Type	Latch
Connector Mounting Type	Board Mount
Housing Features	

**C** For support call+1 800 522 6752

TE Part # 5499922-1 TE Internal #: 5499922-1



Housing Style	4-Sided
Housing Material	Glass Filled Nylon/Polyester
Housing Color	Black
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
	1.26 in
Height	13.94 mm[.549 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Shrouded End Dimension	3.81 mm[.15 in]
Usage Conditions	
Temperature Rating	Standard
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	

Packaging Quantity	18
Packaging Method	Tray
Other	
Comment	Pin headers in 10- and 14-position sizes have only one slot for snap-in polarizer (military polarization), located as shown., Pin headers in 10-position size have only slot for dual polarization, located as shown.
Product Compliance For compliance documentation, visit the product page on TE.com>	
•	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

TE Part # 5499922-1 TE Internal #: 5499922-1



Halogen Content

Solder Process Capability

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**





# Also in the Series | AMP-LATCH Universal Headers

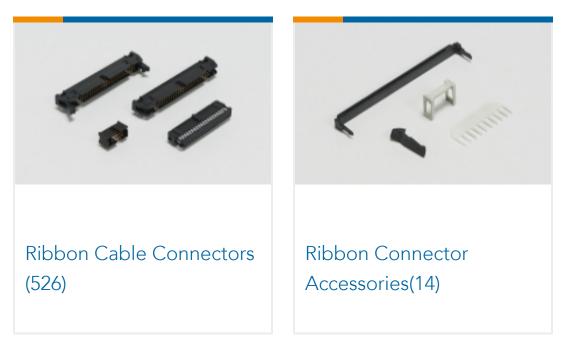

**Customers Also Bought** 

TE Part # 5499922-1 TE Internal #: 5499922-1





#### Documents

Product Drawings A/L UNIV HDR 10P VERT LG LAT

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_5499922-1\_A.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_5499922-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5499922-1\_A.3d\_stp.zip

English

Datasheets & Catalog Pages Ribbon Cable Interconnect Solutions

TE Part # 5499922-1 TE Internal #: 5499922-1



English

7-1773458-6\_AMPLATCH\_QRG

English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance TE Material Declaration

English