


#### MULTI-BEAM

TE Internal #: 2334570-8 Rectangular Power Connectors, Connector Assembly, Receptacle, Board-to-Board, Printed Circuit Board, UL 94V-0, -40 – 125 °C, 60 VAC, 60 VDC

#### View on TE.com >

#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

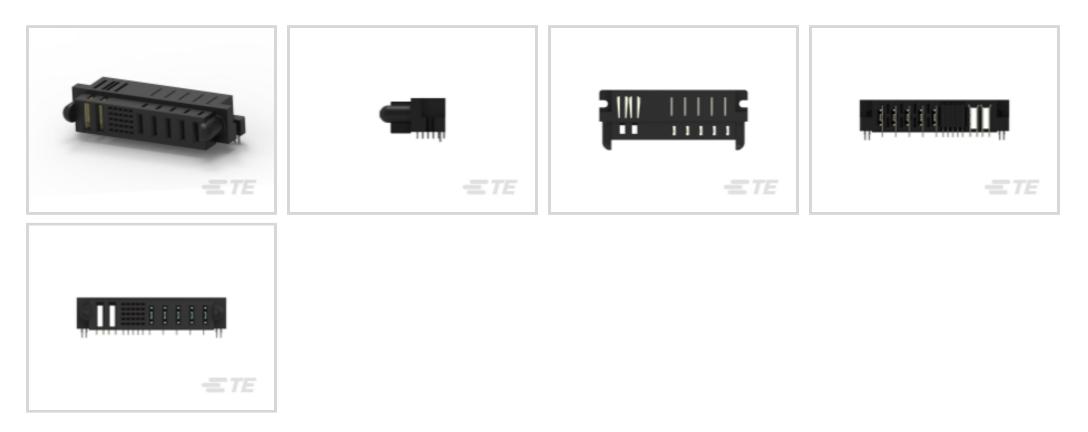

Rectangular Power Connector Type: Connector Assembly

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Connector & Contact Terminates To: Printed Circuit Board

UL Flammability Rating: UL 94V-0

## Features

connectivity

#### **Product Type Features**

Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Horizontal
Number of Power Positions	7
Number of Signal Positions	25
Number of Rows	5
Electrical Characteristics	
Operating Voltage	60 VDC
Contact Features	
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	100 A

### 2334570-8

Rectangular Power Connectors, Connector Assembly, Receptacle, Board-to-Board, Printed Circuit Board, UL 94V-0, -40 – 125 °C, 60 VAC, 60 VDC



Contact Retention Within Housing	With
Contact Type	Receptacle
PCB Contact Termination Area Plating Material	Tin
Housing Features	
Housing Color	Black
Housing Material	LCP GF30 (Liquid Crystal Polymer)
Dimensions	
Row-to-Row Spacing	2 mm
Usage Conditions	
Operating Temperature Range	-40 – 125 °C
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and	l represents our current actual knowledge

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

### 2334570-8

Rectangular Power Connectors, Connector Assembly, Receptacle, Board-to-Board, Printed Circuit Board, UL 94V-0, -40 – 125 °C, 60 VAC, 60 VDC



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# **Customers Also Bought**



## Documents

Product Drawings MBPLUS,R/A,REC.,SOLDER,5LP + 25S + 2P

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2334570-8\_1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2334570-8\_1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2334570-8\_1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the  $\ensuremath{\text{Terms}}$  and  $\ensuremath{\text{Conditions}}$  of use.

#### **Product Specifications**

**C** For support call+1 800 522 6752

## 2334570-8

Rectangular Power Connectors, Connector Assembly, Receptacle, Board-to-Board, Printed Circuit Board, UL 94V-0, -40 – 125 °C, 60 VAC, 60 VDC



Application Specification

English

Product Environmental Compliance Product Compliance English

**Product Compliance** 

English