


# Part No. 1002436

## Vertical Wideband FR4 Embedded LTE / LPWA Antenna

700 / 750 / 850 / 900 / 1800 / 1900 / 2100 MHz

Supports: Broadband LTE (OCTA-BAND), LTE CAT-M, NB-IoT, SigFox, LoRa, Cellular LPWA, RPMA, Firstnet

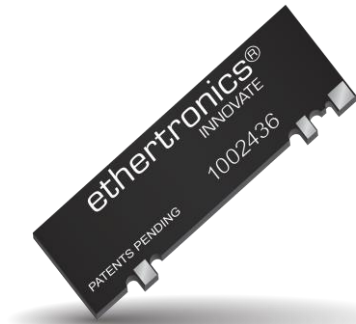

### Vertical Wideband FR4 Embedded LTE / LPWA

Low Band 700 - 960 MHz  
High Band 1700 - 2700 MHz

#### KEY BENEFITS

##### Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

##### Greater Flexibility with Unique Form Factors

Ethertronics' technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

##### Reliability

Comply with latest RoHS requirements

#### APPLICATIONS

- Medical applications
- Home automation
- Smart metering
- M2M, Industrial devices
- IoT
- Firstnet
- Automotive
- Healthcare
- Point of Sale
- Tracking
- Cellular
- 3G Systems

Ethertronics' Vertical Wideband Embedded LTE/LPWA antenna utilizes Isolated Magnetic Dipole™ (IMD) technology which address the challenges facing today's product designers. IMD's high performance and isolation characteristics offer better connectivity and minimal interference. A versatile solution such as the 1002436 FR4 antenna offers support for Broadband LTE, LTE CAT-M, NB-IoT, SigFox, Lora, Cellular LPWA, RPMA applications.

#### Stays in Tune

IMD antenna technology provides superior RF field containment, resulting in less interaction with surrounding components. Ethertronics IMD antennas resist detuning; providing a robust radio link regardless of the usage position

Ethertronics antennas use patented IMD technology in many antenna configurations to provide high performance. IMD antennas requires a smaller design keep-out area, carry lower program development risk which yields a quicker time-to-market, without sacrificing RF performance.

#### Electrical Specifications

Typical Characteristics on 50 x 120 mm ground plane

Frequency	698 - 960 MHz	1710 - 2200 MHz	2500 - 2700 MHz
Efficiency	69%	63%	53%
VSWR	< 3.5:1	< 2.5:1	< 2.5:1
Peak Gain	2.3 dBi	3.2 dBi	3.0 dBi
Polarization	Linear		
Power Handling	2 Watts CW		
Radiation Pattern	Omni-directional		
Feed Point Impedance	50 ohms unbalanced		

#### Mechanical Specifications & Ordering Part Number

Ordering Part #	1002436
Dimensions (mm)	50.6 x 19.6 x 1.6
Weight (grams)	3.05
Mounting	Vertical FR4 antenna with through-hole solder pads
Packaging	5,000 pcs/box
Demo Board	1002436-01




Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Dimensions


Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
1002436	50.6 ± 0.3	19.6 ± 0.3	1.6 ± 0.2

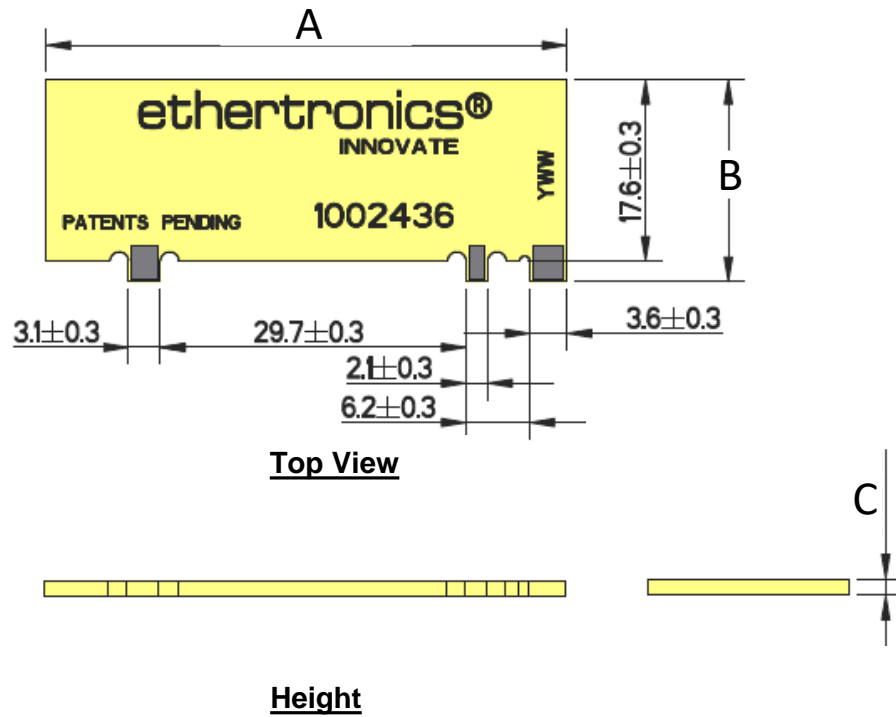

### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Low Band Tuning

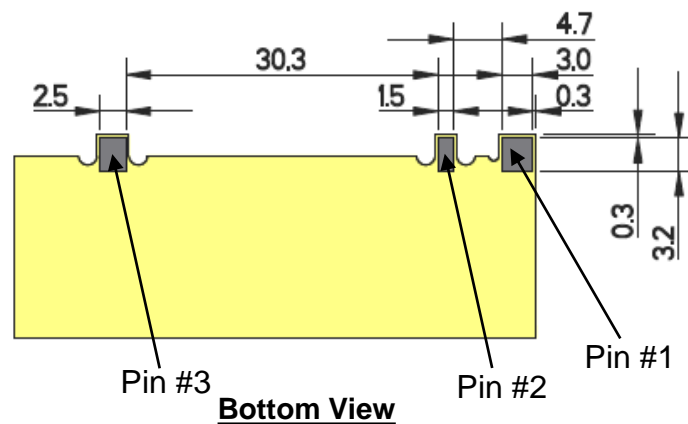




Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


### VSWR and Efficiency Plots

Typical performance on 120 x 50 mm PCB


#### Low Band VSWR

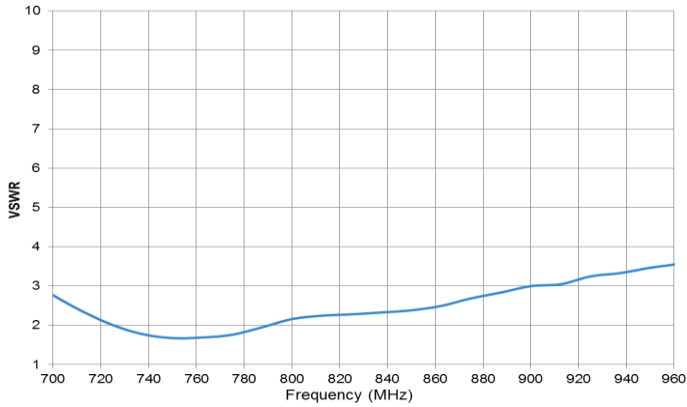


#### Low Band Efficiency

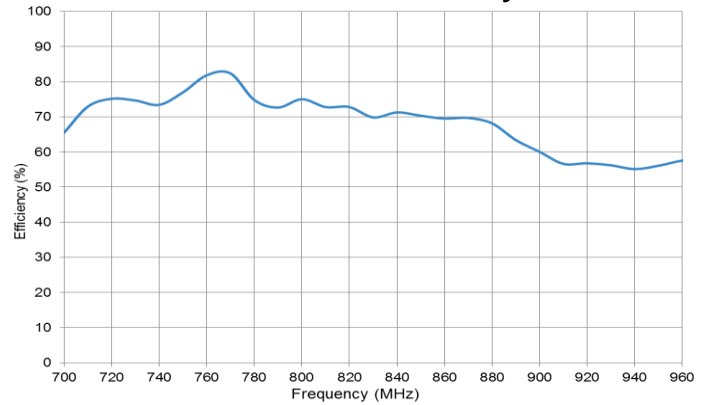


#### High Band VSWR

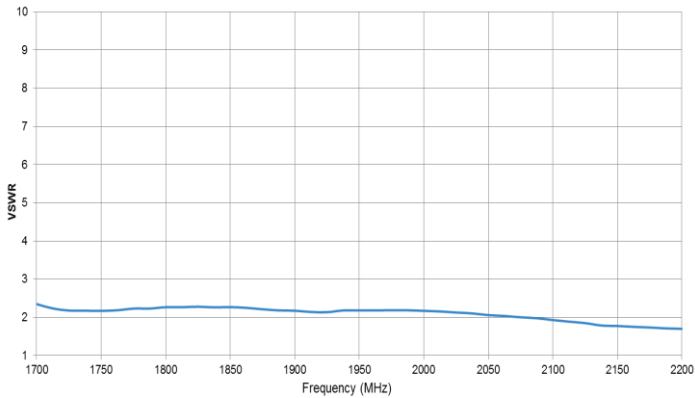


#### High Band Efficiency

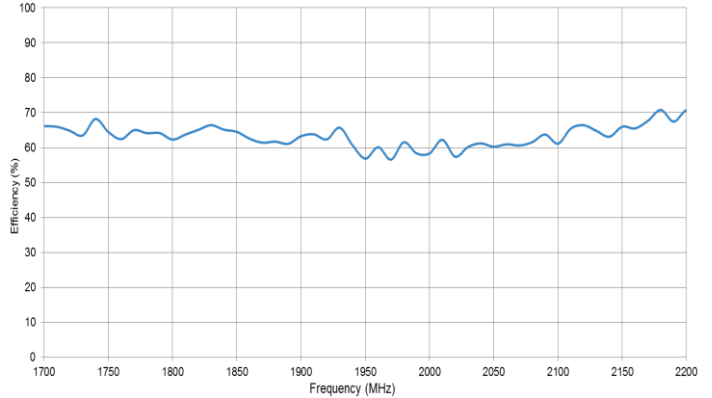

#### High High Band VSWR

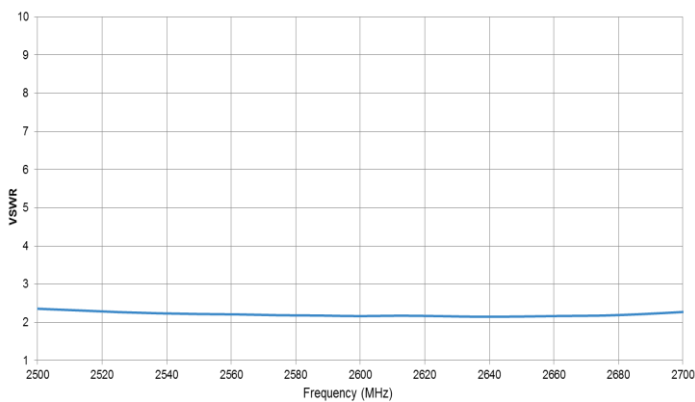

#### High High Band Efficiency

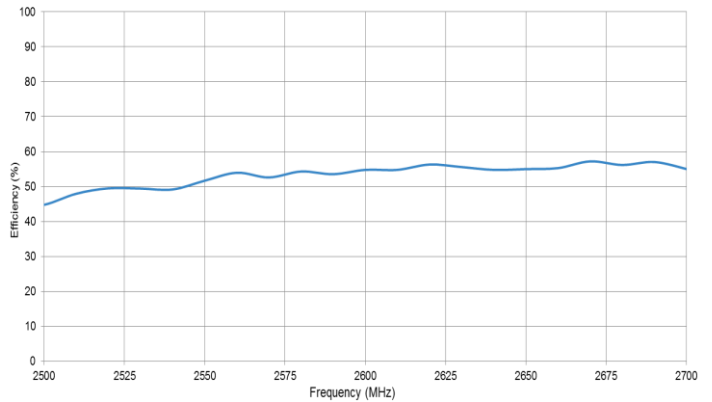







**Broadband LTE Embedded Ethertronics' FR4 Antenna.**  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

**Antenna Radiation Patterns**




Typical performance on 120 x 50 mm PCB  
Measured @ 700, 750, 850, 900, 1710, 1800, 1900, 2150 MHz

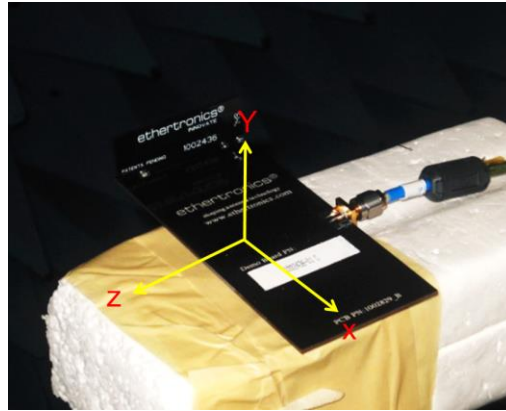

**Low Band Measured at  
700, 750, 850, 900 MHz**

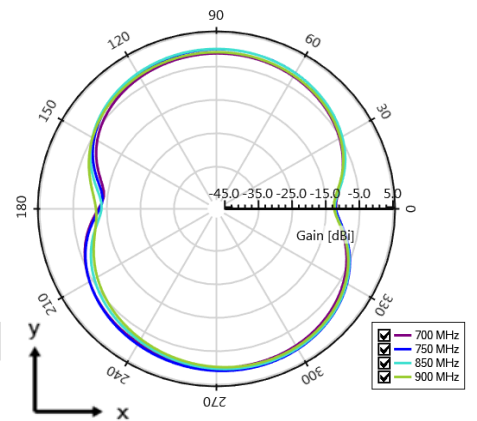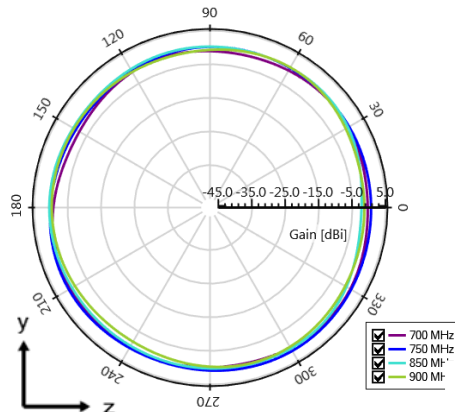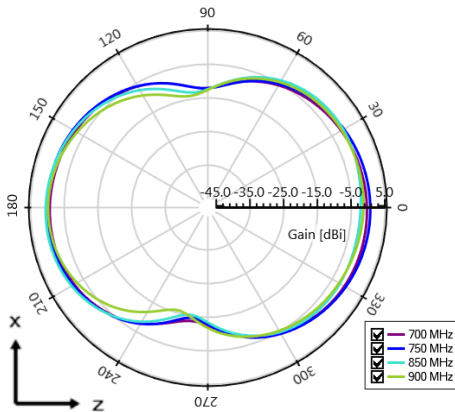

**High Band Measured at  
1710, 1800, 1900, 2150 MHz**

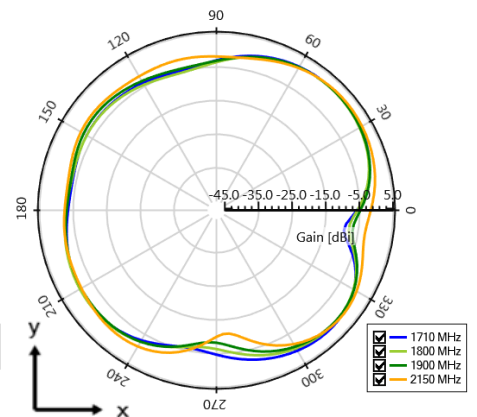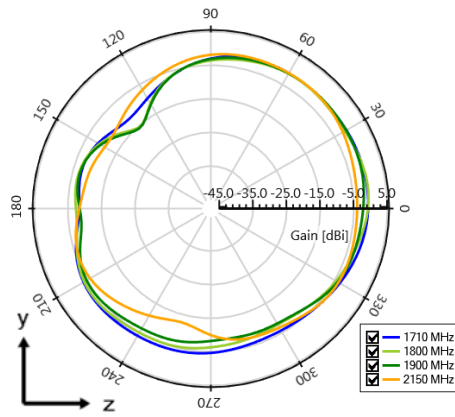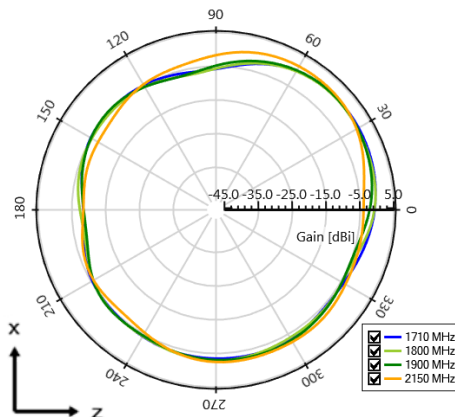







Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Radiation Patterns

Typical performance on 120 x 50 mm PCB  
Measured @ 2500, 2600, 2690 MHz

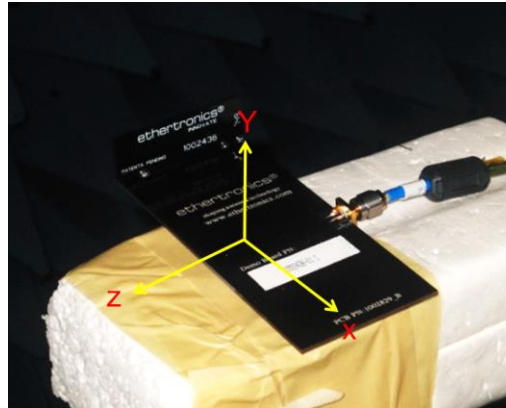

High High Band Measured  
at 2500, 2600, 2690 MHz

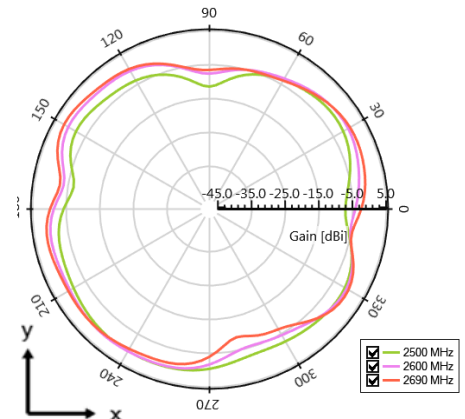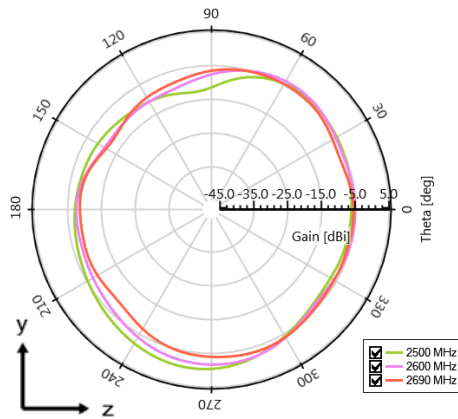
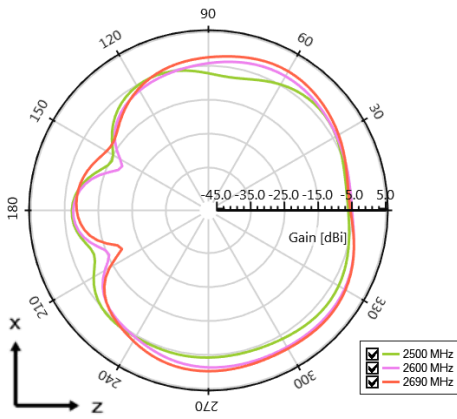




Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Layout (On-Ground)

Typical layout dimensions (mm)

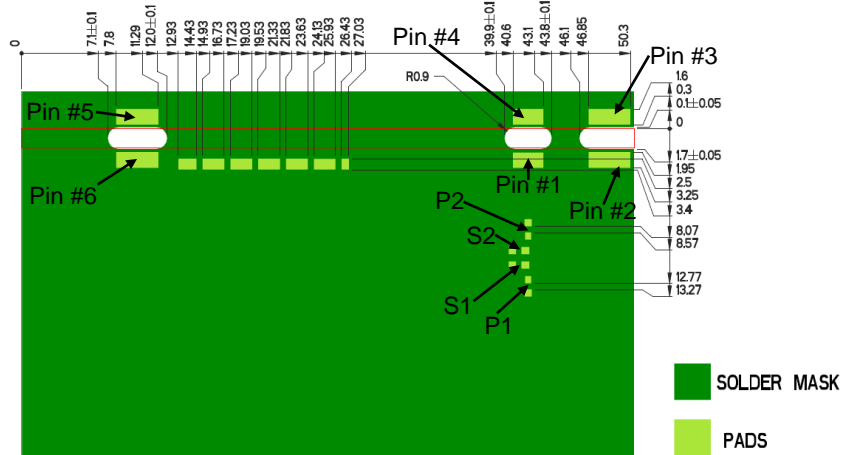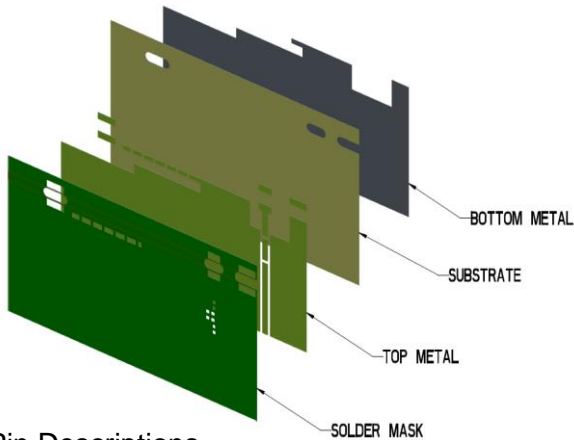




### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Dummy Pad
5	Dummy Pad
6	Dummy Pad

### Matching Pi Network + Tuning values

Component	Value	Tolerance
P1	6.8pF	±0.1pF
S1	22nH	±5%
S2	DNI	N/A
P2	0Ω	N/A
R1 – R6	DNI	N/A

Default Pi Matching Network values and (R1- R6) tuning instructions can be found under Antenna Matching Structure.

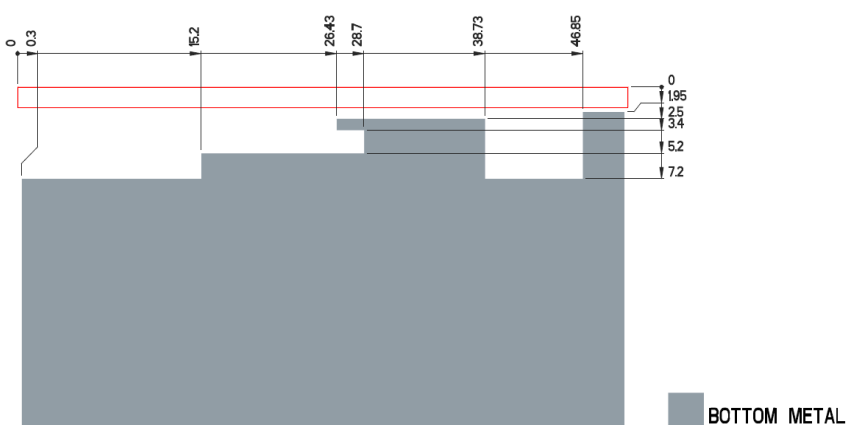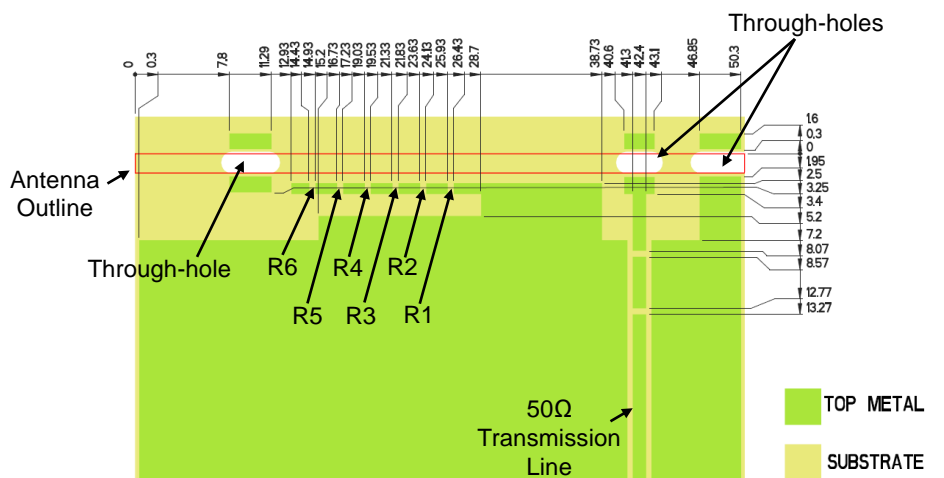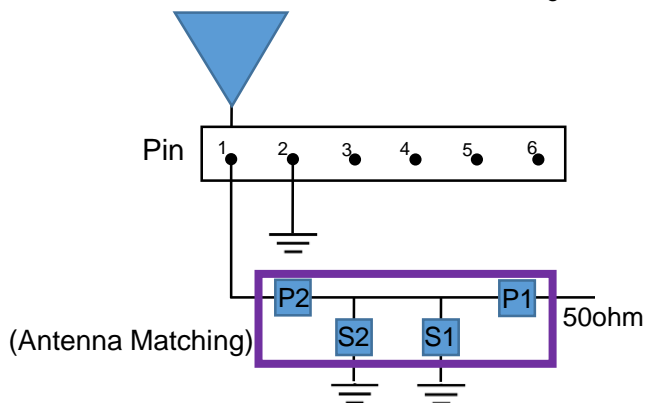






Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Matching Structure

Typical matching values on 50 x 120 mm PCB

#### Demo Board Front View

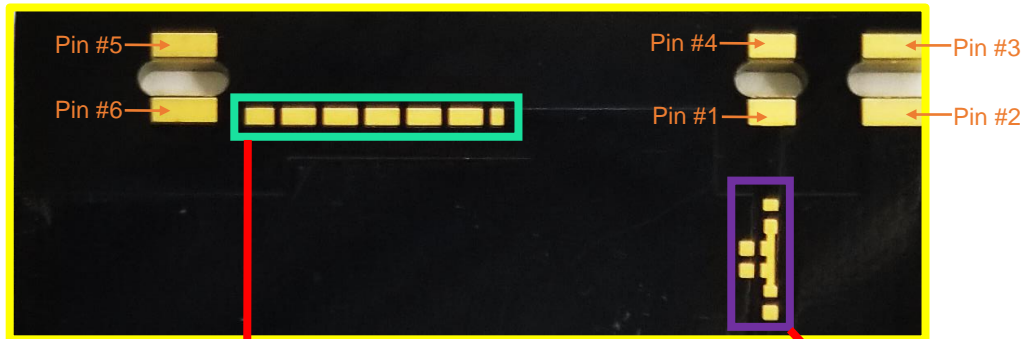

#### Low Band Tuning

#### Antenna Matching


Tune Low Band Higher  
(Unpopulate Pads)

Tune Low Band Lower  
(Add 0Ω)




#### Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Dummy Pad
5	Dummy Pad
6	Dummy Pad

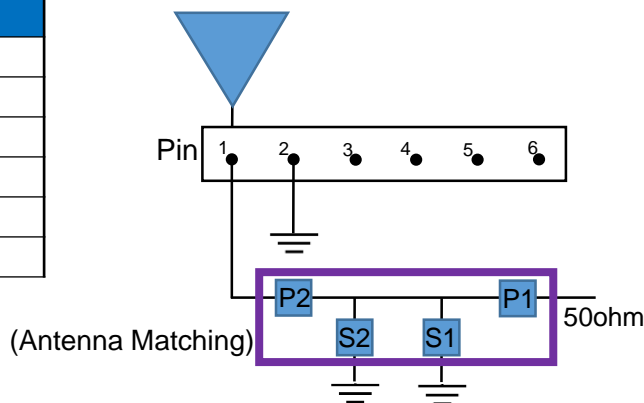

#### (Low Band Tuning)

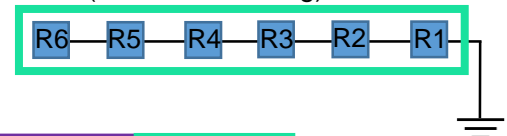

	P1	S1	S2	P2	(R1 - R6)
<b>Default Matching</b>	6.8pF	22nH	DNI	0Ω	DNI
<b>Tolerance</b>	±0.1pF	± 5%	N/A	N/A	N/A



Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


**Antenna Demo Board**

Demo Board Front/Back View

Part Number	A (mm)	B (mm)
1002436-01	120	50



**Front View**

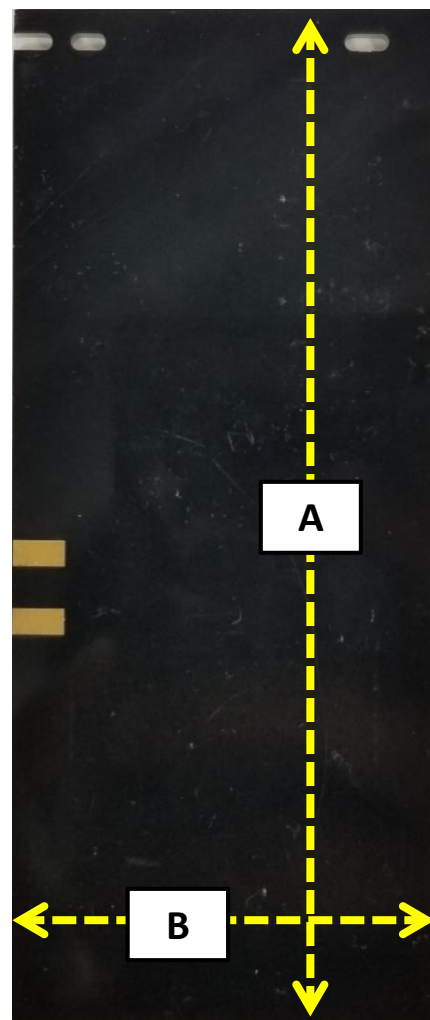


**Back View**





Broadband LTE Embedded Ethertronics' FR4 Antenna.  
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

### Recommended Reflow Soldering Profile

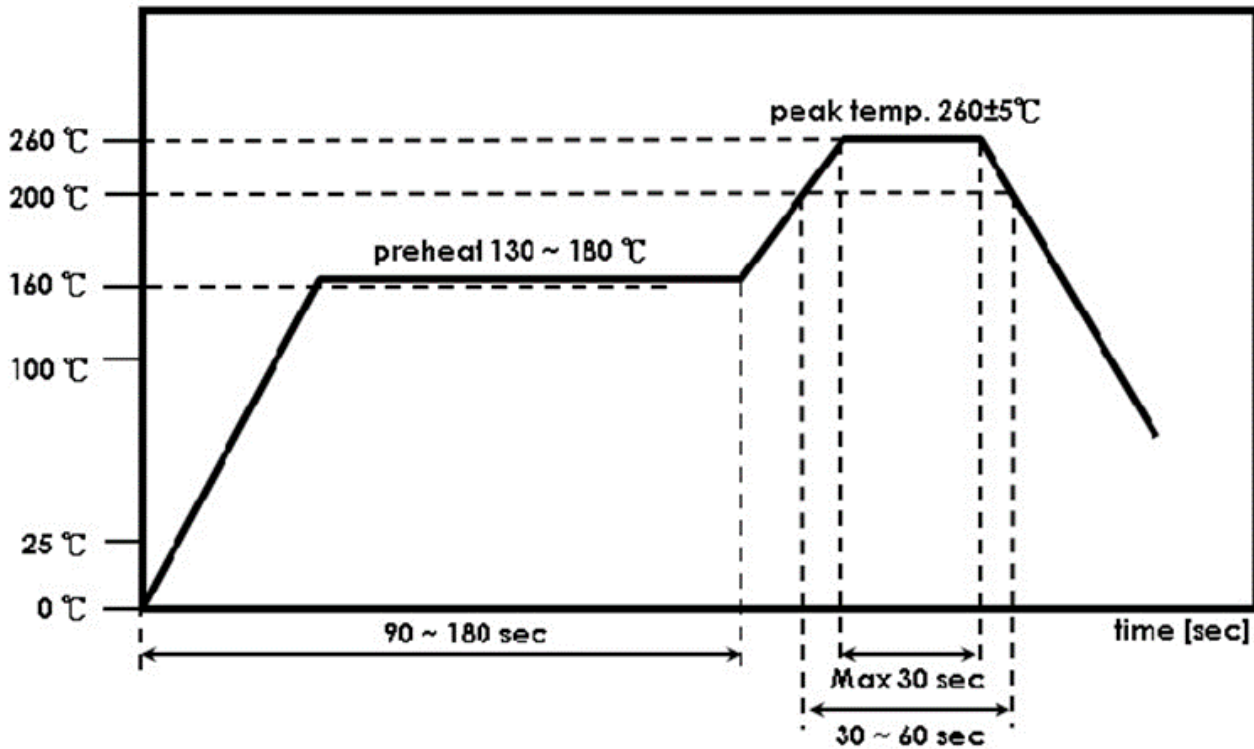

\*Adjust the reflow duration to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260° C.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AVX:](#)

[1002436](#)