


FEATURES

- 0.156" (3.96mm) Contact Spacing by 0.200" (5.08mm) Row Spacing
- Accepts .062" (1.57mm) Nominal Thickness P.C. Board
- High Profile Insulator Body, .600" (15.24mm)
- Card Slot Depth of .330" (8.38mm)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90° and Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Accepts between Contact and In-Contact Polarizing Keys
- Pre-assembled Card Guides are available
- RoHS Compliant, UL certified

Specifications:

Insulator Material	UL 94V-0 Thermoplastic Polyester
Contact Material	Copper Alloy
Contact Plating	Gold Plating on mating area and Tin Plating on tails with Nickel underplating all over
Current Rating	3 Ampere
Contact Resistance	10milliohms maximum
Dielectric Withstand Voltage	1800 VAC rms at sea level between adjacent contacts
Insulation Resistance	5000 Megaohms minimum
Operating Temperature	Operating Temperature: -40°C to +105°C
Insertion Force	16oz (4.45N) maximum per contact pair when tested with .070" (1.78mm) thick gauge
Withdrawal Force	1oz (0.28N) minimum per contact pair when tested with .054" (1.37mm) thick gauge

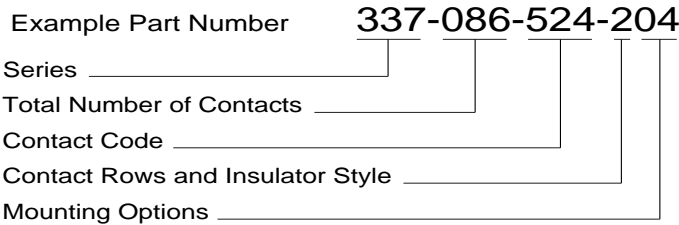

Series	Insulator Color
337	Green
387	Black

Contact Rows and Insulator Style

1	Single Row, Flush Mounting Lugs
2	Dual Row, Flush Mounting Lugs
6	Single Row, .170 (4.32) Offset Lugs
8	Dual Row, .170 (4.32) Offset Lugs

Total Number of Contacts:

006, 007, . . . 043
012, 014, . . . 086

Contact Rows

Single Row
Dual Row

Mounting Options

01	No Mounting Lug
02	Ø.128" (Ø3.25mm) Mounting Holes
03	Ø.116" (Ø2.95mm) I.D. Floating Eyelets
04	Ø.156" (Ø3.96mm) Mounting Holes
07	M3-0.5 Metric Threaded Inserts
08	#4-40 Unified Threaded Inserts
12	Ø.128" (Ø3.25mm) Side Mounting Holes
58	.468" (11.89mm) Offset Card Guides
68	.344" (8.74mm) Offset Card Guides
78	In-Line Card Guides

Contact Code	Description & Tail Size	Tail Length "G"
500	Wire Hole .050 x .025 (1.27 x 0.64)	.260 (6.60)
520	P.C. Tail .030 x .018 (0.76 x 0.46)	.175 (4.45)
521	P.C. Tail .025 Square (0.64 Square)	.150 (3.81)
523	P.C. Tail .025 Square (0.64 Square)	.390 (9.91)
524	P.C. Tail .018 Square (0.46 Square)	.175 (4.45)
540	Wire Wrap .025 Square (0.64 Square)	.560 (14.22)
541	Wire Wrap .025 Square (0.64 Square)	.750 (19.05)
542	Wire Wrap .025 Square (0.64 Square)	.645 (16.38)
544	Wire Wrap .050 x .025 (1.27 x 0.64)	.750 (19.05)
555	EXTENDER BOARD BEND (Code 500 Contacts)	
556	EXTENDER BOARD BEND (Code 520 Contacts)	
558	90 DEGREE BEND (Code 541 Contacts)	
559	90 DEGREE BEND (Code 541 Contacts)	
560	EXTENDER BOARD BEND (Code 523 Contacts)	

Ordering Code Notes:

- 1) All connector sizes up to 43 contacts single row / 086 contacts dual row are available upon request.
- 2) The 500 contact code is only available in the 337 series. Green polyphenylene sulphide insulator material will be supplied.
- 3) For details of the extender board and 90 degree bends refer to our website.
- 4) For lugless connectors, code 01 mounting, specify contact row code 1 or 2.
- 5) In-line card guides are only with offset mounting lugs.
- 6) For details of the mounting options refer to next pages.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[337-030-527-201](#) [337-036-527-202](#) [337-044-527-201](#) [337-060-600-802](#) [387-012-523-300](#) [387-012-527-201](#) [387-072-527-204](#) [337-012-520202](#) [387-056-520202](#) [337-012-527-201](#) [337-012-527-202](#) [337-012-527-204](#) [337-012-527-802](#) [337-012-527-804](#) [337-020-527-201](#) [337-020-527-202](#) [337-020-527-204](#) [337-020-527-802](#) [337-020-527-804](#) [337-024-527-201](#) [337-024-527-202](#) [337-024-527-204](#) [337-024-527-802](#) [337-024-527-804](#) [337-030-527-202](#) [337-030-527-204](#) [337-030-527-802](#) [337-030-527-804](#) [337-036-527-201](#) [337-036-527-204](#) [337-036-527-802](#) [337-036-527-804](#) [337-044-527-202](#) [337-044-527-204](#) [337-044-527-802](#) [337-044-527-804](#) [337-050-527-201](#) [337-050-527-202](#) [337-050-527-204](#) [337-050-527-802](#) [337-050-527-804](#) [337-056-527-201](#) [337-056-527-202](#) [337-056-527-204](#) [337-056-527-802](#) [337-056-527-804](#) [337-060-527-201](#) [337-060-527-202](#) [337-060-527-204](#) [337-060-527-802](#) [337-060-527-804](#) [337-072-527-201](#) [337-072-527-202](#) [337-072-527-204](#) [337-072-527-802](#) [337-072-527-804](#) [337-086-527-201](#) [337-086-527-202](#) [337-086-527-204](#) [337-086-527-802](#) [337-086-527-804](#) [387-012-527-202](#) [387-012-527-204](#) [387-012-527-802](#) [387-012-527-804](#) [387-020-527-201](#) [387-020-527-202](#) [387-020-527-204](#) [387-020-527-802](#) [387-020-527-804](#) [387-024-527-201](#) [387-024-527-202](#) [387-024-527-204](#) [387-024-527-802](#) [387-024-527-804](#) [387-030-527-201](#) [387-030-527-202](#) [387-030-527-204](#) [387-030-527-802](#) [387-030-527-804](#) [387-036-527-201](#) [387-036-527-202](#) [387-036-527-204](#) [387-036-527-802](#) [387-036-527-804](#) [387-044-527-201](#) [387-044-527-202](#) [387-044-527-204](#) [387-044-527-802](#) [387-044-527-804](#) [387-050-527-201](#) [387-050-527-202](#) [387-050-527-204](#) [387-050-527-802](#) [387-050-527-804](#) [387-056-527-201](#) [387-056-527-202](#) [387-056-527-204](#) [387-056-527-802](#) [387-056-527-804](#)