MISCELLANEOUS

ADAPTORS

BNC / 4 mm dia.BANANA ADAPTORS

These adaptors are designed to uncouple electric signals from input and output terminals of a measuring device fitted with male or female BNC fixed connectors.

CHARACTERISTICS

- Dielectric withstanding voltage
- Insulation resistance

: 2 500 V rms – 50 Hz

: $10^5 M\Omega$

Electrical termination centre contact ground terminal

: red terminal : black terminal

Packaging individually.

Part number	Description	Dimensions
R 191 453	BNC male / 2 – 4 mm dia. sockets adaptor	2 hoies Ø 2.8 (0.110) Dia.
R 191 455	BNC female / 2 – 4 mm dia. plugs adaptor	


CHARACTERISTICS

Dielectric withstanding voltage

I®

Insulation resistance

- : 750 V rms 50 Hz
- $\geq 5000 M\Omega$

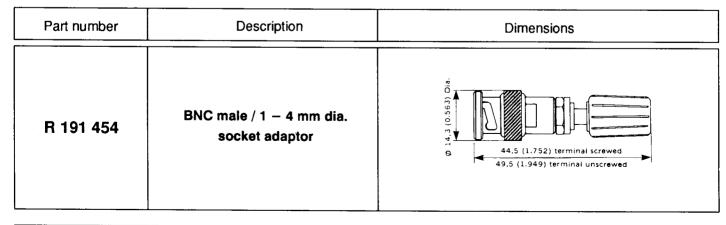



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall: <u>R191453000</u>