

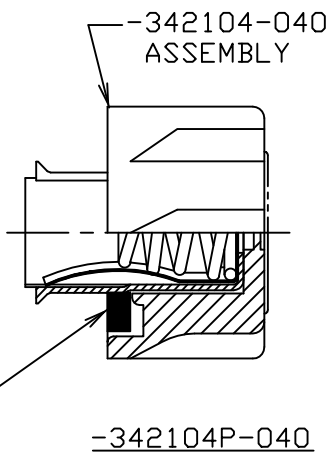
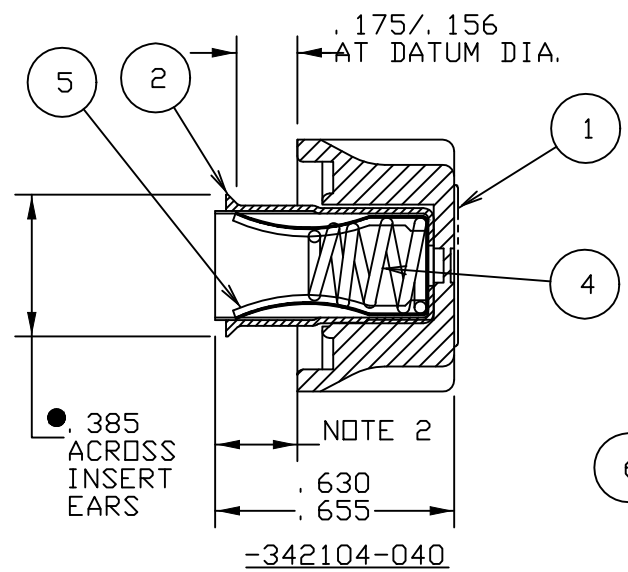

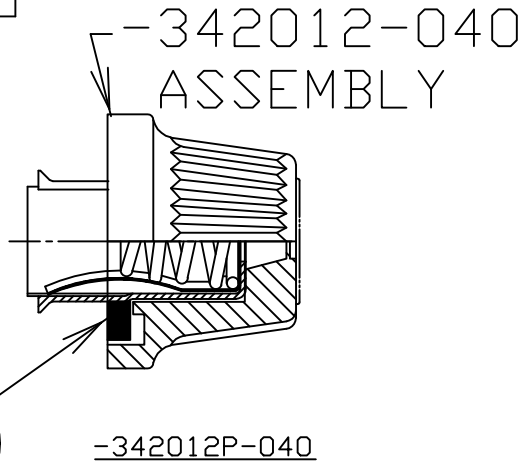


PART No.	KNOB ①	WASHER ⑥
-342012-040	-342012-200	N/A
-342012P-040	-342012-200	-901-124
-342104-040	-342104-200	N/A
-342104P-040	-342104-200	-901-124

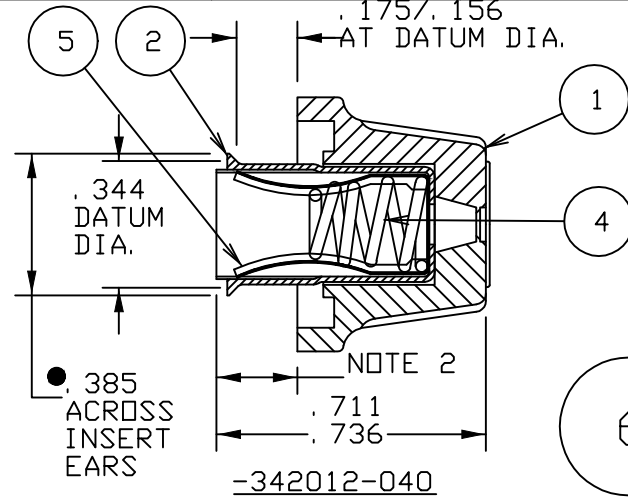

PACKAGING NOTES:
ASSEMBLIES ARE USED INTERNALLY FOR PACKAGING REQUIREMENTS. NO PACKAGING REQUIRED.

GENERAL NOTES:

- KNOB INSERT TO BE FULLY SEATED IN KNOB.
- THIS AREA OF INSERT AND THE INSIDE OF THE INSERT MUST BE FREE OF ADHESIVE.
- ADHESIVE IS APPLIED INSIDE THE KNOB TO SECURE THE INSERT.

INSPECTION NOTES:

- THE INSERT TO KNOB ASSEMBLY MUST WITHSTAND THE FOLLOWING TESTS WITHOUT LOOSENING:
5.0 IN-LB TORQUE
15 LB AXIAL PUSH
10 LB AXIAL PULL
- ASSEMBLY MUST FUNCTION WITH FUSES 0.246 AND 0.254 DIA. AFTER WITHSTANDING (10) INSERTION CYCLES OF A 0.254 DIA. PLUG GAGE OR MAX FUSE GAGE G-0679 TO A DEPTH OF 0.290". THE KNOB ASSEMBLY MUST BE ABLE TO RETAIN A 0.246 DIA. PLUG
- KNOB TO BODY FIT MUST BE ABLE TO WITHSTAND 4.5 IN-LB OF TORQUE WITHOUT STRIPPING.
- THE ASSEMBLIES WITH WASHERS MUST BE INSPECTED TO ASSURE THEIR CAPABILITY TO MATE WITH AND ASSEMBLE CORRECTLY TO THE APPROPRIATE BODY ASSEMBLY.

6	SEE CHART	WASHER, KNOB	EA	1000
5	883-030	CONTACT SPRING CLIP	EA	1000
4	-912-249	SPRING	EA	1000
3	-087121	ADHESIVE	LB	0.016
2	-342004-6	KNOB INSERT	EA	1000
1	SEE CHART	KNOB	EA	1000
NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC		FINISH	
DRW	JMB	DATE	4/2/98
CHK		DATE	
APPD		DATE	
COPIES TO		SCALE	2=1
1	9 18	SUPER DRW	
2	10 19	RAW STK WT	LBS/M
3	12 20	TOLERANCE UNLESS OTHERWISE SPECIFIED	
4	13 21	TWO PLACE DEC ±.01	
5	14 23	THREE PLACE DEC ±.005	
6	15 33	ANGULAR ±1°	
7	16 43		
8	17 53		

TITLE
3AG PANEL MOUNT FUSEHOLDER
KNOB ASSEMBLY

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION J
DRAWG. NO. -342000-040
SERIES

LTR	REVISION	CHK	APD
G	39252C- REVISED & REDRAWN ON NEW FORMAT 6/30/98 JMB		
H	507554ECE/C-DN BDM, CHG. CLIP P/N. 02/28/13 MLB	H. SALTINAS	H. SALTINAS
J	509860ECE/C-DN BDM, CHG. CLIP P/N. 12/26/13 MLB	H. SALTINAS	H. SALTINAS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.
DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[03420012HX040](#)