
413
350

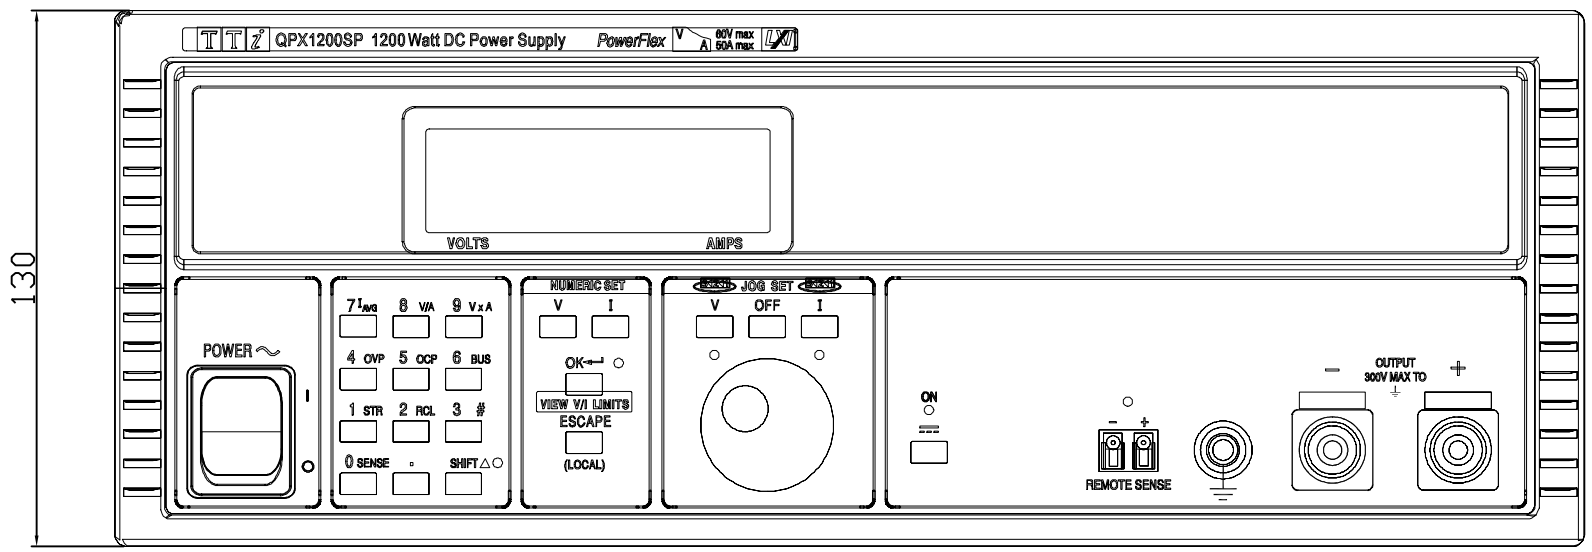
130
QPX1200SP 1200 Watt DC Power Supply
PowerFlex
60V max
50A max
VOLTS
AMPS
POWER
7 AVG
8 V/A
9 V x A
4 OVP
5 OCP
6 BUS
1 STR
2 RCL
3 #
0 SENSE
SHIFT
NUMERIC SET
V
I
OK
VIEW V/I LIMITS
ESCAPE
(LOCAL)
JOG SET
V
OFF
I
ON
REMOTE SENSE
OUTPUT
300V MAX TO

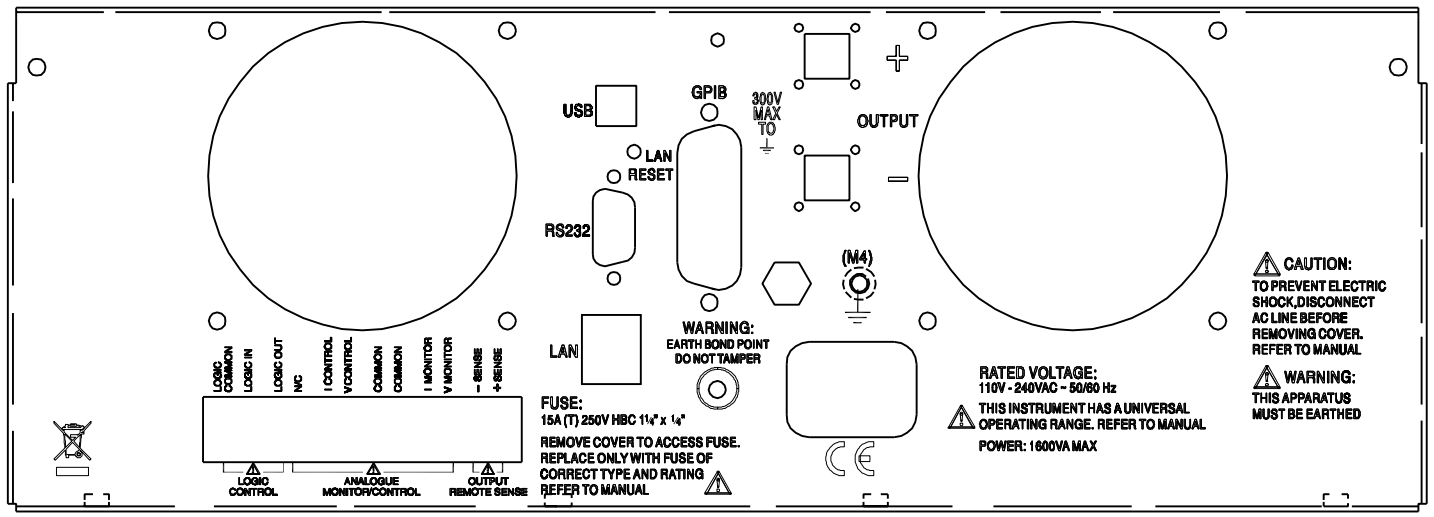
USB
GPIB
300V MAX TO
OUTPUT
LAN
RESET
RS232
(M4)
LAN
WARNING:
EARTH BOND POINT
DO NOT TAMPER
LOGIC COMMON
LOGIC IN
LOGIC OUT
NC
I CONTROL
V CONTROL
COMMON
COMMON
I MONITOR
V MONITOR
– SENSE
+ SENSE
LOGIC CONTROL
ANALOGUE MONITOR/CONTROL
OUTPUT REMOTE SENSE
FUSE:
15A (T) 250V HBC 11/4" x 1/4"
REMOVE COVER TO ACCESS FUSE.
REPLACE ONLY WITH FUSE OF
CORRECT TYPE AND RATING
REFER TO MANUAL
RATED VOLTAGE:
110V - 240VAC ~ 50/60 Hz
THIS INSTRUMENT HAS A UNIVERSAL
OPERATING RANGE. REFER TO MANUAL
POWER: 1600VA MAX
CAUTION:
TO PREVENT ELECTRIC
SHOCK,DISCONNECT
AC LINE BEFORE
REMOVING COVER.
REFER TO MANUAL
WARNING:
THIS APPARATUS
MUST BE EARTHED